



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-19T0015  
Page (1) of (110)

# TEST REPORT

## Part 15 Subpart E 15.407

**Equipment under test** NETWORK VIDEO RECORDER

**Model name** TRM-810S

**FCC ID** NLMTRM810S

**Applicant** Hanwha Techwin Co., Ltd.

**Manufacturer** Hanwha Techwin (Tianjin) Co.,Ltd.  
Hanwha Techwin Security Vietnam Co.,Ltd.  
D-TECH Co.,Ltd.

**Date of test(s)** 2019.01.07 ~ 2019.01.30

**Date of issue** 2019.02.14

**Issued to**


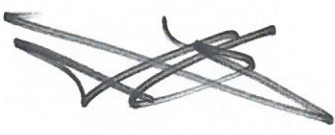
**Hanwha Techwin Co., Ltd.**

6, Pangyo-ro 319 Beon-gil, Bundang-gu Seongnam-si,  
Gyeonggi-do, 13488, Korea  
Tel: +82-70-7147-8361/ Fax: +82-31-8108-3717

**Issued by**

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,  
Gyeonggi-do, Korea  
473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450

| Test and report completed by :  | Report approval by :   |
|---|--|
|  |  |
| Young-Jin Lee<br>Test engineer  | Hyeon-Su, Jang<br>Technical manager  |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-19T0015  
Page (2) of (110)

---

**Revision history**

| <b>Revision</b> | <b>Date of issue</b> | <b>Test report No.</b> | <b>Description</b> |
|-----------------|----------------------|------------------------|--------------------|
| -               | 2019.02.14           | KES-RF-19T0015         | Initial            |

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



---

## TABLE OF CONTENTS

|             |  |     |
|-------------|--|-----|
| 1.          | General information .....                      | 4   |
| 1.1.        | EUT description .....                          | 4   |
| 1.2.        | Test configuration.....                        | 5   |
| 1.3.        | Accessory information .....                    | 5   |
| 1.4.        | Software and Firmware description.....         | 5   |
| 1.5.        | Measurement results explanation example.....   | 6   |
| 1.6.        | Measurement Uncertainty .....                  | 6   |
| 1.7.        | Frequency/channel operations.....              | 7   |
| 1.8.        | Maximum average output power.....              | 7   |
| 2.          | Summary of tests.....                          | 8   |
| 3.          | Test results.....                              | 9   |
| 3.1.        | 26 dB bandwidth & 99% Occupied Bandwidth ..... | 9   |
| 3.2.        | 6 dB bandwidth .....                           | 22  |
| 3.3.        | Maximum conducted output power.....            | 27  |
| 3.4.        | Power spectral density.....                    | 32  |
| 3.5.        | Frequency Stability.....                       | 42  |
| 3.6.        | Radiated restricted band and emissions.....    | 47  |
| Appendix A. | Measurement equipment .....                    | 109 |
| Appendix B. | Test setup photos .....                        | 110 |



## 1. General information

Applicant: Hanwha Techwin Co., Ltd.  
Applicant address: 6, Pangyo-ro 319 Beon-gil, Bundang-gu Seongnam-si,  
Gyeonggi-do, 13488, Korea  
Test site: KES Co., Ltd.  
Test site address: 3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, Korea  
473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea  
Test Facility: FCC Accreditation Designation No.: KR0100, Registration No.: 444148  
FCC rule part(s): 15.247  
FCC ID: NLMTRM810S  
Test device serial No.:  Production  Pre-production  Engineering

### 1.1. EUT description

Equipment under test: NETWORK VIDEO RECORDER  
Frequency range: UNII-1 5 180 MHz ~ 5 240 MHz (11ac\_VHT20)  
5 190 MHz ~ 5 230 MHz (11ac\_VHT40)  
5 210 MHz (11ac\_VHT80)  
UNII-2A 5 260 MHz ~ 5 320 MHz (11ac\_VHT20)  
5 270 MHz ~ 5 310 MHz (11ac\_VHT40)  
5 290 MHz (11ac\_VHT80)  
UNII-2C 5 500 MHz ~ 5 720 MHz (11ac\_VHT20)  
5 510 MHz ~ 5 710 MHz (11ac\_VHT40)  
5 530 MHz ~ 5 690 MHz (11ac\_VHT80)  
UNII-3 5 745 MHz ~ 5 825 MHz (11ac\_VHT20)  
5 755 MHz ~ 5 795 MHz (11ac\_VHT40)  
5 775 MHz (11ac\_VHT80)  
GPS 1 575.42 MHz (GPS)  
Model: TRM-810S  
Modulation technique: OFDM  
Antenna specification: 5 GHz\_UNII 1, 2A // Dipole Antenna & 2.72 dBi  
5 GHz\_UNII 2C // Dipole Antenna & 3.45 dBi  
5 GHz\_UNII 3 // Dipole Antenna & 5.63 dBi  
Power source: DC 9V~36V

Number of channels    5 180 MHz ~ 5 240 MHz (11ac\_VHT20) : 4ch  
                           5 190 MHz ~ 5 230 MHz (11ac\_VHT40) : 2ch  
                           5 210 MHz (11ac\_VHT80) : 1ch  
                           5 260 MHz ~ 5 320 MHz (11ac\_VHT20) : 4ch  
                           5 270 MHz ~ 5 310 MHz (11ac\_VHT40) : 2ch  
                           5 290 MHz (11ac\_VHT80) : 1ch  
                           5 500 MHz ~ 5 720 MHz (11ac\_VHT20) : 12ch  
                           5 510 MHz ~ 5 710 MHz (11ac\_VHT40) : 6ch  
                           5 530 MHz ~ 5 690 MHz (11ac\_VHT80) : 3ch  
                           5 745 MHz ~ 5 825 MHz (11ac\_VHT20) : 5ch  
                           5 755 MHz ~ 5 795 MHz (11ac\_VHT40) : 2ch  
                           5 775 MHz (11ac\_VHT80) : 1ch  
                           1 575.42 MHz (GPS) : 1ch

**1.2. Test configuration**

The **Hanwha Techwin Co., Ltd. NETWORK VIDEO RECORDER FCC ID: NLMTRM810S** was tested according to the specification of EUT, the EUT must comply with following standards and KDB documents.

FCC Part 15.407  
 KDB 789033 D02 v02r01  
 ANSI C63.10-2013

**1.3. Accessory information**

| Equipment   | Manufacturer                      | Model | Serial No. | Power source |
|-------------|-----------------------------------|-------|------------|--------------|
| Control Box | Hanwha Techwin(Tianjin) Co., Ltd. | -     | -          | -            |

**1.4. Software and Firmware description**

The software and firmware installed in the EUT is version V1.00\_190129183607

### 1.5. Measurement results explanation example

For all conducted test items :

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 1.70 + 10 = 11.70 \text{ (dB)} \end{aligned}$$

### 1.6. Measurement Uncertainty

| Test Item   |              | Uncertainty |
|---|--------------|-------------|
| Uncertainty for Conduction emission test  |              | 2.62 dB     |
| Uncertainty for Radiation emission test<br>(include Fundamental emission)   | 9kHz - 30MHz | 4.54 dB     |
|   | 30MHz - 1GHz | 4.36 dB     |
|   | Above 1GHz   | 5.00 dB     |
| Note. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2. |              |             |

## 1.7. Frequency/channel operations

**UNII-1**

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 36  | 5 180           |
| 44  | 5 220           |
| 48  | 5 240           |

**UNII-2A**

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 52  | 5 260           |
| 56  | 5 280           |
| 64  | 5 320           |

**UNII-2C**

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 100 | 5 500           |
| 120 | 5 600           |
| 144 | 5 720           |

**UNII-3**

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 149 | 5 745           |
| 157 | 5 785           |
| 165 | 5 825           |

**Table 1.7-1. 802.11ac\_VHT20 mode**

**UNII-1**

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 38  | 5 190           |
| 46  | 5 230           |

**UNII-2A**

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 54  | 5 270           |
| 62  | 5 310           |

**UNII-2C**

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 102 | 5 510           |
| 118 | 5 590           |
| 142 | 5 710           |

**UNII-3**

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 151 | 5 755           |
| 159 | 5 795           |

**Table 1.7-2. 802.11ac\_VHT40 mode**

**UNII-1**

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 42  | 5 210           |

**UNII-2A**

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 58  | 5 290           |

**UNII-2C**

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 106 | 5 530           |
| 122 | 5 610           |
| 138 | 5 690           |

**UNII-3**

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 155 | 5 775           |

**Table 1.7-3. 802.11ac\_VHT80 mode**

## 1.8. Maximum average output power

Refer to the average output power.

Note.

- Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.
- Worst-case data rates as provided by the client were:  
 UNII-1 ac\_VHT20 : **MCS8**, ac\_VHT40/80 : **MCS9**  
 UNII-2A ac\_VHT20 : **MCS8**, ac\_VHT40/80 : **MCS9**  
 UNII-2C ac\_VHT20 : **MCS8**, ac\_VHT40/80 : **MCS9**  
 UNII-3 ac\_VHT20 : **MCS8**, ac\_VHT40/80 : **MCS9**
- This report contains the worst case data from the following mode of the test in 20/40/80 MHz signal bandwidth.

## 2. Summary of tests

| Reference     | Parameter  | Test results          |
|---------------|--|-----------------------|
| 15.407(a)     | 26 dB bandwidth & 99 % Occupied Bandwidth                                      | Pass                  |
| 15.407(e)     | 6 dB bandwidth   | Pass                  |
| 15.407(a)     | Maximum conducted output power   | Pass                  |
| 15.407(a)     | Power spectral density   | Pass                  |
| 15.407(g)     | Frequency stability  | Pass                  |
| 15.205 15.209 | Radiated restricted band and emission  | Pass                  |
| 15.407(d)     | General field strength limit<br>(Restricted bands and radiated emission limit) | Pass                  |
| 15.207        | AC power line conducted emissions  | N/A <sup>Note.1</sup> |

**Note.**


1. This device doesn't required AC conducted emission test because only use DC power.



### 3. Test results

#### 3.1. 26 dB bandwidth & 99% Occupied Bandwidth

##### Test setup



##### Test procedure

##### 26 dB bandwidth

KDB 789033 D02 v02r01- Section C.1

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

##### Limit

N/A

##### 99 % bandwidth

KDB 789033 D02 v02r01- Section D

1. Set span = 1.5 times to 5.0 times the OBW.
2. Set RBW = 1% to 5% of the OBW
3. Set the VBW > 3 x RBW.
4. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak bandwidth function of the instrument (if available).
5. Use the 99% power bandwidth function of the instrument (if available).
6. If the instrument does not have a 99% power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

In the result,


-DFS requirements are not applicable in the 5 150 MHz ~ 5 250 MHz.

### Test results


| Band                               | Frequency(MHz) | Mode   | 26 dB bandwidth(MHz) | 99 % bandwidth(MHz) |        |
|------------------------------------|----------------|--------|----------------------|---------------------|--------|
| UNII-1                             | 5 180          | VHT20  | 21.129               | 17.873              |        |
|                                    | 5 220          |        | 20.912               | 17.800              |        |
|                                    | 5 240          |        | 20.695               | 17.728              |        |
| UNII-2A                            | 5 260          |        | 20.912               | 17.873              |        |
|                                    | 5 280          |        | 20.839               | 17.945              |        |
|                                    | 5 320          |        | 20.839               | 17.728              |        |
| UNII-2C                            | 5 500          |        | 20.550               | 17.728              |        |
|                                    | 5 600          |        | 20.622               | 17.800              |        |
|                                    | 5 720          |        | 20.695               | 17.945              |        |
| UNII-3                             | 5 745          |        | 20.622               | 17.728              |        |
|                                    | 5 785          |        | 20.622               | 17.873              |        |
|                                    | 5 825          |        | 20.695               | 17.873              |        |
| UNII-1                             | 5 190          |        | VHT40                | 42.840              | 36.700 |
|                                    | 5 230          |        |                      | 42.260              | 37.279 |
| UNII-2A                            | 5 270          |        |                      | 41.790              | 36.932 |
|                                    | 5 310          | 42.840 |                      | 36.816              |        |
| UNII-2C                            | 5 510          | 42.490 |                      | 37.048              |        |
|                                    | 5 590          | 40.980 |                      | 36.932              |        |
|                                    | 5 710          | 42.140 |                      | 36.816              |        |
| UNII-3                             | 5 755          | 43.300 |                      | 37.164              |        |
|                                    | 5 795          | 42.140 |                      | 37.279              |        |
| UNII-1                             | 5 210          | VHT80  |                      | 82.490              | 75.716 |
| UNII-2A                            | 5 290          |        |                      | 81.620              | 75.543 |
| UNII-2C                            | 5 530          |        |                      | 82.140              | 75.543 |
|                                    | 5 610          |        |                      | 82.660              | 75.543 |
|                                    | 5 690          |        |                      | 82.840              | 75.543 |
| UNII-3                             | 5 775          |        |                      | 83.010              | 75.890 |
| UNII-2C<br>(Band-crossing channel) | 5 720          |        | VHT20                | 15.420              | -      |
|                                    | 5 710          | VHT40  | 36.300               | -                   |        |
|                                    | 5 690          | VHT80  | 76.130               | -                   |        |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr


**26 dB bandwidth**

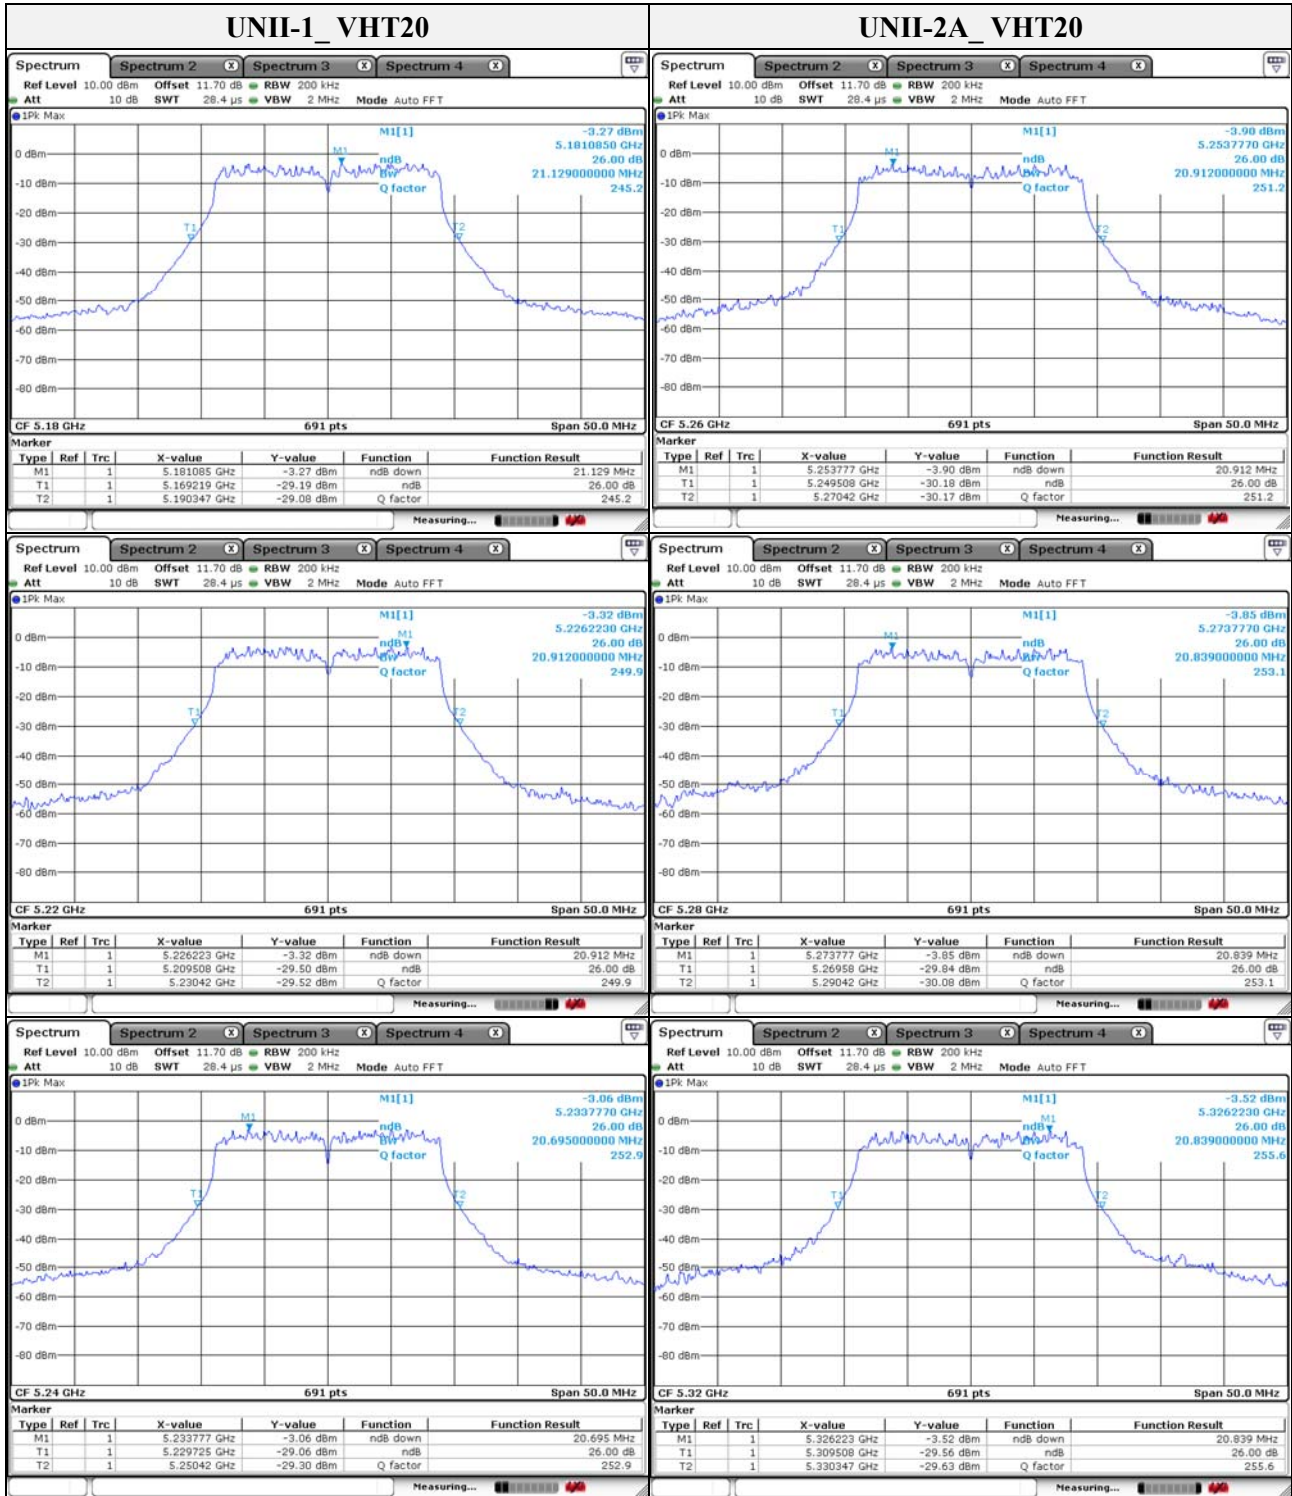


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

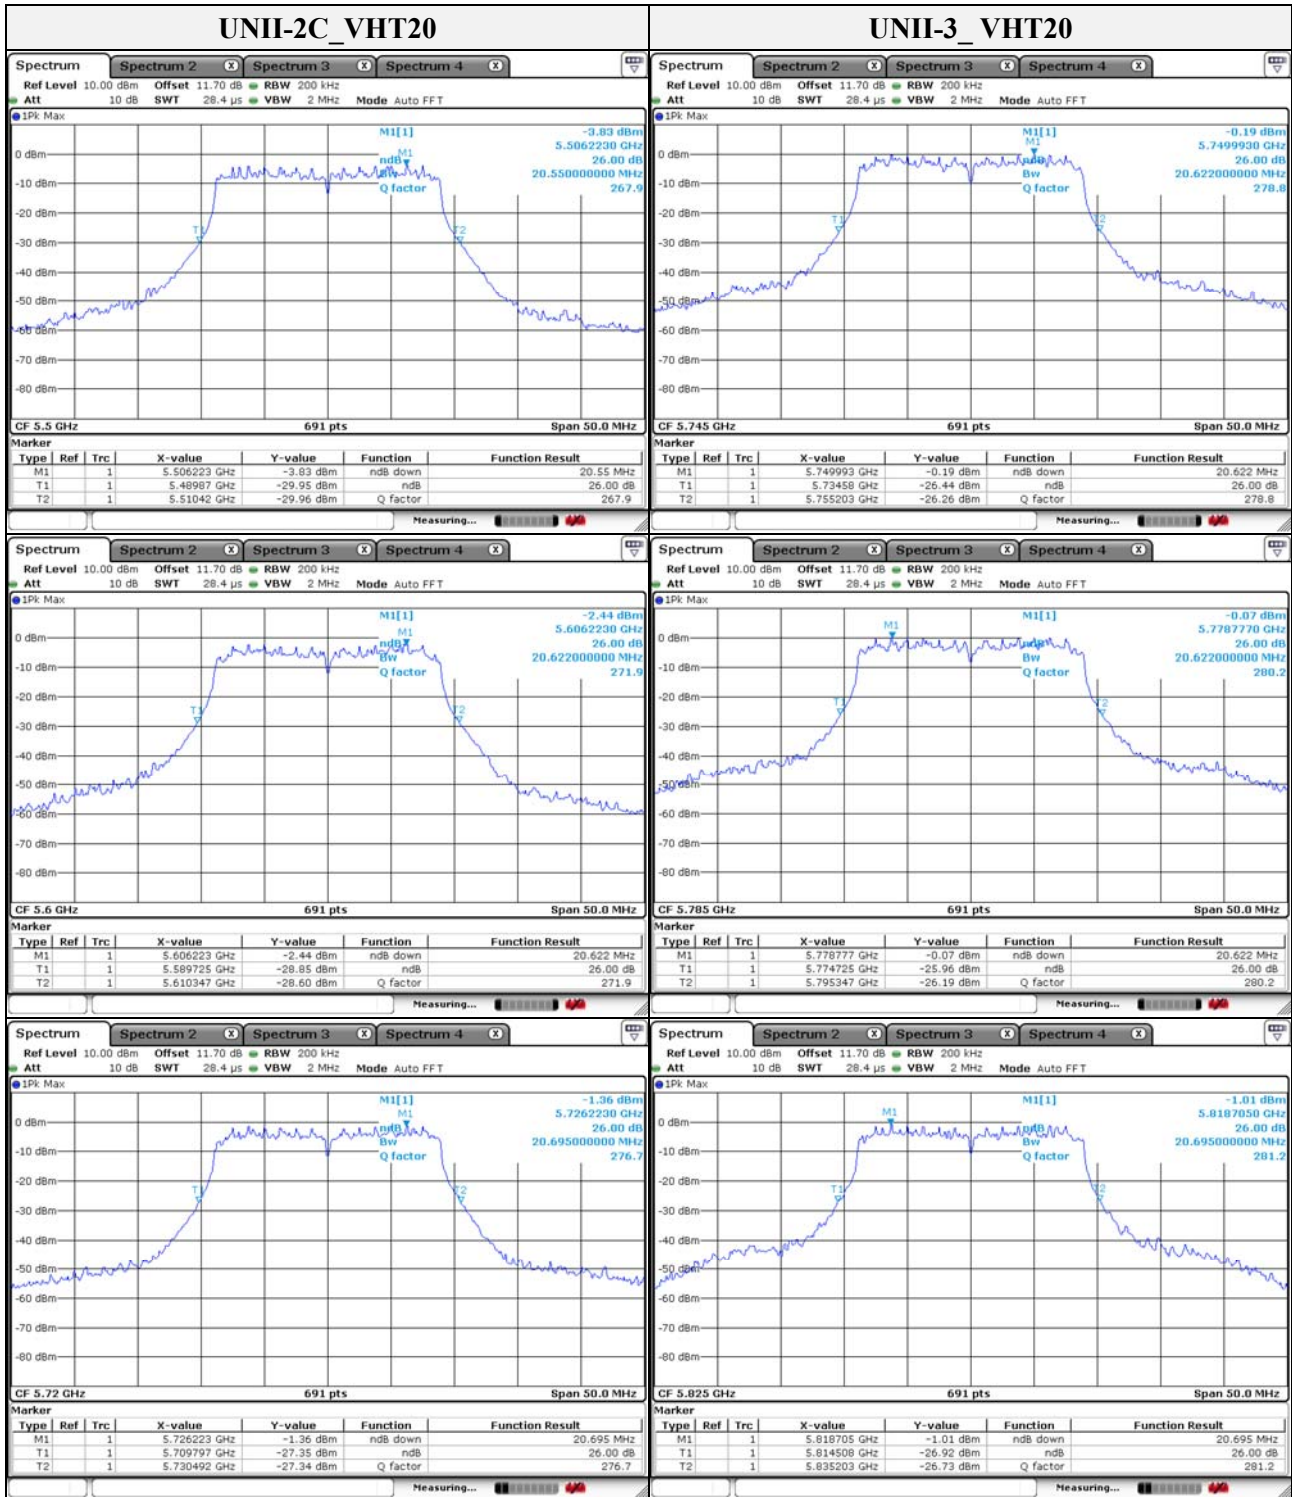


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

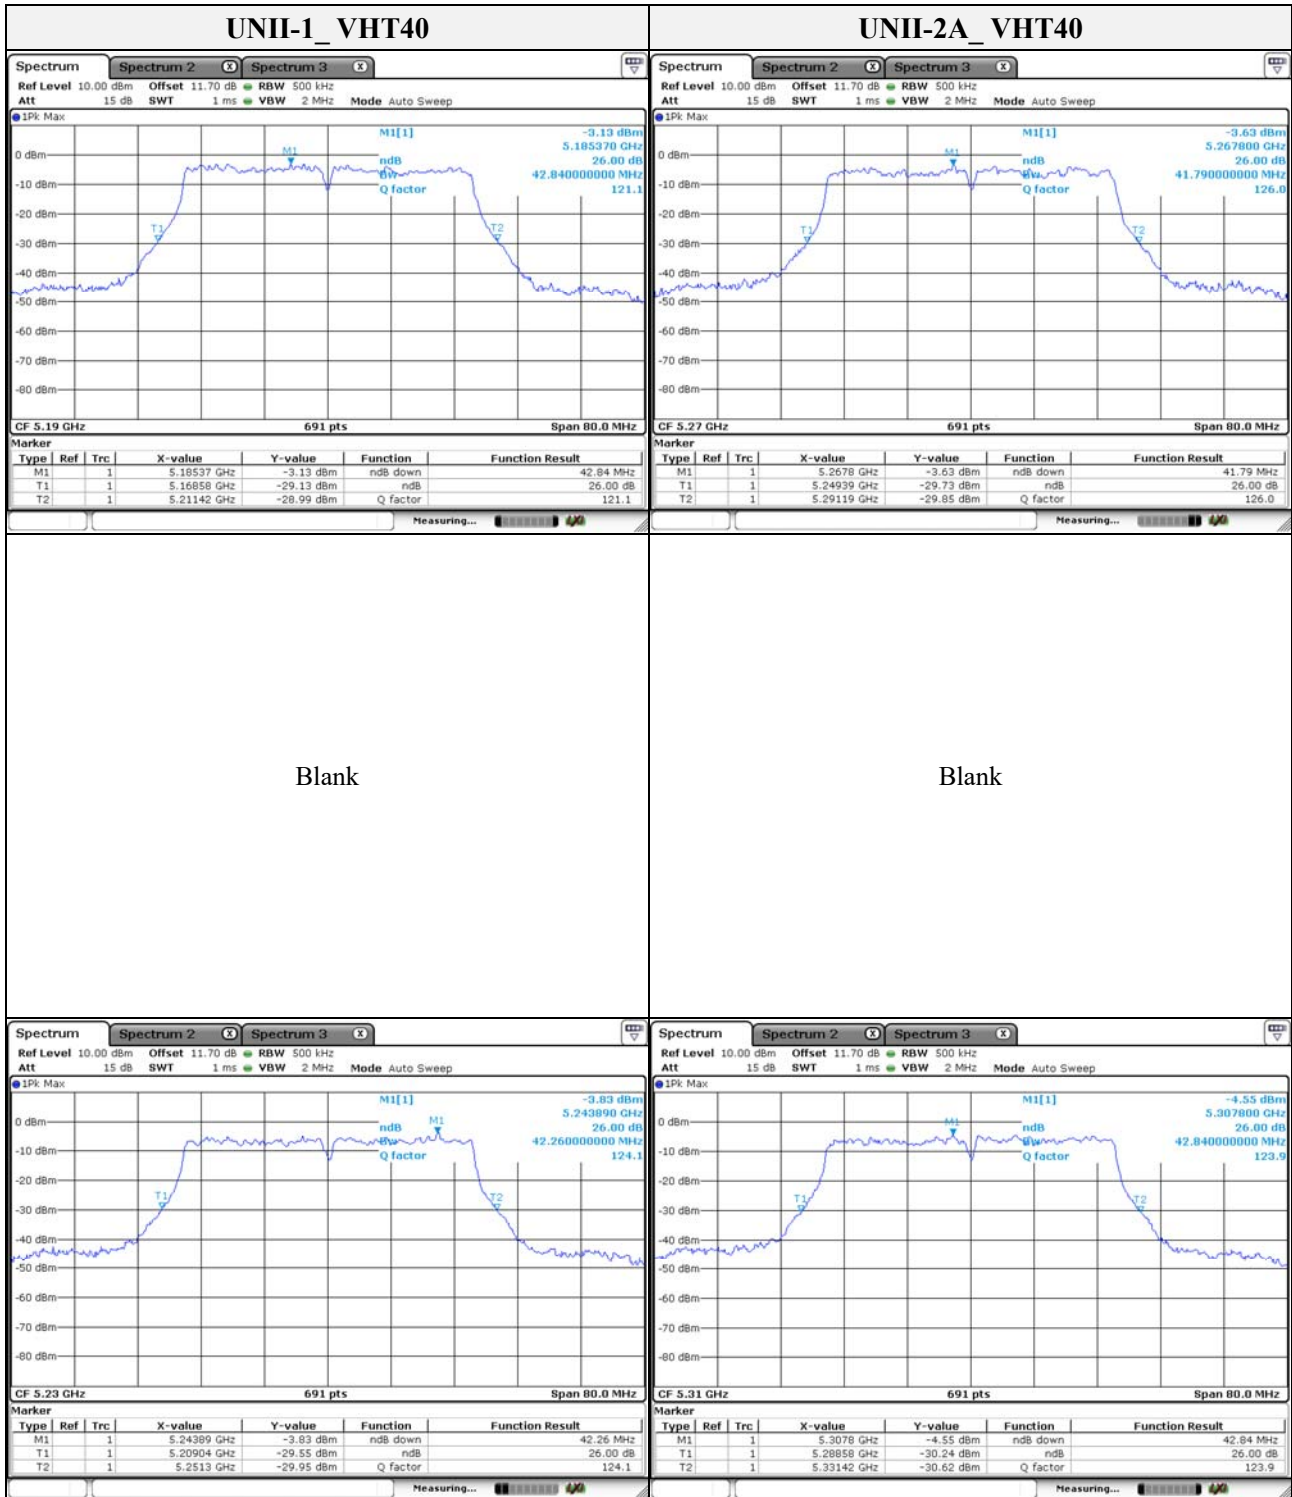

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

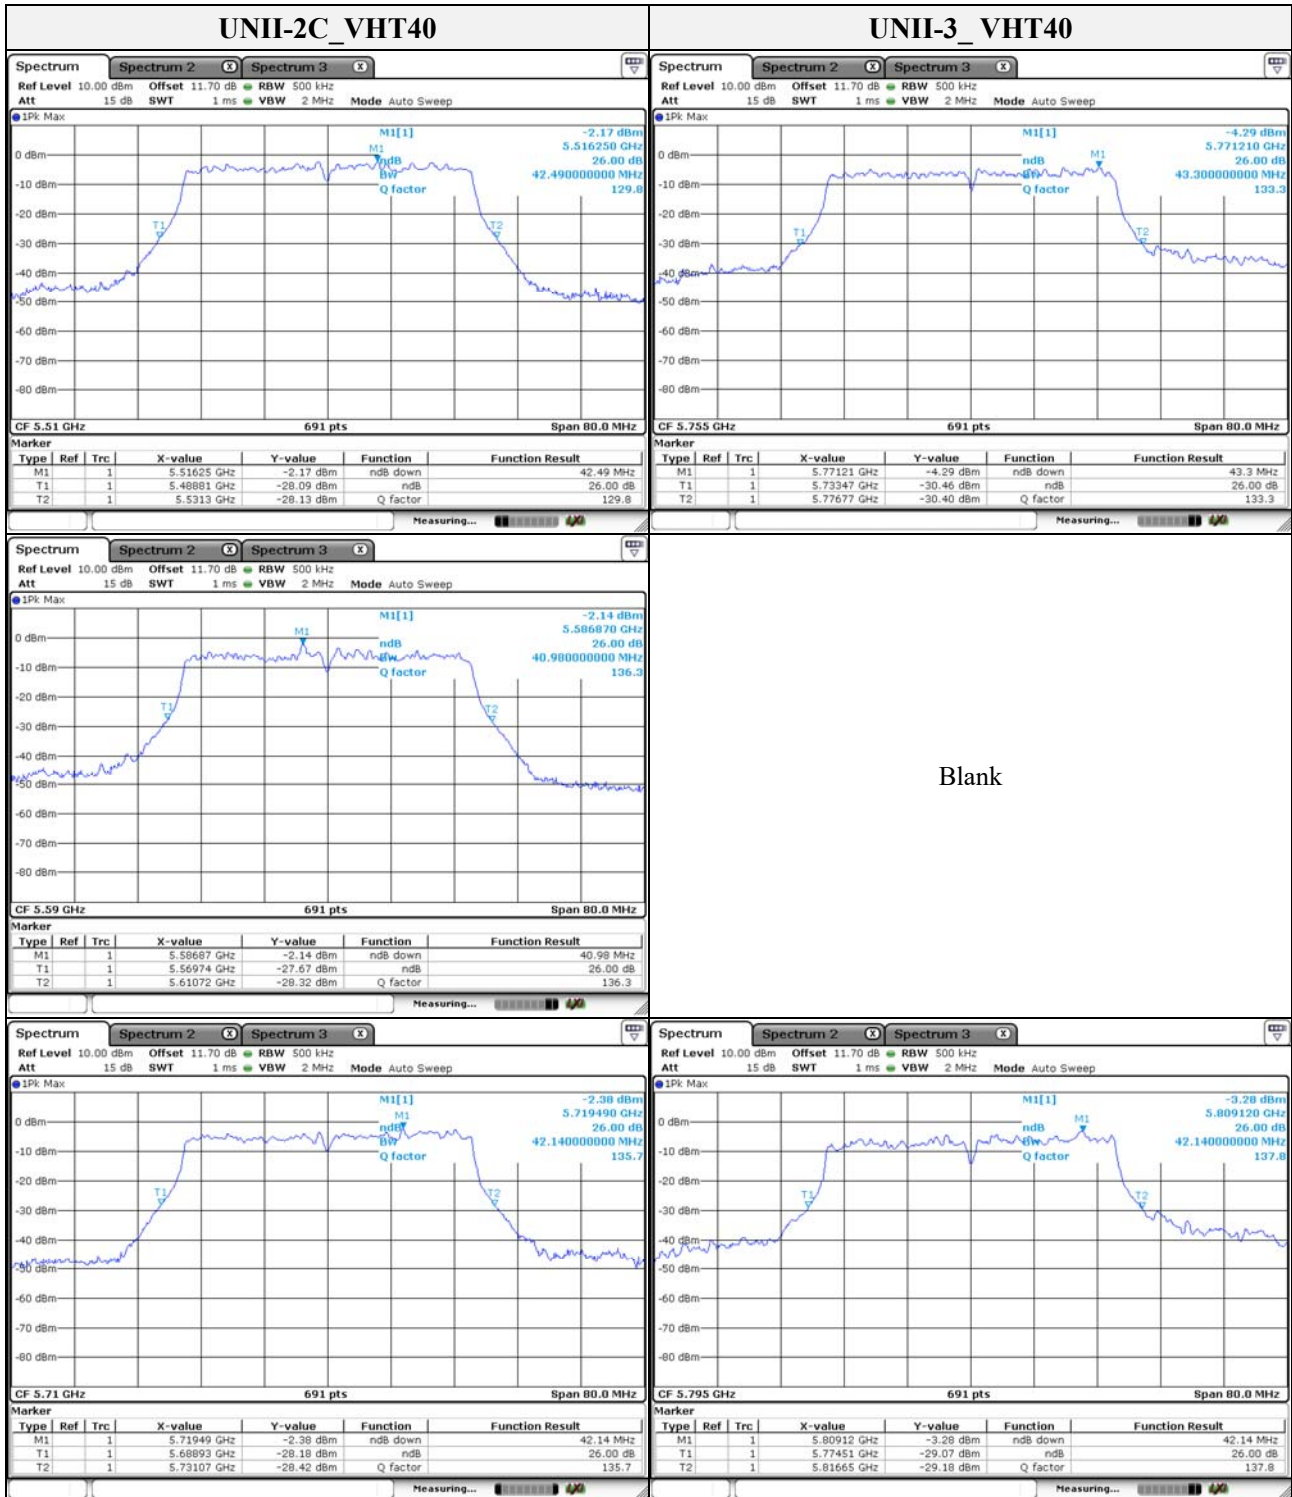


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

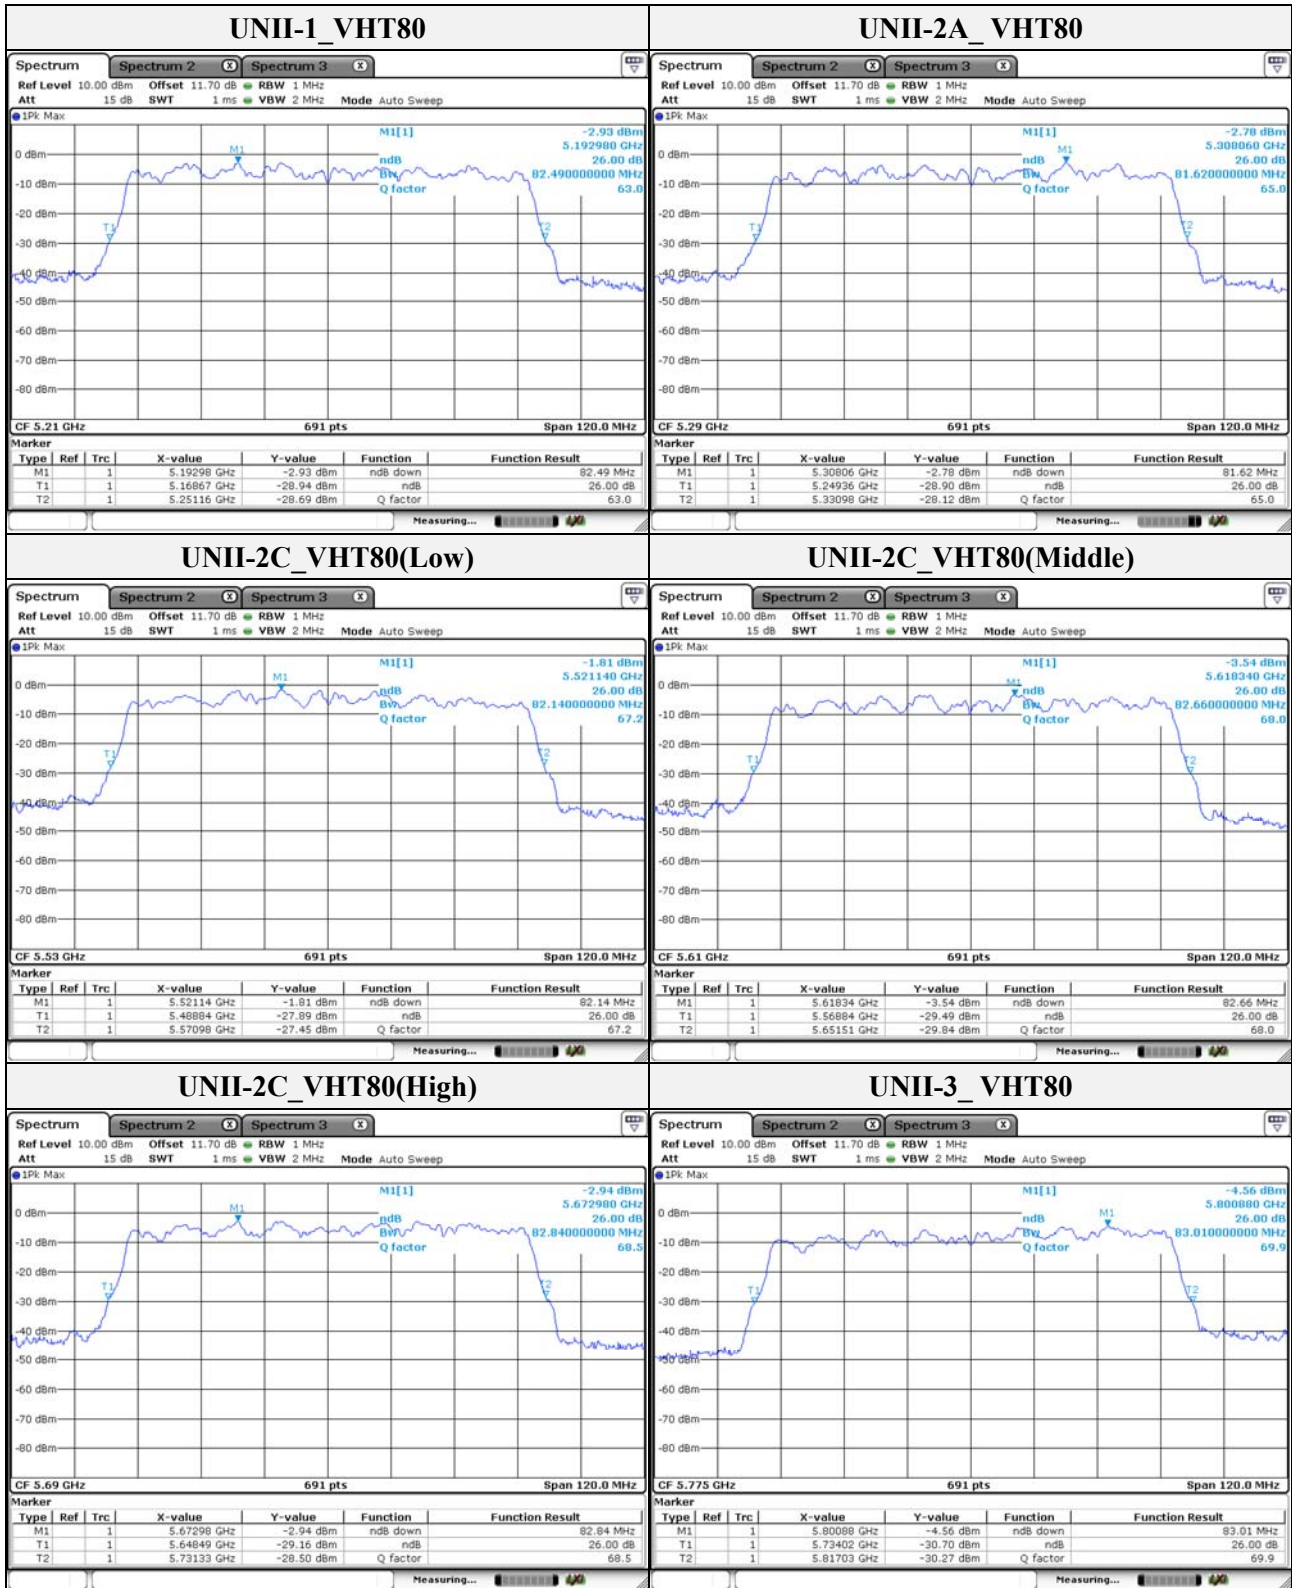

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr


**Band-crossing channels**

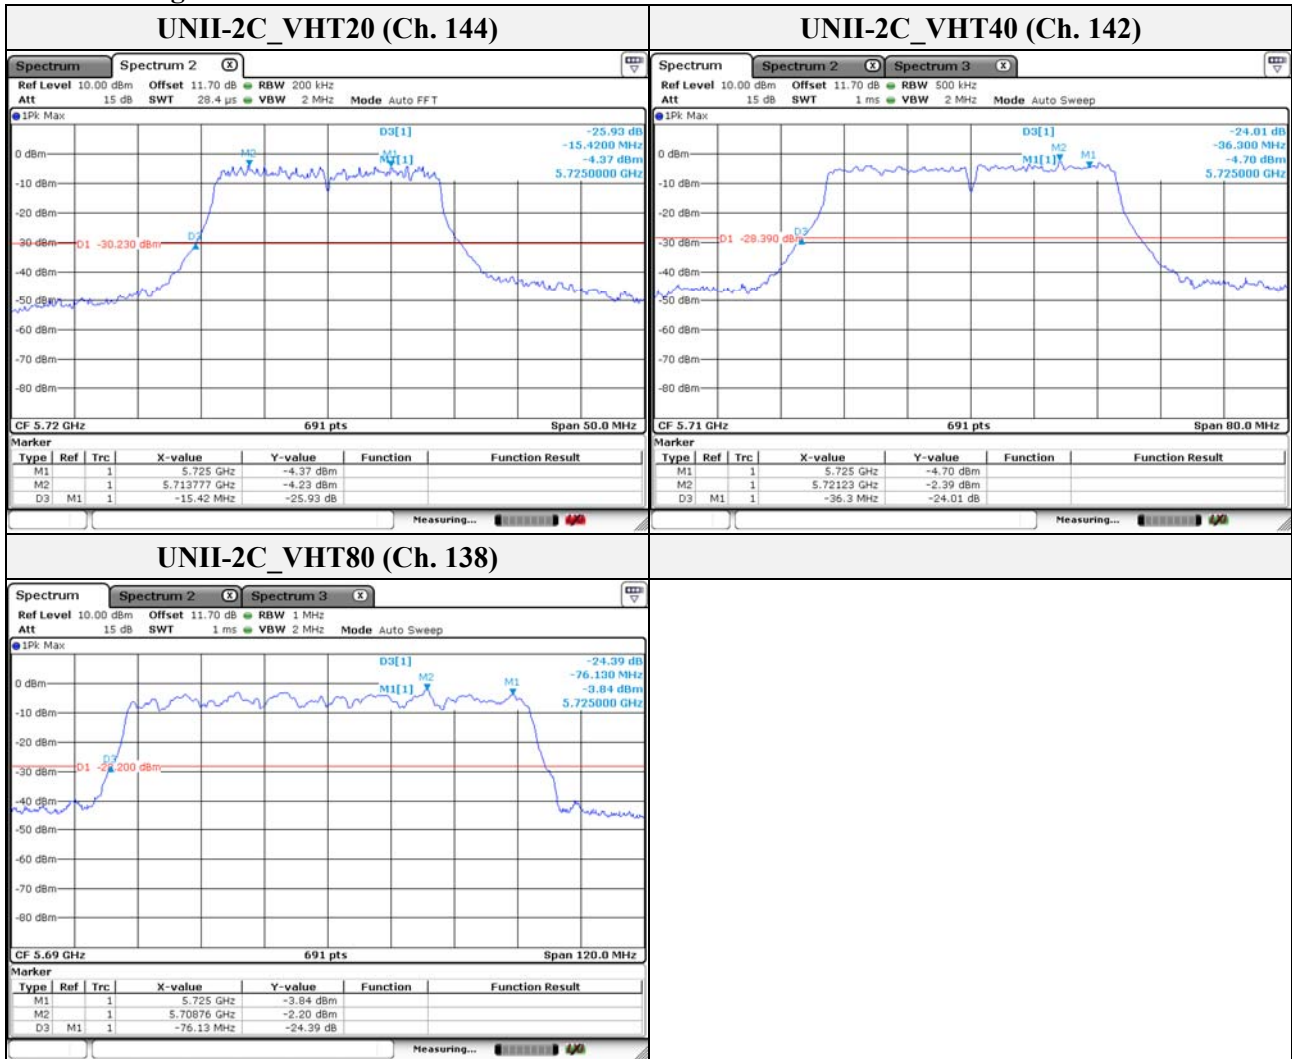


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr




**99% bandwidth**

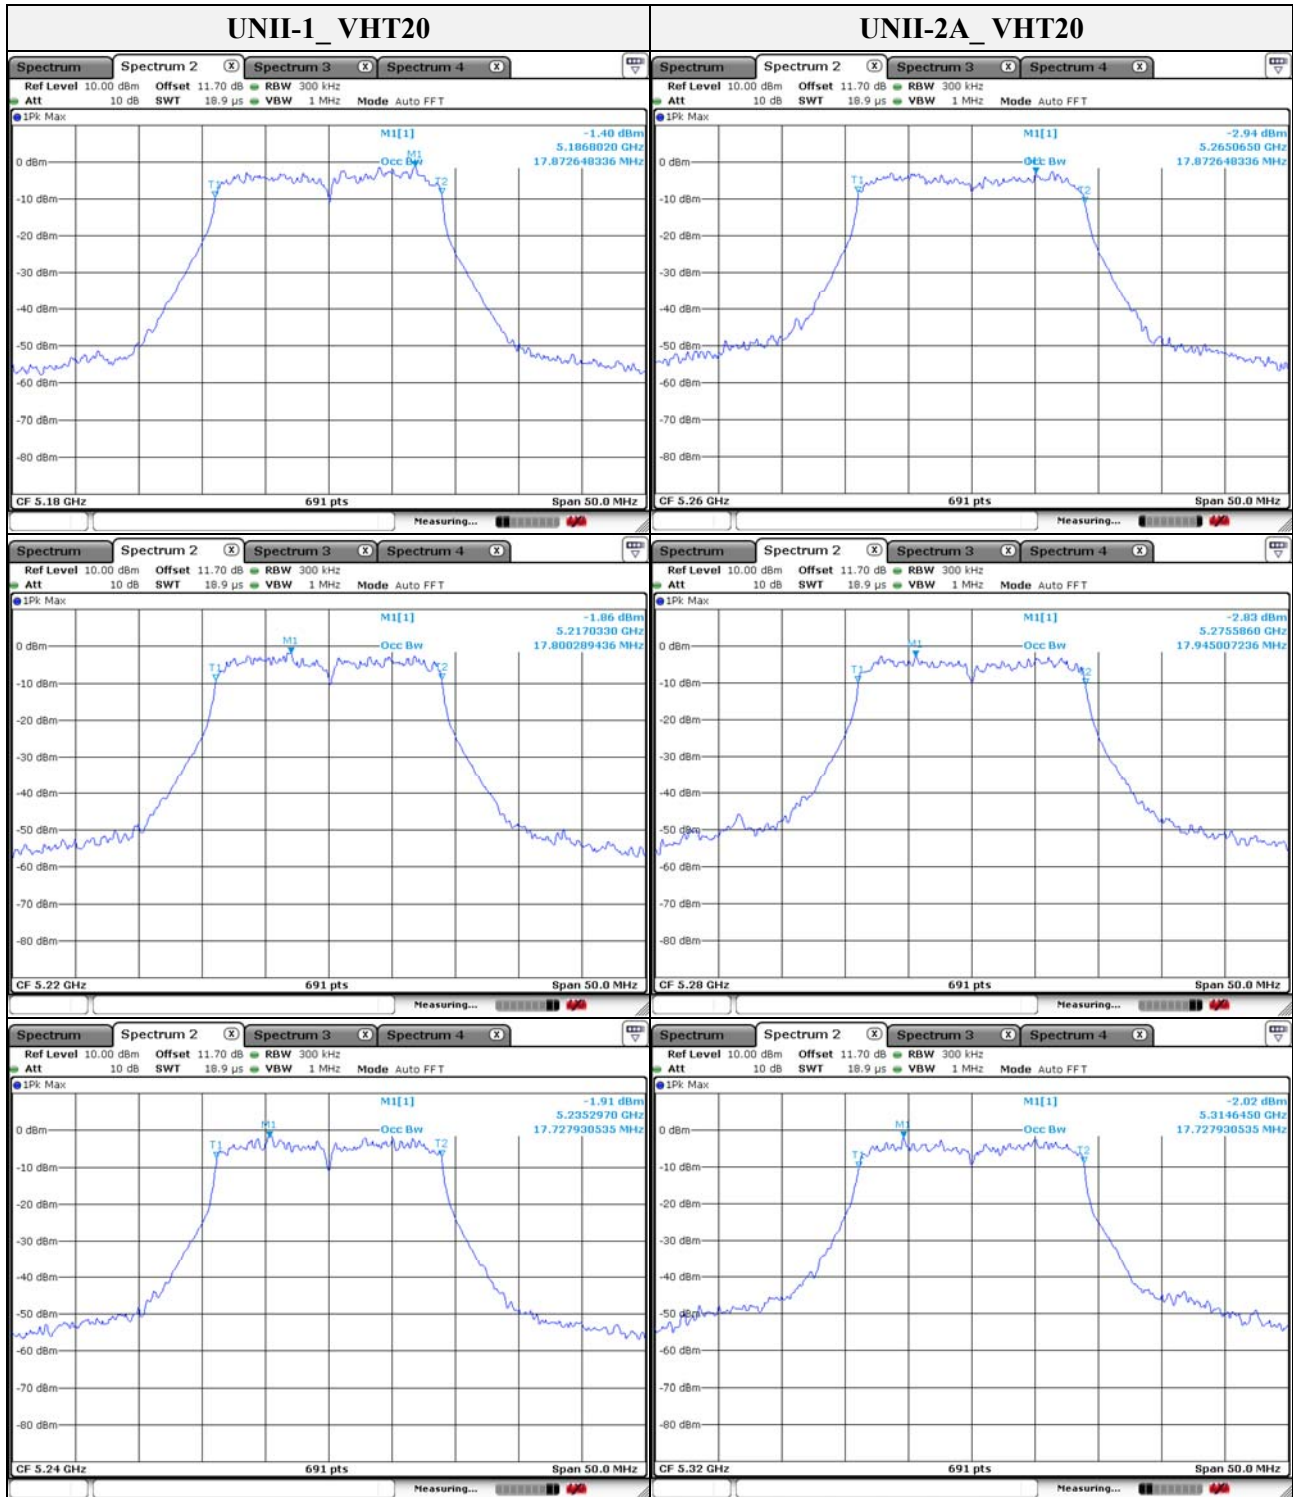


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

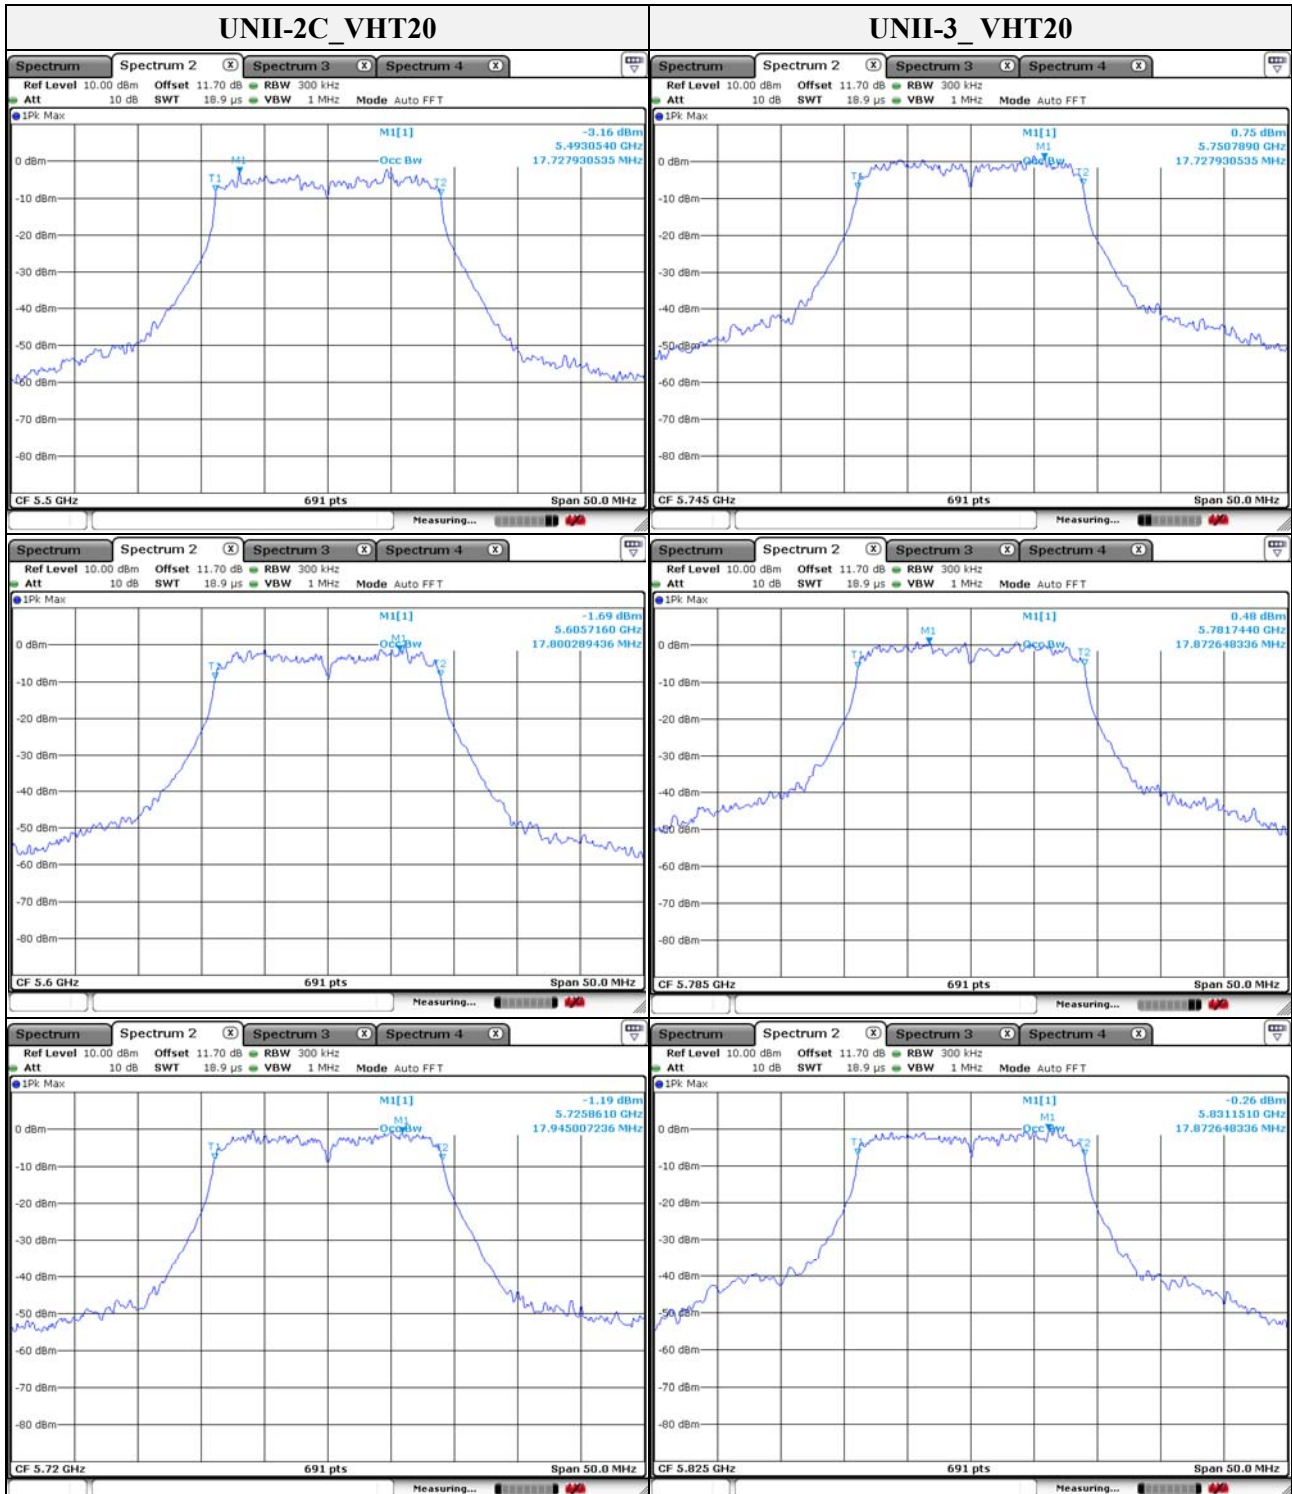


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

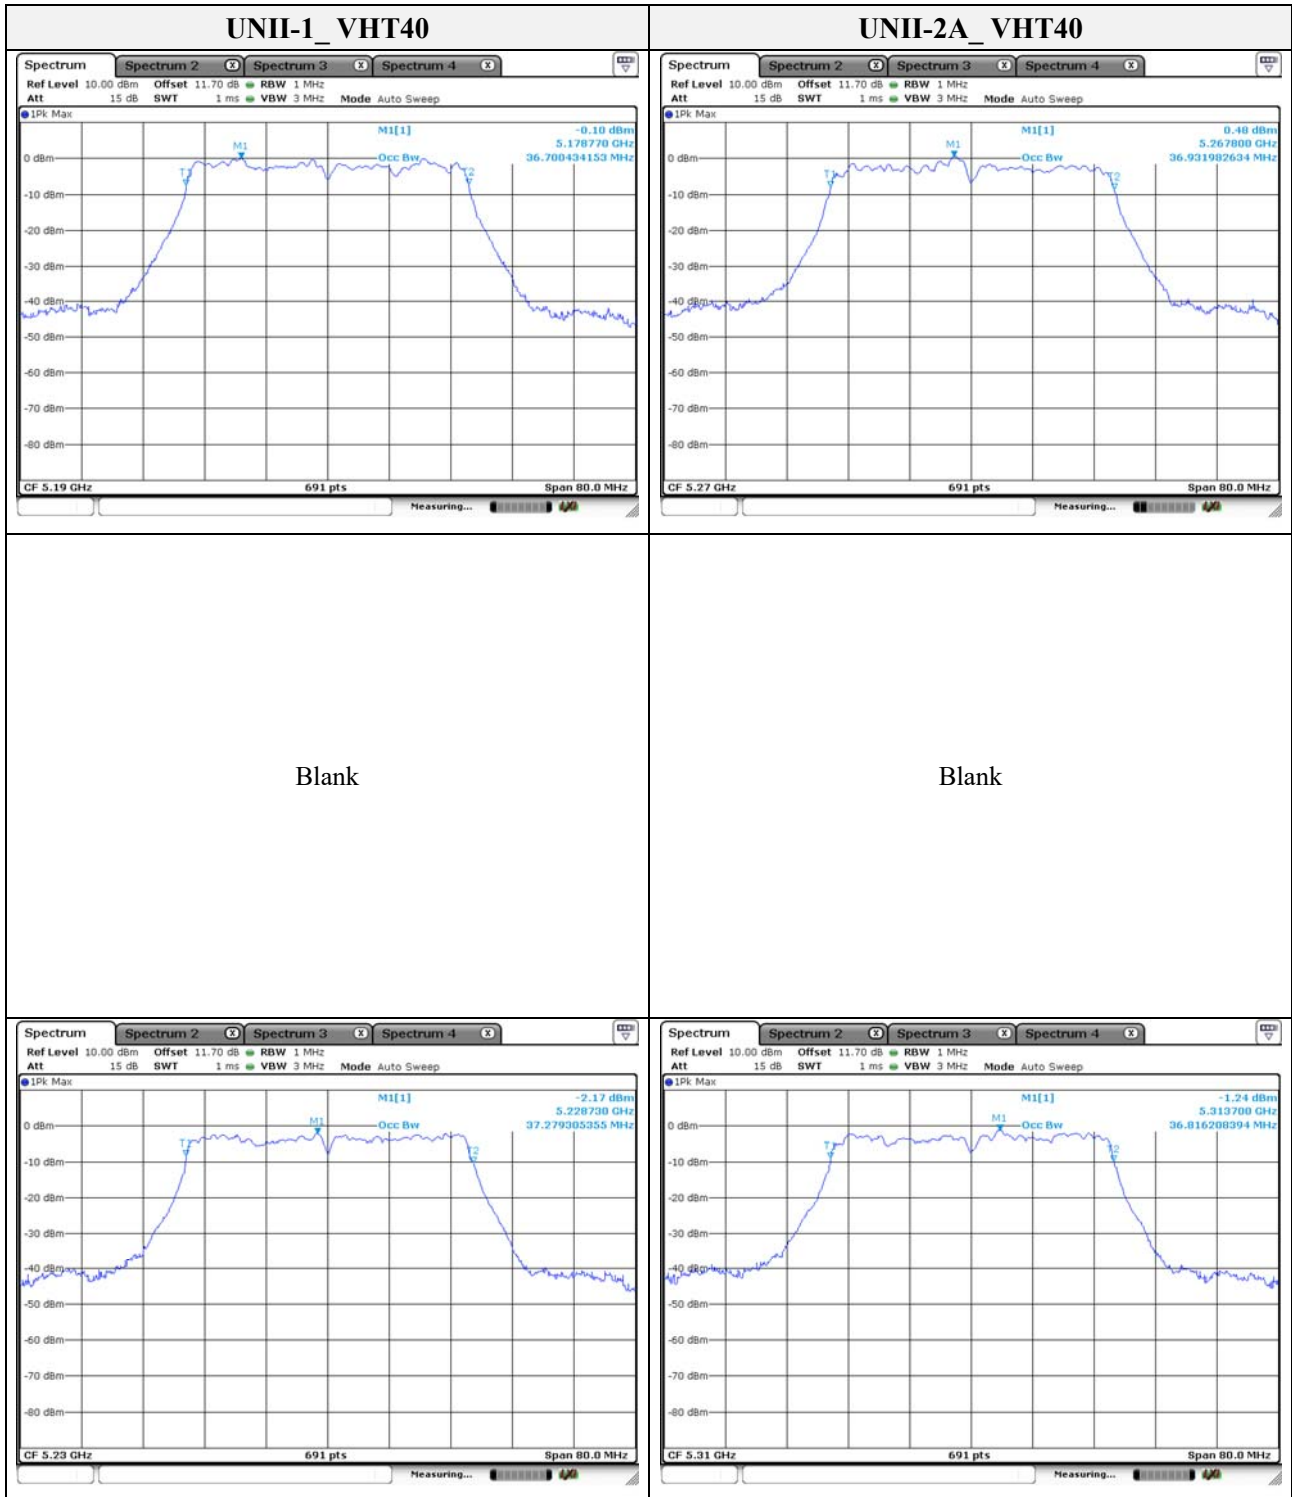

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

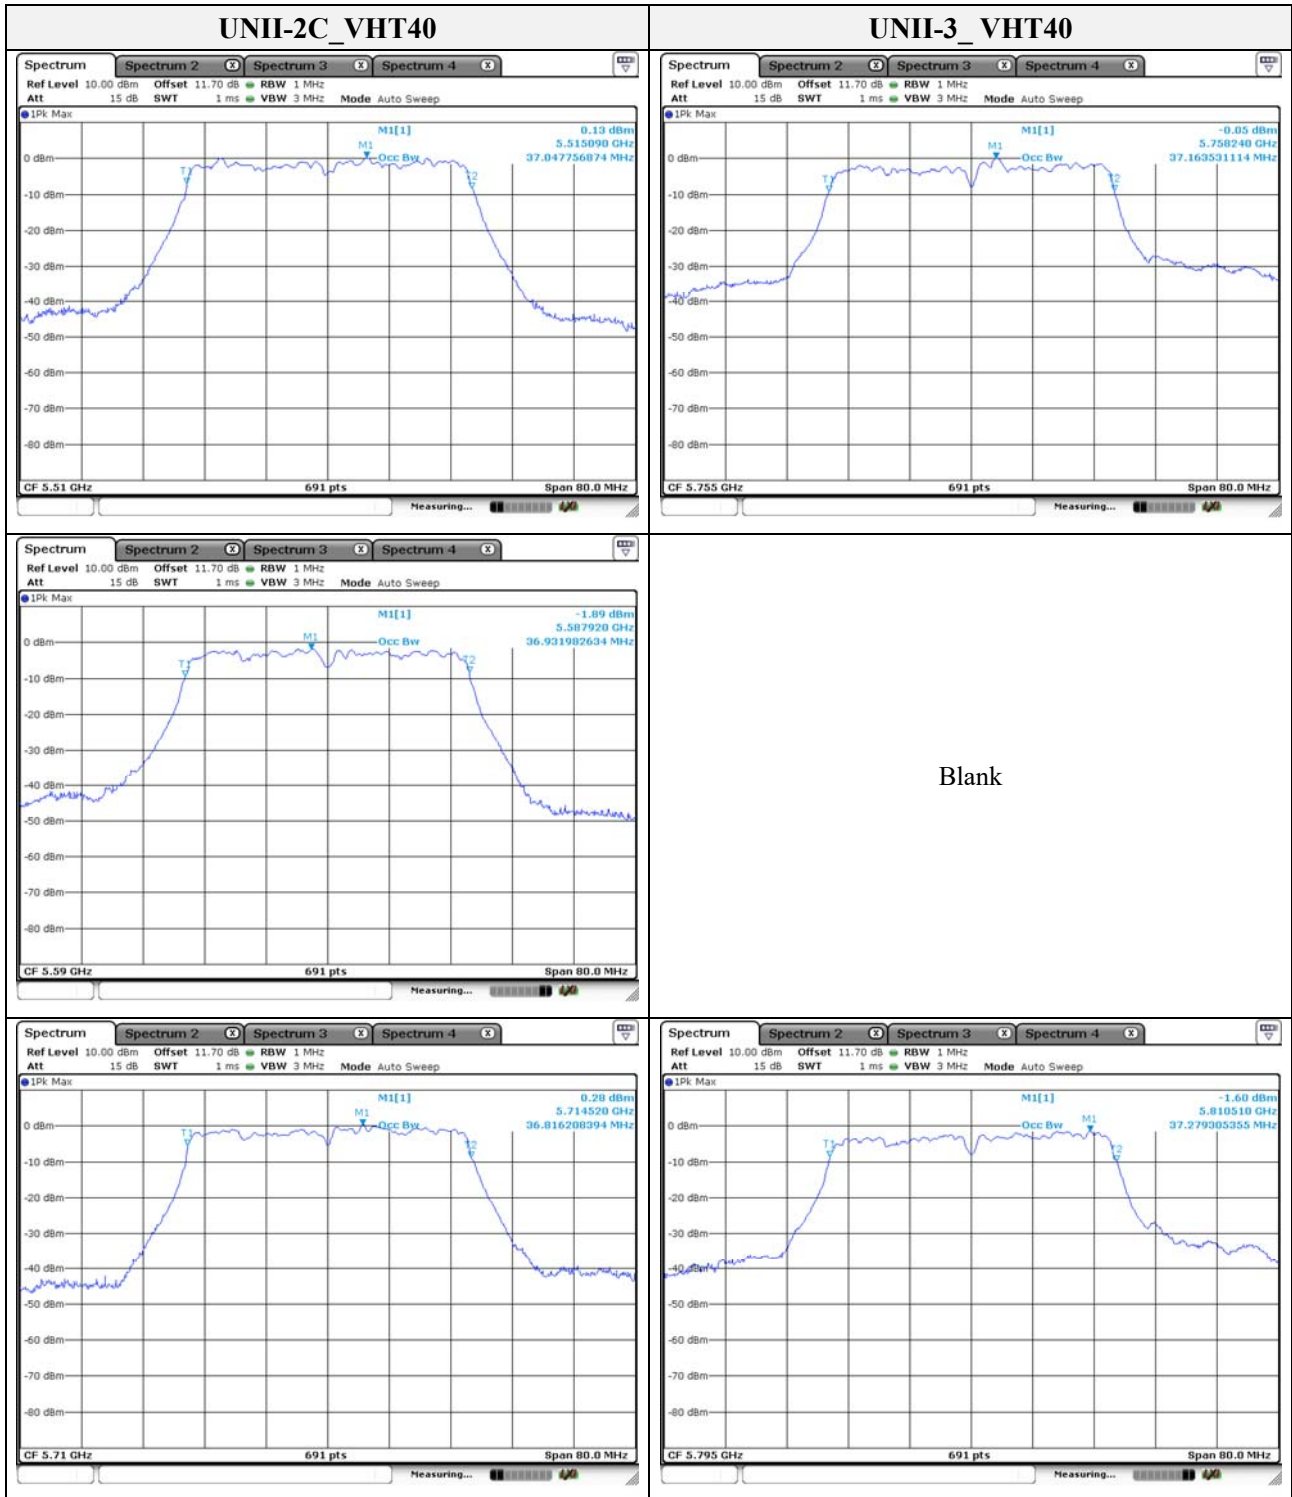

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

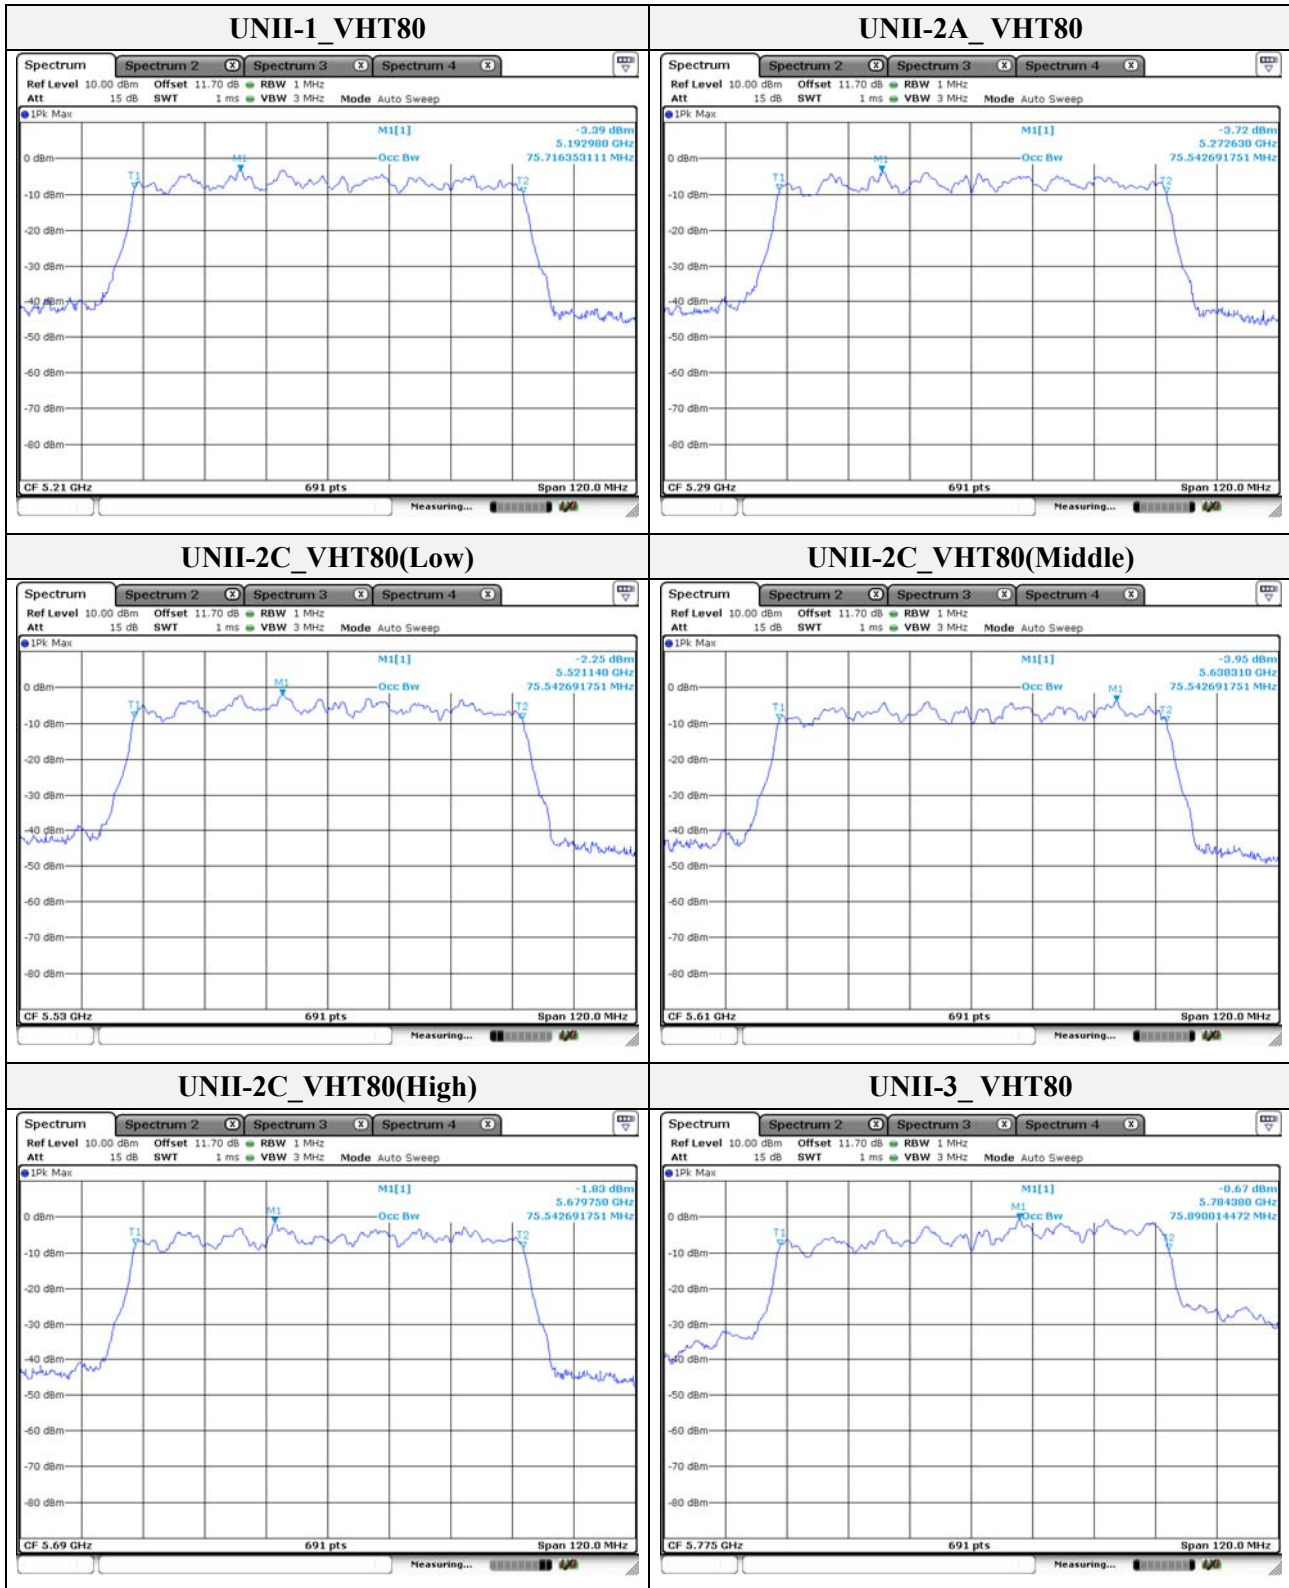


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

### 3.2. 6 dB bandwidth

#### Test procedure

KDB 789033 D02 v02r01– Section C.2

#### Test setup



#### Section C.2

1. Set RBW = 100 kHz
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = peak.
4. Sweep = auto couple.
5. Allow the trace to stabilize
6. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

According to RSS-247 6.1 (1), equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.



**KES Co., Ltd.**


3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-19T0015  
Page (23) of (110)

**Test results**

| Band                               | Frequency(MHz) | Mode  | 6 dB bandwidth(MHz) |
|------------------------------------|----------------|-------|---------------------|
| UNII-3                             | 5 745          | VHT20 | 17.366              |
|                                    | 5 785          |       | 17.656              |
|                                    | 5 825          |       | 17.583              |
|                                    | 5 755          | VHT40 | 36.010              |
|                                    | 5 795          |       | 35.720              |
|                                    | 5 775          | VHT80 | 74.120              |
| UNII-3<br>(Band-crossing channels) | 5 720          | VHT20 | 3.799               |
|                                    | 5 710          | VHT40 | 3.100               |
|                                    | 5 690          | VHT80 | 3.280               |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

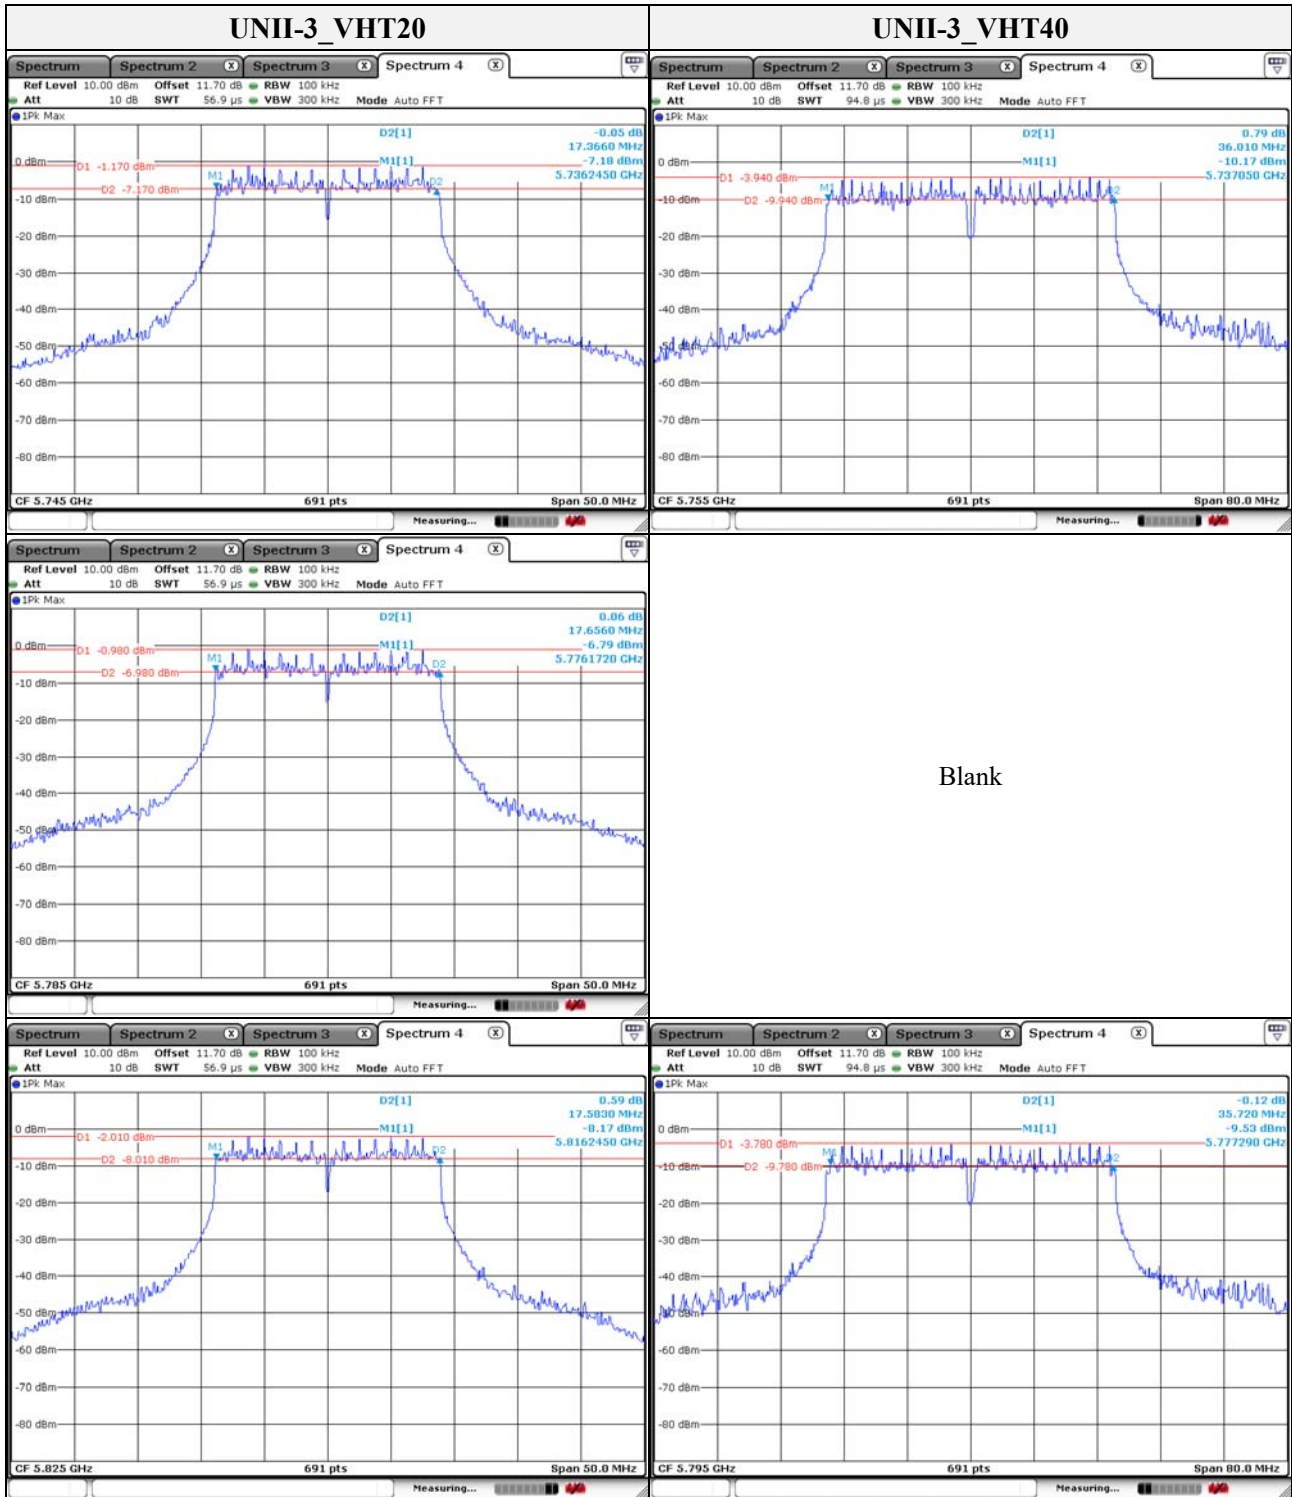

Blank

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr






**KES Co., Ltd.**


3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-19T0015  
Page (25) of (110)

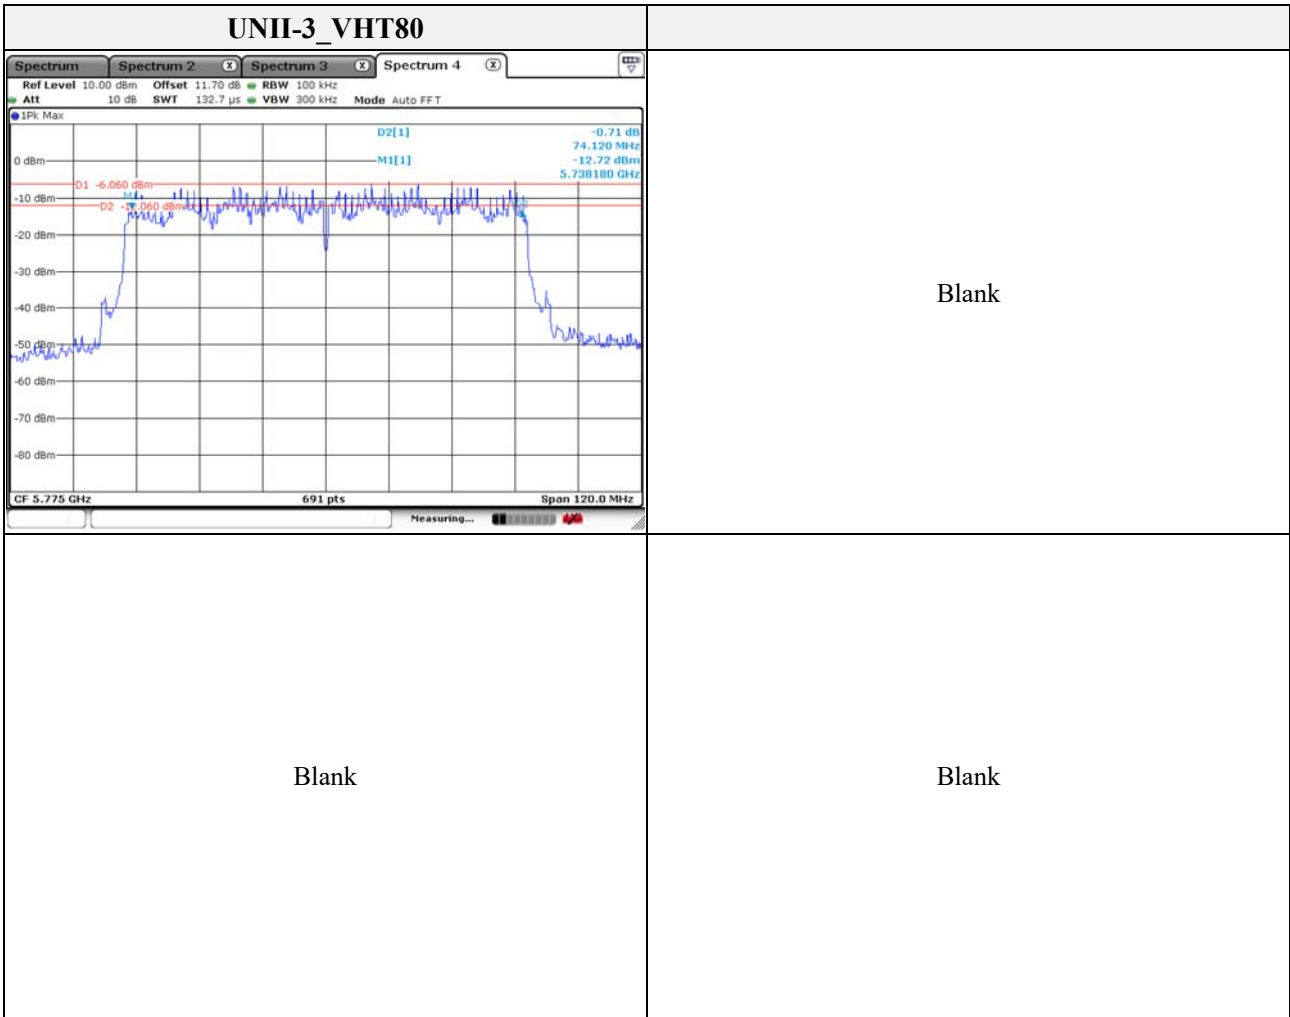

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

**Band-crossing channels**

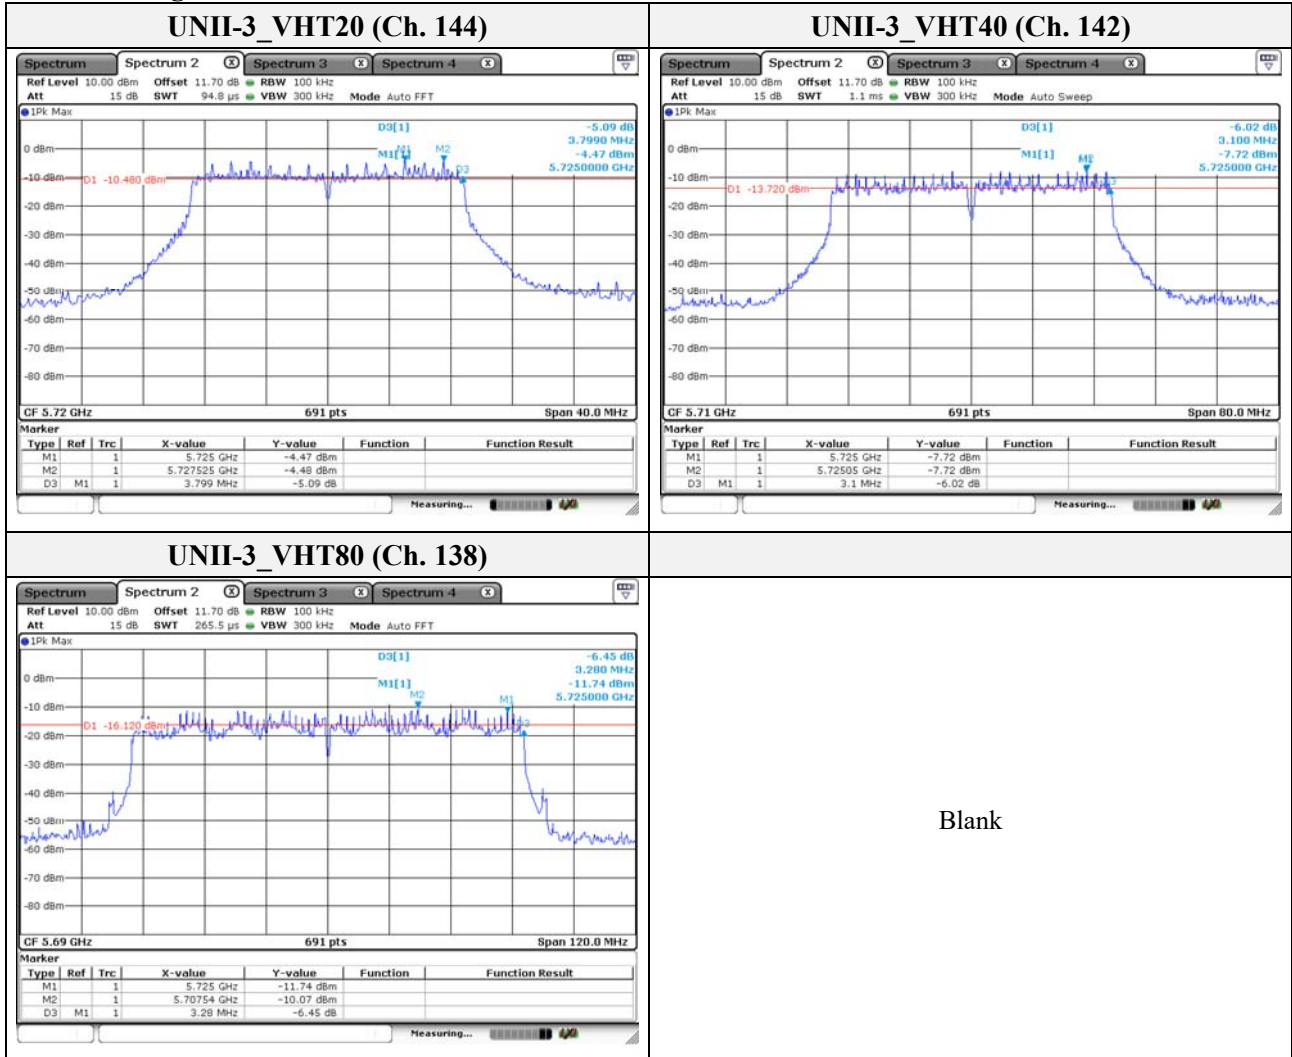

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr


### 3.3. Maximum conducted output power

#### Test procedure

KDB 789033 D02 v02r01– Section E.3.a) or b)

Used test method is Section E.3.b)

#### Test setup

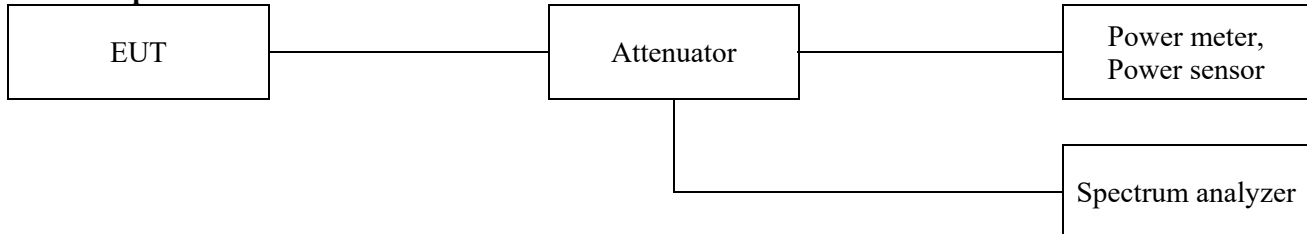

#### Section E.3.a)

##### Method PM (Measurement using an RF average power meter):

- i. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.
  - The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
  - At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
  - The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- ii. If the transmitter does not transmit continuously, measure the duty cycle,  $x$ , of the transmitter output signal as described in section II.B.
- iii. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- iv. Adjust the measurement in dBm by adding  $10 \log (1/x)$  where  $x$  is the duty cycle (e.g.,  $10 \log (1/0.25)$  if the duty cycle is 25 %).

#### Section E.3.b)

##### Method PM-G (Measurement using a gated RF average power meter):

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

**Limit  
 FCC**

| Band    | EUT Category                        | Limit                      |
|---------|-------------------------------------|----------------------------|
| UNII-1  | Outdoor access point                | 1 W (30 dBm)               |
|         | Indoor access point                 |                            |
|         | Fixed point-to-point access point   |                            |
|         | ✓ Mobile and portable client device | 250 mW(24 dBm)             |
| UNII-2A | ✓                                   | 250 mW or 11 dBm + 10logB* |
| UNII-2C | ✓                                   | 250 mW or 11 dBm + 10logB* |
| UNII-3  | ✓                                   | 1 W (30 dBm)               |

**Note.**

1. FCC Limit B is the 26 dB emission bandwidth.

**Test results**

| Band    | Frequency (MHz) | Mode  | Detector mode | Output power (dBm) | Limit(dBm) |
|---------|-----------------|-------|---------------|--------------------|------------|
|         |                 |       |               |                    | FCC        |
| UNII-1  | 5 180           | VHT20 | AV            | 8.79               | 24.00      |
|         | 5 220           |       | AV            | 8.07               |            |
|         | 5 240           |       | AV            | 8.41               |            |
| UNII-2A | 5 260           |       | AV            | 7.68               | 24.00      |
|         | 5 280           |       | AV            | 7.09               |            |
|         | 5 320           |       | AV            | 7.31               |            |
| UNII-2C | 5 500           |       | AV            | 6.04               | 24.00      |
|         | 5 600           |       | AV            | 7.22               |            |
|         | 5 720           |       | AV            | 7.57               |            |
| UNII-3  | 5 745           |       | AV            | 9.22               | 30.00      |
|         | 5 785           |       | AV            | 10.08              |            |
|         | 5 825           |       | AV            | 11.94              |            |

| Band    | Frequency (MHz) | Mode  | Detector mode | Output power (dBm) | Limit(dBm) |
|---------|-----------------|-------|---------------|--------------------|------------|
|         |                 |       |               |                    | FCC        |
| UNII-1  | 5 190           | VHT40 | AV            | 7.08               | 24.00      |
|         | 5 230           |       | AV            | 6.66               |            |
| UNII-2A | 5 270           |       | AV            | 6.01               | 24.00      |
|         | 5 310           |       | AV            | 5.55               |            |
| UNII-2C | 5 510           |       | AV            | 5.80               | 24.00      |
|         | 5 590           |       | AV            | 5.98               |            |
|         | 5 710           |       | AV            | 7.28               |            |
| UNII-3  | 5 755           |       | AV            | 7.81               | 30.00      |
|         | 5 795           |       | AV            | 8.33               |            |

| Band    | Frequency (MHz) | Mode  | Detector mode | Output power (dBm) | Limit(dBm) |
|---------|-----------------|-------|---------------|--------------------|------------|
|         |                 |       |               |                    | FCC        |
| UNII-1  | 5 210           | VHT80 | AV            | 7.01               | 24.00      |
| UNII-2A | 5 290           |       | AV            | 5.67               | 24.00      |
| UNII-2C | 5 530           |       | AV            | 5.02               | 24.00      |
|         | 5 610           |       | AV            | 6.03               |            |
|         | 5 690           |       | AV            | 7.00               |            |
| UNII-3  | 5 775           |       | AV            | 8.10               | 30.00      |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr


Test report No.:  
KES-RF-19T0015  
Page (30) of (110)

**Band-crossing channels**

| Band    | Frequency (MHz) | Mode  | Detector mode | Output power (dBm) | Limit(dBm) |
|---------|-----------------|-------|---------------|--------------------|------------|
|         |                 |       |               |                    | FCC        |
| UNII-2C | 5 720           | VHT20 | AV            | 3.14               | 22.90      |
|         | 5 710           | VHT40 | AV            | 2.18               | 24.00      |
|         | 5 690           | VHT80 | AV            | 0.09               | 24.00      |
| UNII-3  | 5 720           | VHT20 | AV            | -2.35              | 30.00      |
|         | 5 710           | VHT40 | AV            | -8.16              |            |
|         | 5 690           | VHT80 | AV            | -11.87             |            |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

### Band-crossing channels

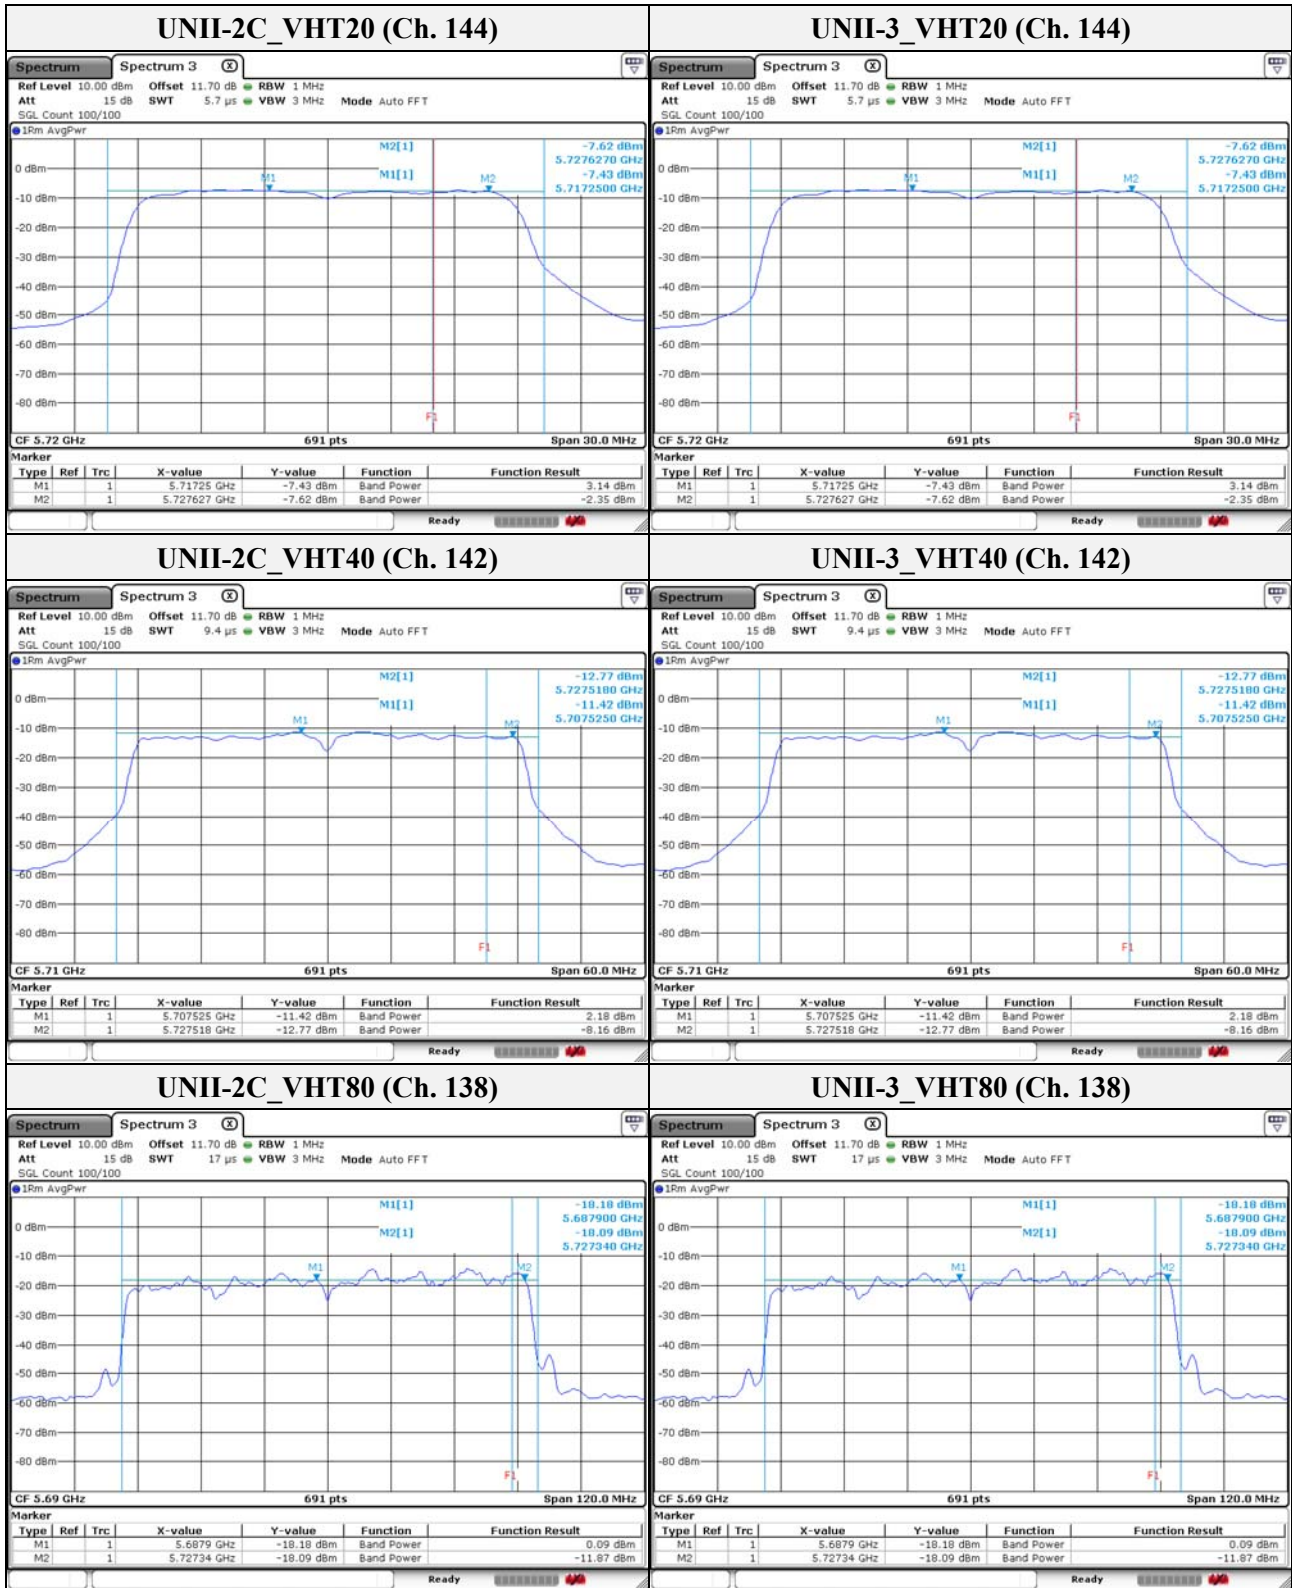


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

### 3.4. Power spectral density

#### Test procedure

KDB 789033 D02 v02r01 – Section F

#### Test setup



#### Section F

1. Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, “Compute power...” (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
2. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
3. Make the following adjustments to the peak value of the spectrum, if applicable:
  - a) If Method SA-2 or SA-2 Alternative was used, add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the peak of the spectrum.
  - b) If Method SA-3 Alternative was used and the linear mode was used in step II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
4. The result is the Maximum PSD over 1 MHz reference bandwidth.
5. For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:
  - a) Set  $RBW \geq 1/T$ , where  $T$  is defined in section II.B.1.a)
  - b) Set  $VBW \geq 3 RBW$ .
  - c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10 \log(500 \text{ kHz}/RBW)$  to the measured result, whereas  $RBW (< 500 \text{ kHz})$  is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
  - d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10 \log(1 \text{ MHz}/RBW)$  to the measured result, whereas  $RBW (< 1 \text{ MHz})$  is the reduced resolution bandwidth of spectrum analyzer set during measurement.
  - e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

#### Note.

As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since  $RBW=100 \text{ kHz}$  is available on nearly all spectrum analyzers.



**Limit  
 FCC**

| Band    | EUT Category                        | Limit          |
|---------|-------------------------------------|----------------|
| UNII-1  | Outdoor access point                | 17 dBm/MHz     |
|         | Indoor access point                 |                |
|         | Fixed point-to-point access point   |                |
|         | ✓ Mobile and portable client device | 11 dBm/MHz     |
| UNII-2A | ✓                                   | 11 dBm/MHz     |
| UNII-2C | ✓                                   | 11 dBm/MHz     |
| UNII-3  | ✓                                   | 30 dBm/500 kHz |

**Note.**

1. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceed 6 dBi.

**Test results**

| Band   | Frequency (MHz) | Mode  | PSD (dBm/MHz) | RBWF Note1 | DCF Note2 | Sum Note3 | Limit(dBm/MHz) |
|--------|-----------------|-------|---------------|------------|-----------|-----------|----------------|
|        |                 |       |               |            |           |           | FCC            |
| UNII-1 | 5 180           | VHT20 | -6.40         | -          | 1.62      | -4.78     | 11.00          |
|        | 5 220           |       | -6.35         |            |           | -4.73     |                |
|        | 5 240           |       | -6.05         |            |           | -4.43     |                |
|        | 5 190           | VHT40 | -8.91         |            | 3.15      | -5.76     |                |
|        | 5 230           |       | -9.52         |            |           | -6.37     |                |
|        | 5 210           | VHT80 | -11.07        |            | 3.43      | -7.64     |                |

| Band    | Frequency (MHz) | Mode  | PSD (dBm/MHz) | RBWF Note1 | DCF Note2 | Sum Note3 | Limit(dBm/MHz) |
|---------|-----------------|-------|---------------|------------|-----------|-----------|----------------|
|         |                 |       |               |            |           |           | FCC            |
| UNII-2A | 5 260           | VHT20 | -6.74         | -          | 0.93      | -5.81     | 11.00          |
|         | 5 280           |       | -6.59         |            |           | -5.66     |                |
|         | 5 320           |       | -5.87         |            |           | -4.94     |                |
|         | 5 270           | VHT40 | -9.93         |            | 3.42      | -6.51     |                |
|         | 5 310           |       | -10.58        |            |           | -7.16     |                |
|         | 5 290           | VHT80 | -14.07        |            | 4.97      | -9.10     |                |

| Band    | Frequency (MHz) | Mode  | PSD (dBm/MHz) | RBWF Note1 | DCF Note2 | Sum Note3 | Limit(dBm/MHz) |
|---------|-----------------|-------|---------------|------------|-----------|-----------|----------------|
|         |                 |       |               |            |           |           | FCC            |
| UNII-2C | 5 500           | VHT20 | -6.31         | -          | 2.24      | -4.07     | 11.00          |
|         | 5 600           |       | -5.14         |            |           | -2.90     |                |
|         | 5 720           |       | -4.30         |            |           | -2.06     |                |
|         | 5 500           | VHT40 | -12.08        |            | 3.43      | -8.65     |                |
|         | 5 600           |       | -9.02         |            |           | -5.59     |                |
|         | 5 720           |       | -8.23         |            |           | -4.80     |                |
|         | 5 530           | VHT80 | -12.95        |            | 3.70      | -9.25     |                |
|         | 5 610           |       | -12.62        |            |           | -8.92     |                |
| 5 690   | -11.61          |       | -7.91         |            |           |           |                |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

| Band   | Frequency (MHz) | Mode  | PSD (dBm/500kHz) | RBWF Note1 | DCF Note2 | Sum Note3 | Limit(dBm/MHz) |
|--------|-----------------|-------|------------------|------------|-----------|-----------|----------------|
|        |                 |       |                  |            |           |           | FCC            |
| UNII-3 | 5 745           | VHT20 | -5.21            | -          | 2.29      | -2.92     | 30.00          |
|        | 5 785           |       | -5.67            |            |           | -3.38     |                |
|        | 5 825           |       | -6.92            |            |           | -4.63     |                |
|        | 5 755           | VHT40 | -9.44            |            | 2.76      | -6.68     |                |
|        | 5 795           |       | -9.27            |            |           | -6.51     |                |
|        | 5 775           | VHT80 | -11.95           |            | 3.58      | -8.37     |                |


**Band-crossing channels**

| Band    | Frequency (MHz) | Mode  | PSD (dBm/MHz) | RBWF Note1 | DCF Note2 | Sum Note3 | Limit(dBm/MHz) |
|---------|-----------------|-------|---------------|------------|-----------|-----------|----------------|
|         |                 |       |               |            |           |           | FCC            |
| UNII-2C | 5 720           | VHT20 | -7.50         | -          | 2.24      | -5.26     | 11.00          |
|         | 5 710           | VHT40 | -11.23        | -          | 3.43      | -7.80     |                |
|         | 5 690           | VHT80 | -14.76        | -          | 3.70      | -11.06    |                |


| Band   | Frequency (MHz) | Mode  | PSD (dBm/500kHz) | RBWF Note1 | DCF Note2 | Sum Note3 | Limit (dBm/500kHz) |
|--------|-----------------|-------|------------------|------------|-----------|-----------|--------------------|
|        |                 |       |                  |            |           |           | FCC                |
| UNII-3 | 5 720           | VHT20 | -10.15           | -          | 2.29      | -7.86     | 30.00              |
|        | 5 710           | VHT40 | -14.79           | -          | 2.76      | -12.03    |                    |
|        | 5 690           | VHT80 | -19.27           | -          | 3.58      | -15.69    |                    |

**Note.**


1. UNII-1 = 10log(1 MHz/1 MHz)  
 UNII-2A = 10log(1 MHz/1 MHz)  
 UNII-2C = 10log(1 MHz/1 MHz)  
 UNII-3 = 10log(500 kHz /500 kHz)
2. Refer to the page 52 on this report.
3. Sum(dBm) = PSD(dBm) + RBWF + Duty correction factor (dB)

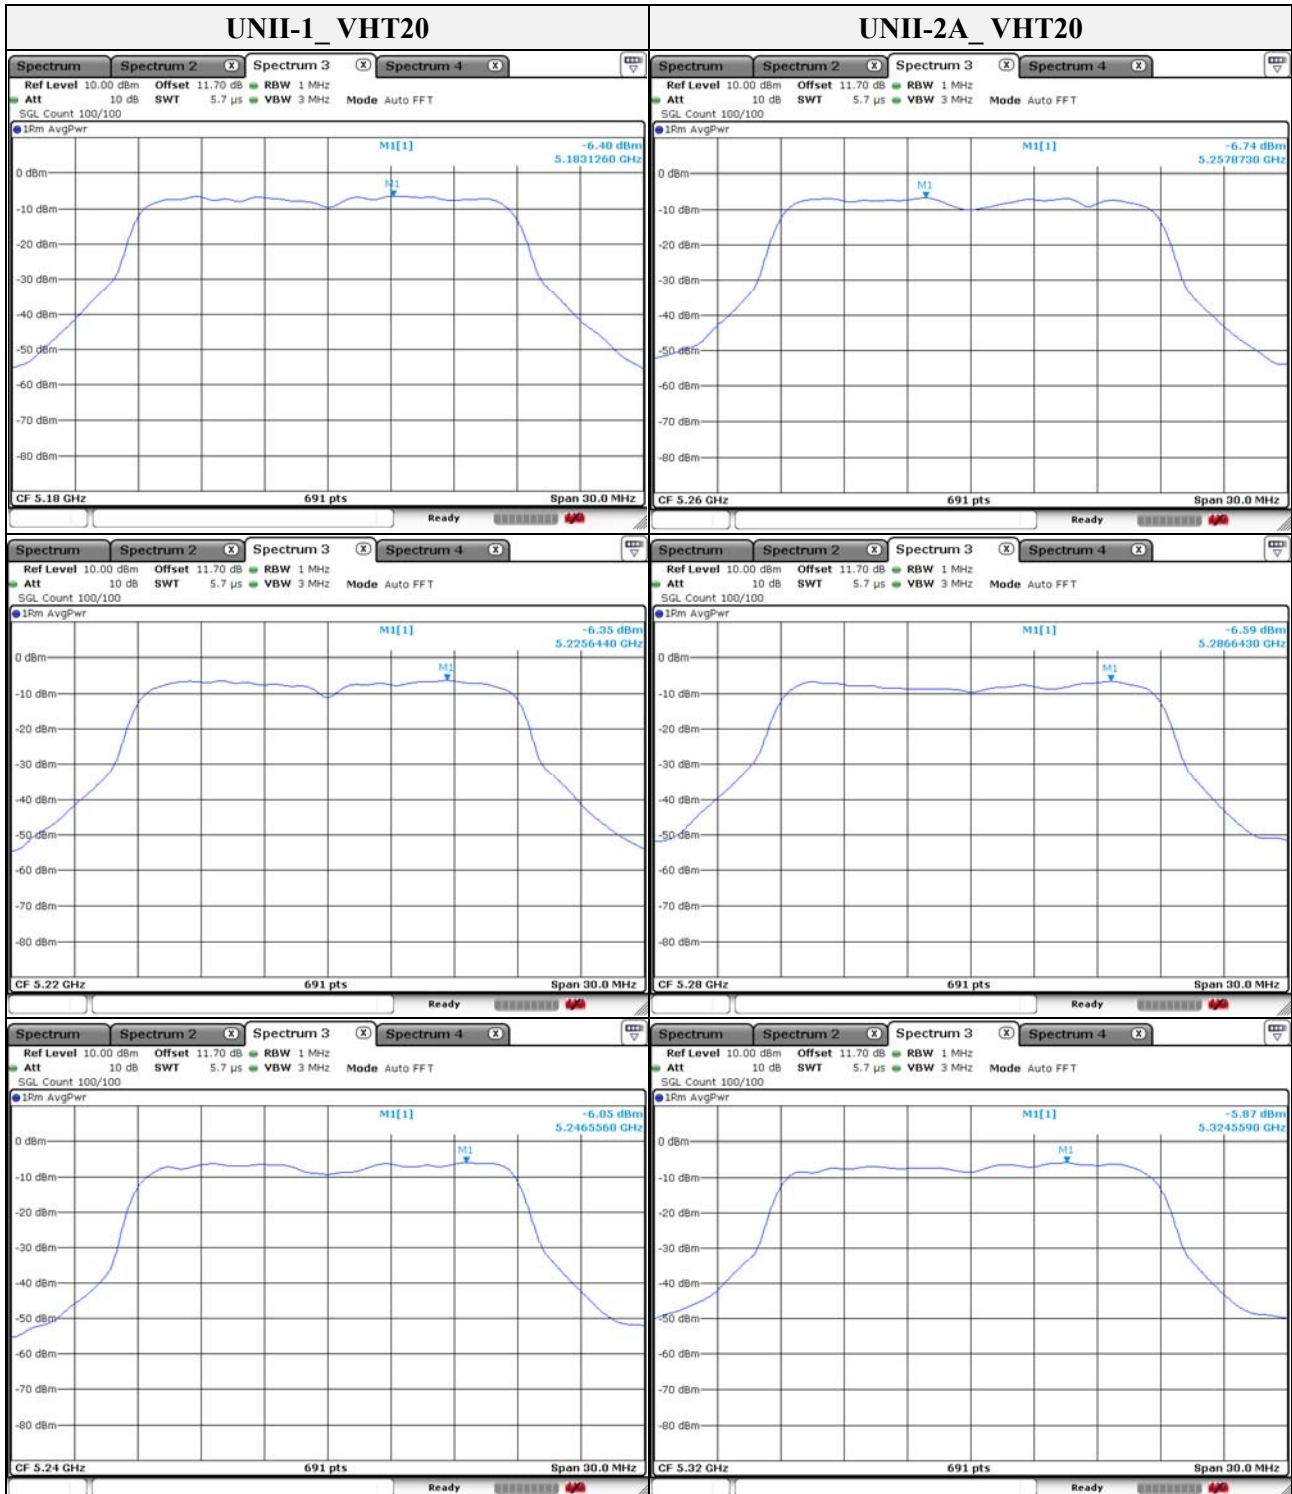


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

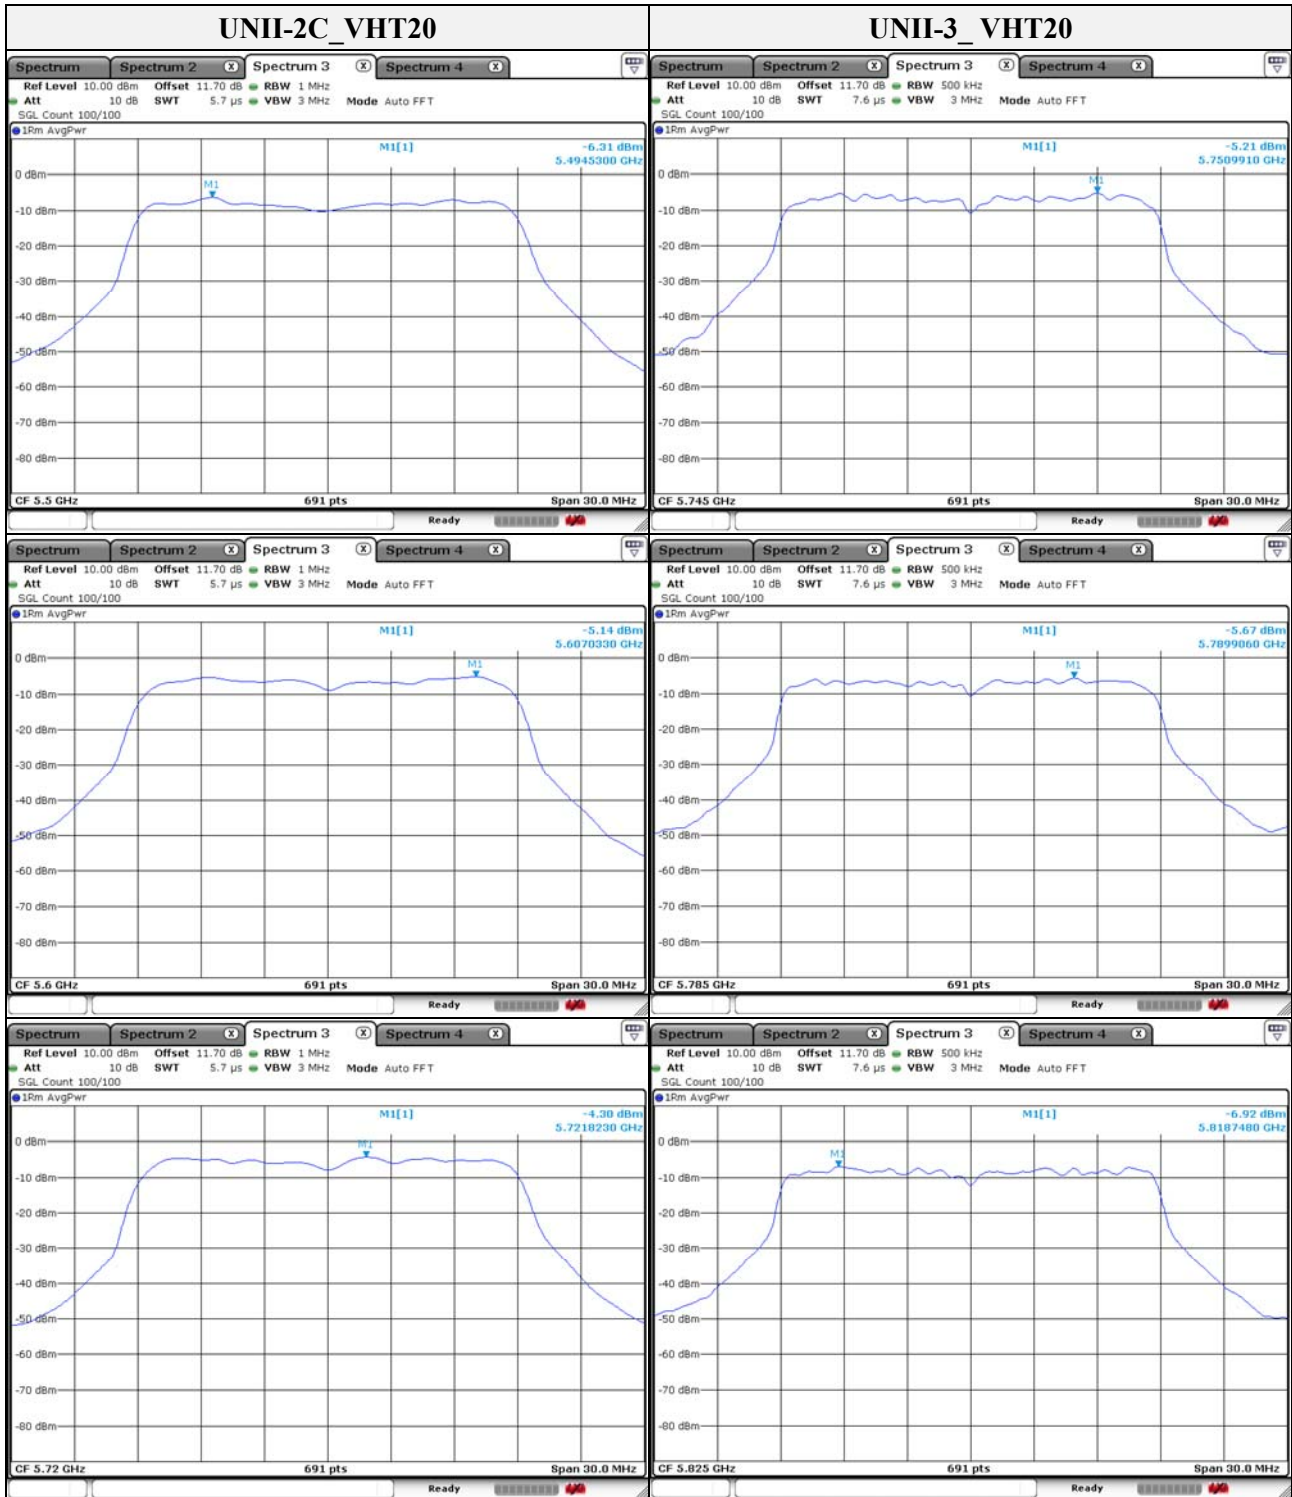


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

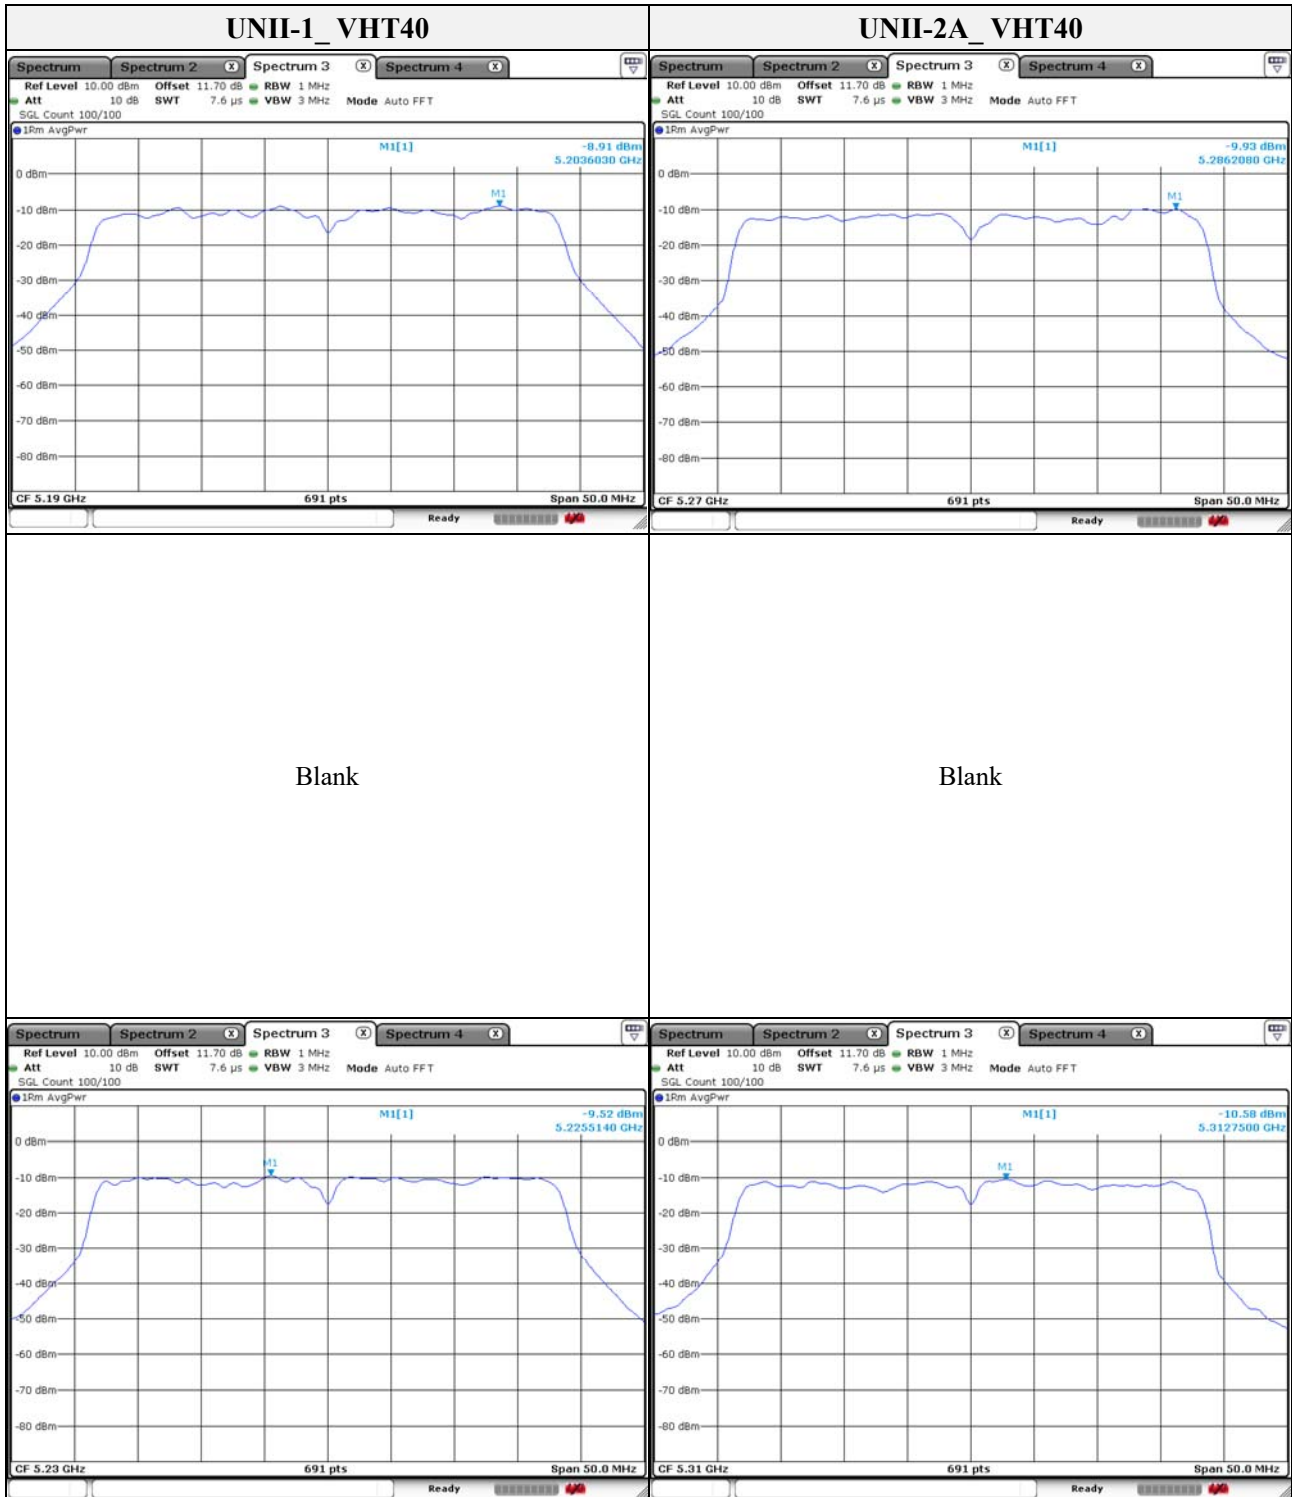

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

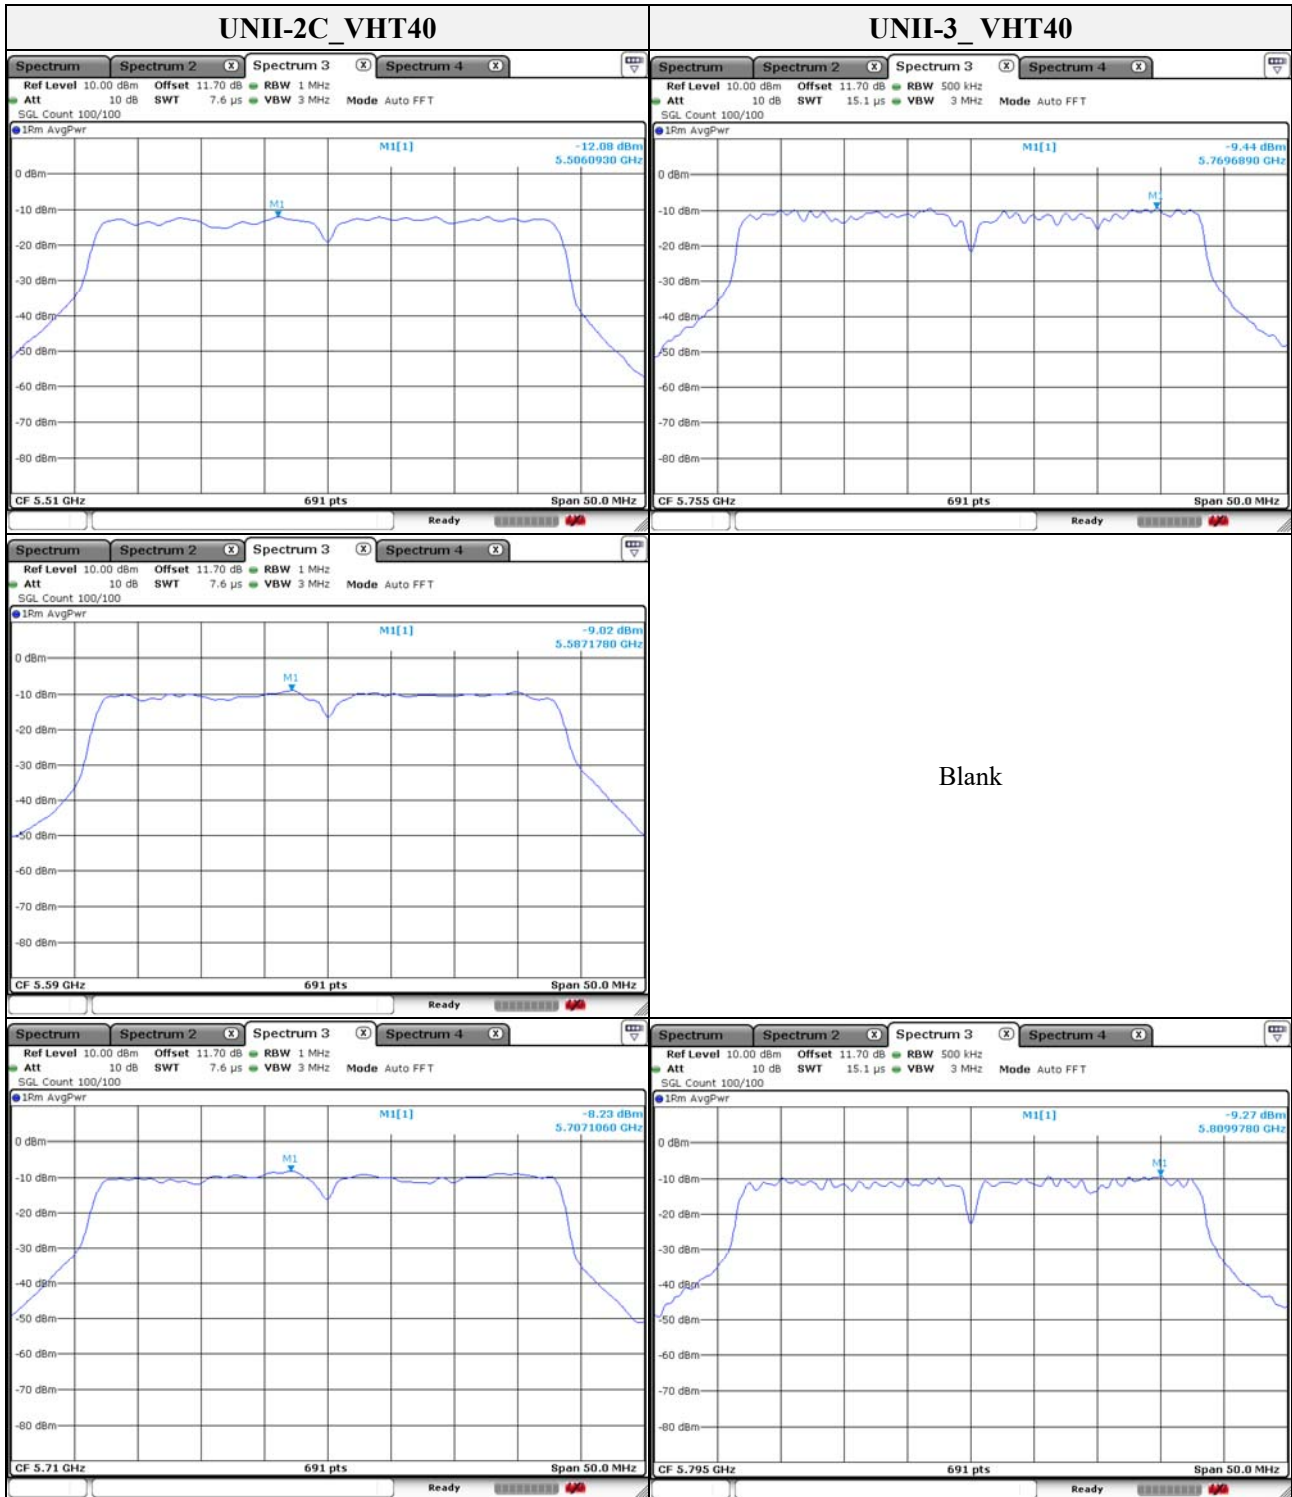


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

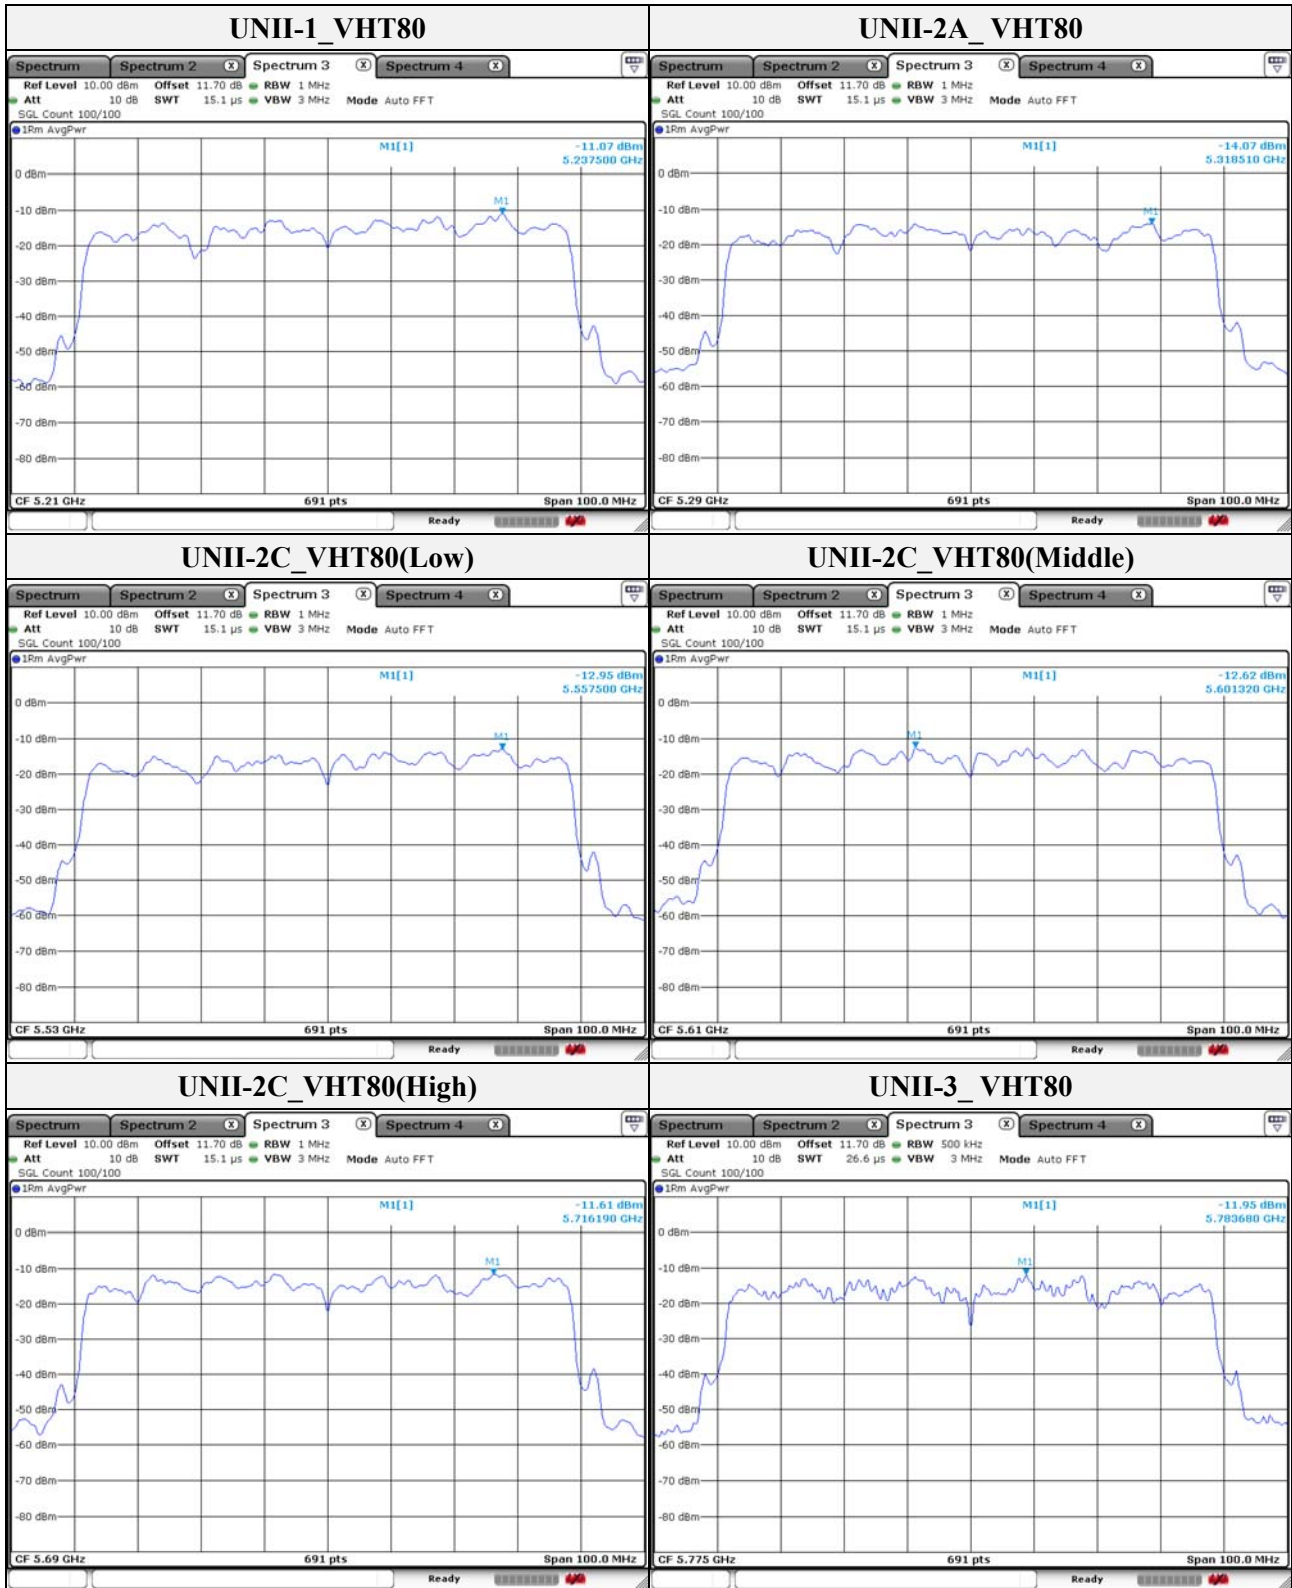

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



**Band-crossing channels**

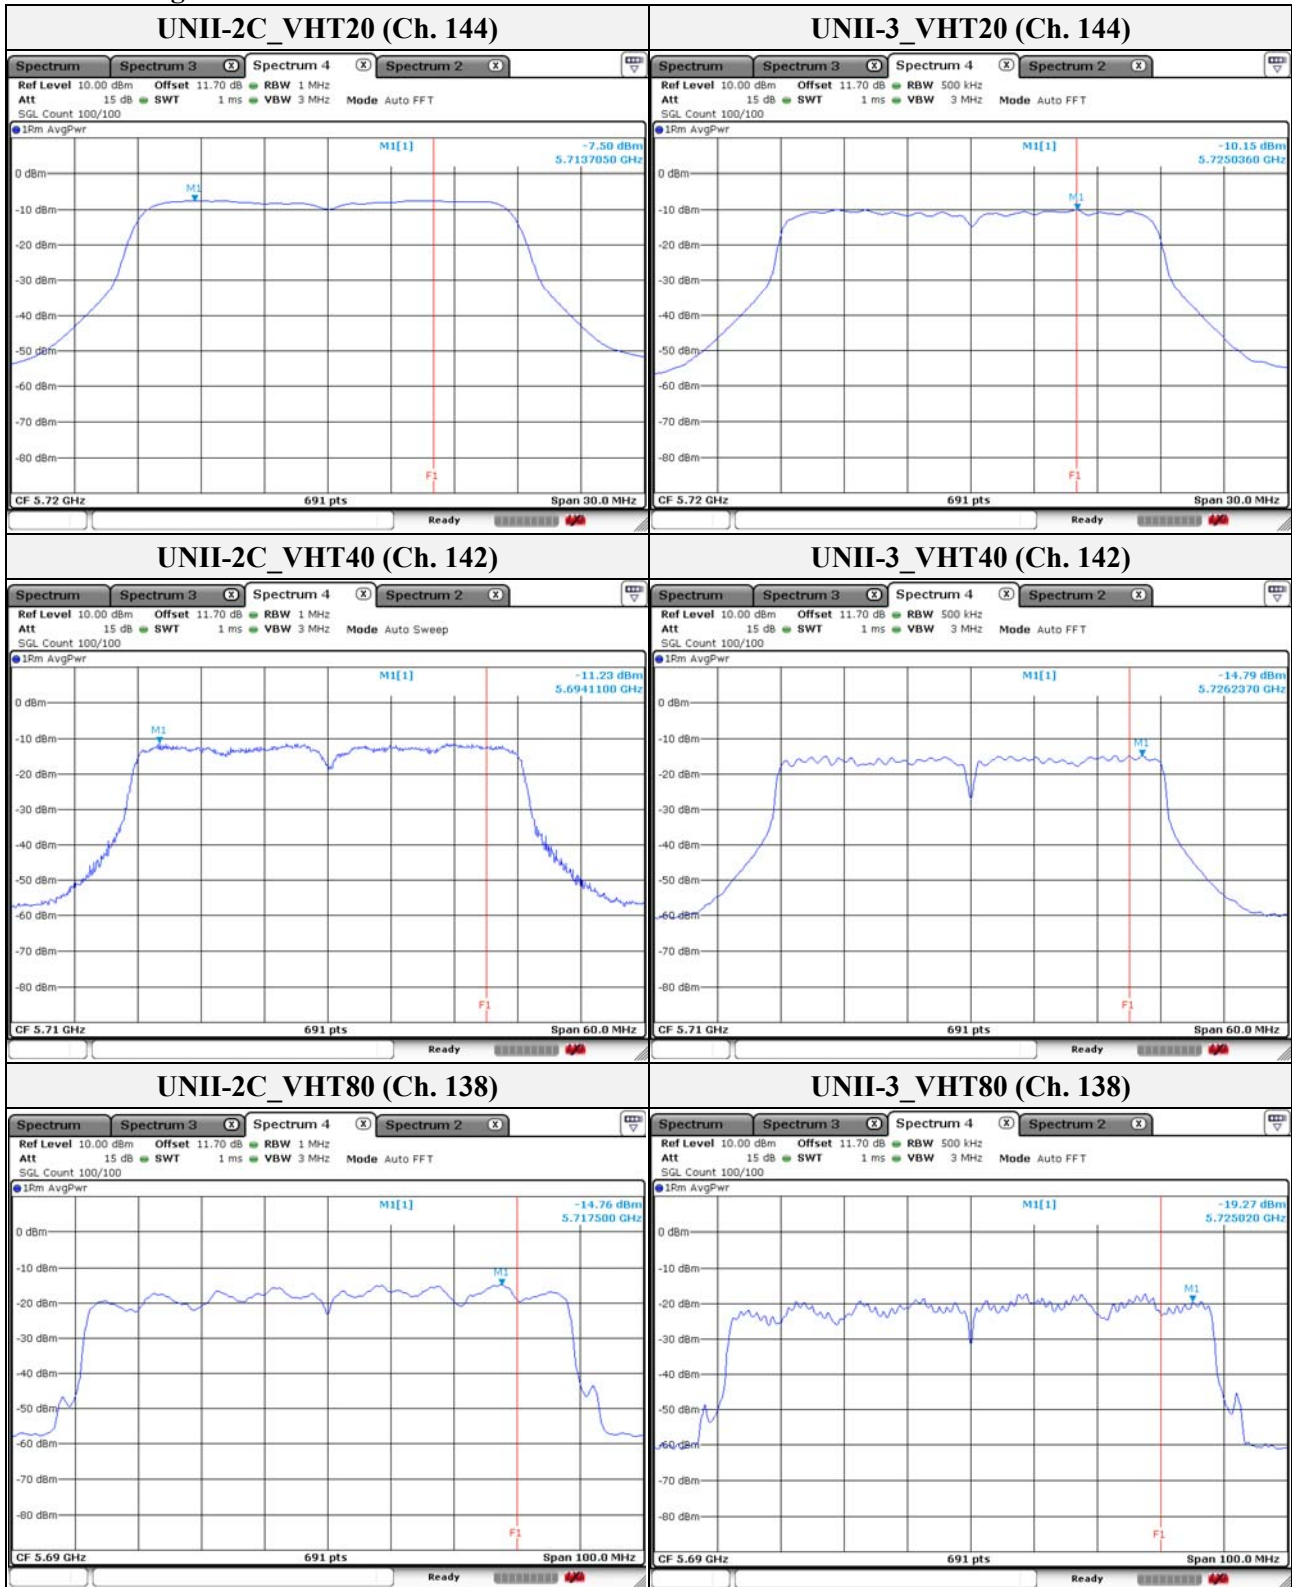


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

### 3.5. Frequency Stability

#### Test procedure

ANSI C63.10-2013, clause 6.8.1

#### Test setup

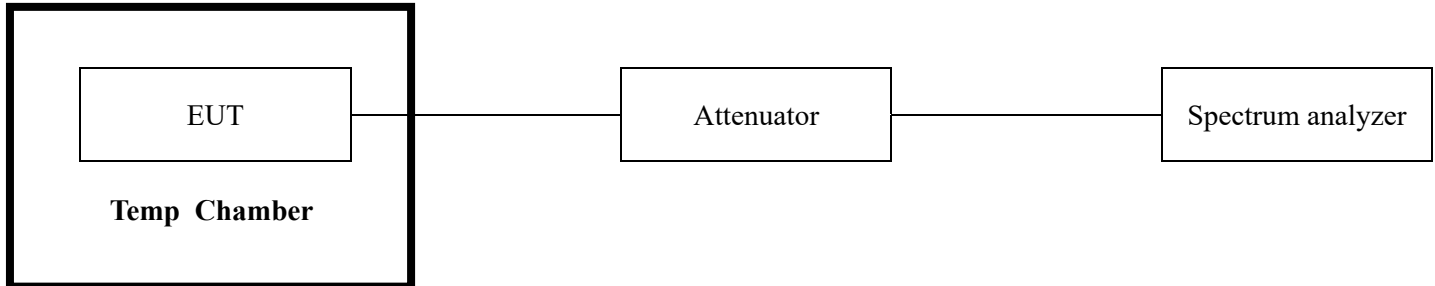

1. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
7. While maintaining a constant temperature inside the environmental chamber, turn the EUT on and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

#### Limit

N/A

**Test results**

Mode: UNII-1

Operating frequency: 5 180 MHz

| Test voltage (%) | Test voltage (V) | Temperature (°C) | Maintaining time | Measure frequency (MHz) | Frequency deviation (Hz) | Deviation (%) |
|------------------|------------------|------------------|------------------|-------------------------|--------------------------|---------------|
| 100 %            | DC 24            | -20              | Startup          | 5 180.028 385           | 28 385                   | 0.000 548     |
|                  |                  |                  | 2 minutes        | 5 180.027 981           | 27 981                   | 0.000 540     |
|                  |                  |                  | 5 minutes        | 5 180.027 141           | 27 141                   | 0.000 524     |
|                  |                  |                  | 10 minutes       | 5 180.026 930           | 26 930                   | 0.000 520     |
| 100 %            |                  | -10              | Startup          | 5 180.024 261           | 24 261                   | 0.000 468     |
|                  |                  |                  | 2 minutes        | 5 180.024 179           | 24 179                   | 0.000 467     |
|                  |                  |                  | 5 minutes        | 5 180.023 701           | 23 701                   | 0.000 458     |
|                  |                  |                  | 10 minutes       | 5 180.023 432           | 23 432                   | 0.000 452     |
| 100 %            |                  | 0                | Startup          | 5 180.016 678           | 16 678                   | 0.000 322     |
|                  |                  |                  | 2 minutes        | 5 180.016 605           | 16 605                   | 0.000 321     |
|                  |                  |                  | 5 minutes        | 5 180.016 522           | 16 522                   | 0.000 319     |
|                  |                  |                  | 10 minutes       | 5 180.015 131           | 15 131                   | 0.000 292     |
| 100 %            |                  | 10               | Startup          | 5 180.009 385           | 9 385                    | 0.000 181     |
|                  |                  |                  | 2 minutes        | 5 180.009 295           | 9 295                    | 0.000 179     |
|                  |                  |                  | 5 minutes        | 5 180.009 200           | 9 200                    | 0.000 178     |
|                  |                  |                  | 10 minutes       | 5 180.008 625           | 8 625                    | 0.000 166     |
| 100 %            | 20               | Startup          | 5 180.008 043    | 8 043                   | 0.000 155                |               |
|                  |                  | 2 minutes        | 5 180.007 448    | 7 448                   | 0.000 144                |               |
|                  |                  | 5 minutes        | 5 180.007 161    | 7 161                   | 0.000 138                |               |
|                  |                  | 10 minutes       | 5 180.006 464    | 6 464                   | 0.000 125                |               |
| 100 %            | 23               | Startup          | 5 180.006 705    | 6 705                   | 0.000 129                |               |
|                  |                  | 2 minutes        | 5 180.006 499    | 6 499                   | 0.000 125                |               |
|                  |                  | 5 minutes        | 5 180.005 542    | 5 542                   | 0.000 107                |               |
|                  |                  | 10 minutes       | 5 180.005 217    | 5 217                   | 0.000 101                |               |
| 100 %            | 30               | Startup          | 5 180.005 845    | 5 845                   | 0.000 113                |               |
|                  |                  | 2 minutes        | 5 180.006 417    | 6 417                   | 0.000 124                |               |
|                  |                  | 5 minutes        | 5 180.006 103    | 6 103                   | 0.000 118                |               |
|                  |                  | 10 minutes       | 5 180.005 155    | 5 155                   | 0.000 100                |               |
| 100 %            | 40               | Startup          | 5 179.991 169    | -883 1                  | -0.000 170               |               |
|                  |                  | 2 minutes        | 5 179.991 027    | -897 3                  | -0.000 173               |               |
|                  |                  | 5 minutes        | 5 179.990 908    | -909 2                  | -0.000 176               |               |
|                  |                  | 10 minutes       | 5 179.990 078    | -992 2                  | -0.000 192               |               |
| 100 %            | 50               | Startup          | 5 179.987 722    | -122 78                 | -0.000 237               |               |
|                  |                  | 2 minutes        | 5 179.987 579    | -124 21                 | -0.000 240               |               |
|                  |                  | 5 minutes        | 5 179.987 231    | -127 69                 | -0.000 247               |               |
|                  |                  | 10 minutes       | 5 179.986 937    | -130 63                 | -0.000 252               |               |
| 85 %             | DC 20.4          | 23               | Startup          | 5 180.008 186           | 8 186                    | 0.000 158     |
|                  |                  |                  | 2 minutes        | 5 180.007 868           | 7 868                    | 0.000 152     |
|                  |                  |                  | 5 minutes        | 5 180.007 584           | 7 584                    | 0.000 146     |
|                  |                  |                  | 10 minutes       | 5 180.007 545           | 7 545                    | 0.000 146     |
| 115 %            | DC 27.6          | 23               | Startup          | 5 180.008 797           | 8 797                    | 0.000 170     |
|                  |                  |                  | 2 minutes        | 5 180.008 289           | 8 289                    | 0.000 160     |
|                  |                  |                  | 5 minutes        | 5 180.008 277           | 8 277                    | 0.000 160     |
|                  |                  |                  | 10 minutes       | 5 180.007 435           | 7 435                    | 0.000 144     |

Note.

- All 9-36V DC mode were investigated and the data 24VDC was reported in this section is the worst case condition

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-19T0015  
Page (44) of (110)

Mode: UNII-2A  
Operating frequency: 5 260 Mhz

| Test voltage (%) | Test voltage (V) | Temperature (°C) | Maintaining time | Measure frequency (MHz) | Frequency deviation (Hz) | Deviation (%) |
|------------------|------------------|------------------|------------------|-------------------------|--------------------------|---------------|
| 100 %            | DC 24            | -20              | Startup          | 5 260.028 295           | 28 295                   | 0.000 538     |
|                  |                  |                  | 2 minutes        | 5 260.028 173           | 28 173                   | 0.000 536     |
|                  |                  |                  | 5 minutes        | 5 260.027 784           | 27 784                   | 0.000 528     |
|                  |                  |                  | 10 minutes       | 5 260.026 830           | 26 830                   | 0.000 510     |
| 100 %            |                  | -10              | Startup          | 5 260.025 120           | 25 120                   | 0.000 478     |
|                  |                  |                  | 2 minutes        | 5 260.024 956           | 24 956                   | 0.000 474     |
|                  |                  |                  | 5 minutes        | 5 260.024 468           | 24 468                   | 0.000 465     |
|                  |                  |                  | 10 minutes       | 5 260.023 625           | 23 625                   | 0.000 449     |
| 100 %            |                  | 0                | Startup          | 5 260.016 263           | 16 263                   | 0.000 309     |
|                  |                  |                  | 2 minutes        | 5 260.015 557           | 15 557                   | 0.000 296     |
|                  |                  |                  | 5 minutes        | 5 260.015 159           | 15 159                   | 0.000 288     |
|                  |                  |                  | 10 minutes       | 5 260.015 044           | 15 044                   | 0.000 286     |
| 100 %            |                  | 10               | Startup          | 5 260.010 160           | 10 160                   | 0.000 193     |
|                  |                  |                  | 2 minutes        | 5 260.009 172           | 9 172                    | 0.000 174     |
|                  |                  |                  | 5 minutes        | 5 260.008 795           | 8 795                    | 0.000 167     |
|                  |                  |                  | 10 minutes       | 5 260.008 673           | 8 673                    | 0.000 165     |
| 100 %            | 20               | Startup          | 5 260.007 733    | 7 733                   | 0.000 147                |               |
|                  |                  | 2 minutes        | 5 260.007 719    | 7 719                   | 0.000 147                |               |
|                  |                  | 5 minutes        | 5 260.006 921    | 6 921                   | 0.000 132                |               |
|                  |                  | 10 minutes       | 5 260.006 277    | 6 277                   | 0.000 119                |               |
| 100 %            | 23               | Startup          | 5 260.007 107    | 7 107                   | 0.000 135                |               |
|                  |                  | 2 minutes        | 5 260.006 977    | 6 977                   | 0.000 133                |               |
|                  |                  | 5 minutes        | 5 260.006 093    | 6 093                   | 0.000 116                |               |
|                  |                  | 10 minutes       | 5 260.005 454    | 5 454                   | 0.000 104                |               |
| 100 %            | 30               | Startup          | 5 260.004 528    | 4 528                   | 0.000 086                |               |
|                  |                  | 2 minutes        | 5 260.005 335    | 5 335                   | 0.000 101                |               |
|                  |                  | 5 minutes        | 5 260.005 097    | 5 097                   | 0.000 097                |               |
|                  |                  | 10 minutes       | 5 260.004 105    | 4 105                   | 0.000 078                |               |
| 100 %            | 40               | Startup          | 5 259.991 257    | -874 3                  | -0.000 166               |               |
|                  |                  | 2 minutes        | 5 259.990 881    | -911 9                  | -0.000 173               |               |
|                  |                  | 5 minutes        | 5 259.990 812    | -918 8                  | -0.000 175               |               |
|                  |                  | 10 minutes       | 5 259.990 355    | -964 5                  | -0.000 183               |               |
| 100 %            | 50               | Startup          | 5 259.988 344    | -116 56                 | -0.000 222               |               |
|                  |                  | 2 minutes        | 5 259.988 224    | -117 76                 | -0.000 224               |               |
|                  |                  | 5 minutes        | 5 259.987 563    | -124 37                 | -0.000 236               |               |
|                  |                  | 10 minutes       | 5 259.987 293    | -127 07                 | -0.000 242               |               |
| 85 %             | DC 20.4          | 23               | Startup          | 5 260.008 708           | 8 708                    | 0.000 166     |
|                  |                  |                  | 2 minutes        | 5 260.008 241           | 8 241                    | 0.000 157     |
|                  |                  |                  | 5 minutes        | 5 260.008 145           | 8 145                    | 0.000 155     |
|                  |                  |                  | 10 minutes       | 5 260.007 877           | 7 877                    | 0.000 150     |
| 115 %            | DC 27.6          | 23               | Startup          | 5 260.009 264           | 9 264                    | 0.000 176     |
|                  |                  |                  | 2 minutes        | 5 260.008 514           | 8 514                    | 0.000 162     |
|                  |                  |                  | 5 minutes        | 5 260.008 448           | 8 448                    | 0.000 161     |
|                  |                  |                  | 10 minutes       | 5 260.008 413           | 8 413                    | 0.000 160     |

Note.

- All 9-36V DC mode were investigated and the data 24VDC was reported in this section is the worst case condition

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

Mode: UNII-2C

 Operating frequency: 5500 MHz

| Test voltage (%) | Test voltage (V) | Temperature (°C) | Maintaining time | Measure frequency (MHz) | Frequency deviation (Hz) | Deviation (%) |
|------------------|------------------|------------------|------------------|-------------------------|--------------------------|---------------|
| 100 %            | DC 24            | -20              | Startup          | 5 500.028807            | 28 807                   | 0.000 524     |
|                  |                  |                  | 2 minutes        | 5 500.028707            | 28 707                   | 0.000 522     |
|                  |                  |                  | 5 minutes        | 5 500.027321            | 27 321                   | 0.000 497     |
|                  |                  |                  | 10 minutes       | 5 500.027036            | 27 036                   | 0.000 492     |
| 100 %            |                  | -10              | Startup          | 5 500.024961            | 24 961                   | 0.000 454     |
|                  |                  |                  | 2 minutes        | 5 500.023891            | 23 891                   | 0.000 434     |
|                  |                  |                  | 5 minutes        | 5 500.023773            | 23 773                   | 0.000 432     |
|                  |                  |                  | 10 minutes       | 5 500.023719            | 23 719                   | 0.000 431     |
| 100 %            |                  | 0                | Startup          | 5 500.016738            | 16 738                   | 0.000 304     |
|                  |                  |                  | 2 minutes        | 5 500.016322            | 16 322                   | 0.000 297     |
|                  |                  |                  | 5 minutes        | 5 500.016265            | 16 265                   | 0.000 296     |
|                  |                  |                  | 10 minutes       | 5 500.014990            | 14 990                   | 0.000 273     |
| 100 %            |                  | 10               | Startup          | 5 500.010528            | 10 528                   | 0.000 191     |
|                  |                  |                  | 2 minutes        | 5 500.010158            | 10 158                   | 0.000 185     |
|                  |                  |                  | 5 minutes        | 5 500.009687            | 9 687                    | 0.000 176     |
|                  |                  |                  | 10 minutes       | 5 500.008898            | 8 898                    | 0.000 162     |
| 100 %            | 20               | Startup          | 5 500.007707     | 7 707                   | 0.000 140                |               |
|                  |                  | 2 minutes        | 5 500.007163     | 7 163                   | 0.000 130                |               |
|                  |                  | 5 minutes        | 5 500.006787     | 6 787                   | 0.000 123                |               |
|                  |                  | 10 minutes       | 5 500.006395     | 6 395                   | 0.000 116                |               |
| 100 %            | 23               | Startup          | 5 500.007038     | 7 038                   | 0.000 128                |               |
|                  |                  | 2 minutes        | 5 500.006406     | 6 406                   | 0.000 116                |               |
|                  |                  | 5 minutes        | 5 500.006008     | 6 008                   | 0.000 109                |               |
|                  |                  | 10 minutes       | 5 500.005361     | 5 361                   | 0.000 097                |               |
| 100 %            | 30               | Startup          | 5 500.005946     | 5 946                   | 0.000 108                |               |
|                  |                  | 2 minutes        | 5 500.006083     | 6 083                   | 0.000 111                |               |
|                  |                  | 5 minutes        | 5 500.006081     | 6 081                   | 0.000 111                |               |
|                  |                  | 10 minutes       | 5 500.004990     | 4 990                   | 0.000 091                |               |
| 100 %            | 40               | Startup          | 5 499.990837     | -916 3                  | -0.000 167               |               |
|                  |                  | 2 minutes        | 5 499.990436     | -956 4                  | -0.000 174               |               |
|                  |                  | 5 minutes        | 5 499.990232     | -976 8                  | -0.000 178               |               |
|                  |                  | 10 minutes       | 5 499.989935     | -100 65                 | -0.000 183               |               |
| 100 %            | 50               | Startup          | 5 499.988198     | -118 02                 | -0.000 215               |               |
|                  |                  | 2 minutes        | 5 499.988015     | -119 85                 | -0.000 218               |               |
|                  |                  | 5 minutes        | 5 499.987686     | -123 14                 | -0.000 224               |               |
|                  |                  | 10 minutes       | 5 499.987663     | -123 37                 | -0.000 224               |               |
| 85 %             | DC 20.4          | 23               | Startup          | 5 500.008375            | 8 375                    | 0.000 152     |
|                  |                  |                  | 2 minutes        | 5 500.007763            | 7 763                    | 0.000 141     |
|                  |                  |                  | 5 minutes        | 5 500.007623            | 7 623                    | 0.000 139     |
|                  |                  |                  | 10 minutes       | 5 500.007468            | 7 468                    | 0.000 136     |
| 115 %            | DC 27.6          | 23               | Startup          | 5 500.008257            | 8 257                    | 0.000 150     |
|                  |                  |                  | 2 minutes        | 5 500.007890            | 7 890                    | 0.000 143     |
|                  |                  |                  | 5 minutes        | 5 500.007822            | 7 822                    | 0.000 142     |
|                  |                  |                  | 10 minutes       | 5 500.007592            | 7 592                    | 0.000 138     |

Note.

- All 9-36V DC mode were investigated and the data 24VDC was reported in this section is the worst case condition

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

Mode: UNII-3  
 Operating frequency: 5 745 MHz

| Test voltage (%) | Test voltage (V) | Temperature (°C) | Maintaining time | Measure frequency (MHz) | Frequency deviation (Hz) | Deviation (%) |
|------------------|------------------|------------------|------------------|-------------------------|--------------------------|---------------|
| 100 %            | DC 24            | -20              | Startup          | 5 745.028 509           | 28 509                   | 0.000 496     |
|                  |                  |                  | 2 minutes        | 5 745.028 291           | 28 291                   | 0.000 492     |
|                  |                  |                  | 5 minutes        | 5 745.027 075           | 27 075                   | 0.000 471     |
|                  |                  |                  | 10 minutes       | 5 745.026 919           | 26 919                   | 0.000 469     |
| 100 %            |                  | -10              | Startup          | 5 745.025 371           | 25 371                   | 0.000 442     |
|                  |                  |                  | 2 minutes        | 5 745.024 696           | 24 696                   | 0.000 430     |
|                  |                  |                  | 5 minutes        | 5 745.024 032           | 24 032                   | 0.000 418     |
|                  |                  |                  | 10 minutes       | 5 745.023 996           | 23 996                   | 0.000 418     |
| 100 %            |                  | 0                | Startup          | 5 745.016 814           | 16 814                   | 0.000 293     |
|                  |                  |                  | 2 minutes        | 5 745.016 637           | 16 637                   | 0.000 290     |
|                  |                  |                  | 5 minutes        | 5 745.015 579           | 15 579                   | 0.000 271     |
|                  |                  |                  | 10 minutes       | 5 745.015 294           | 15 294                   | 0.000 266     |
| 100 %            |                  | 10               | Startup          | 5 745.010 578           | 10 578                   | 0.000 184     |
|                  |                  |                  | 2 minutes        | 5 745.010 517           | 10 517                   | 0.000 183     |
|                  |                  |                  | 5 minutes        | 5 745.009 084           | 9 084                    | 0.000 158     |
|                  |                  |                  | 10 minutes       | 5 745.008 907           | 8 907                    | 0.000 155     |
| 100 %            | 20               | Startup          | 5 745.008 340    | 8 340                   | 0.000 145                |               |
|                  |                  | 2 minutes        | 5 745.006 878    | 6 878                   | 0.000 120                |               |
|                  |                  | 5 minutes        | 5 745.006 830    | 6 830                   | 0.000 119                |               |
|                  |                  | 10 minutes       | 5 745.006 513    | 6 513                   | 0.000 113                |               |
| 100 %            | 23               | Startup          | 5 745.007 032    | 7 032                   | 0.000 122                |               |
|                  |                  | 2 minutes        | 5 745.006 499    | 6 499                   | 0.000 113                |               |
|                  |                  | 5 minutes        | 5 745.006 485    | 6 485                   | 0.000 113                |               |
|                  |                  | 10 minutes       | 5 745.006 337    | 6 337                   | 0.000 110                |               |
| 100 %            | 30               | Startup          | 5 745.006 052    | 6 052                   | 0.000 105                |               |
|                  |                  | 2 minutes        | 5 745.005 864    | 5 864                   | 0.000 102                |               |
|                  |                  | 5 minutes        | 5 745.005 810    | 5 810                   | 0.000 101                |               |
|                  |                  | 10 minutes       | 5 745.005 547    | 5 547                   | 0.000 097                |               |
| 100 %            | 40               | Startup          | 5 744.991 748    | -825 3                  | -0.000 144               |               |
|                  |                  | 2 minutes        | 5 744.991 603    | -839 8                  | -0.000 146               |               |
|                  |                  | 5 minutes        | 5 744.989 995    | -100 06                 | -0.000 174               |               |
|                  |                  | 10 minutes       | 5 744.989 818    | -101 83                 | -0.000 177               |               |
| 100 %            | 50               | Startup          | 5 744.987 543    | -124 58                 | -0.000 217               |               |
|                  |                  | 2 minutes        | 5 744.987 541    | -124 60                 | -0.000 217               |               |
|                  |                  | 5 minutes        | 5 744.987 421    | -125 80                 | -0.000 219               |               |
|                  |                  | 10 minutes       | 5 744.987 090    | -129 11                 | -0.000 225               |               |
| 85 %             | DC 20.4          | 23               | Startup          | 5 745.008 764           | 8 764                    | 0.000 153     |
|                  |                  |                  | 2 minutes        | 5 745.008 710           | 8 710                    | 0.000 152     |
|                  |                  |                  | 5 minutes        | 5 745.008 581           | 8 581                    | 0.000 149     |
|                  |                  |                  | 10 minutes       | 5 745.007 996           | 7 996                    | 0.000 139     |
| 115 %            | DC 27.6          | 23               | Startup          | 5 745.009 183           | 9 183                    | 0.000 160     |
|                  |                  |                  | 2 minutes        | 5 745.008 623           | 8 623                    | 0.000 150     |
|                  |                  |                  | 5 minutes        | 5 745.008 311           | 8 311                    | 0.000 145     |
|                  |                  |                  | 10 minutes       | 5 745.007 761           | 7 761                    | 0.000 135     |

Note.


- All 9-36V DC mode were investigated and the data 24VDC was reported in this section is the worst case condition

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr


### 3.6. Radiated restricted band and emissions

#### Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

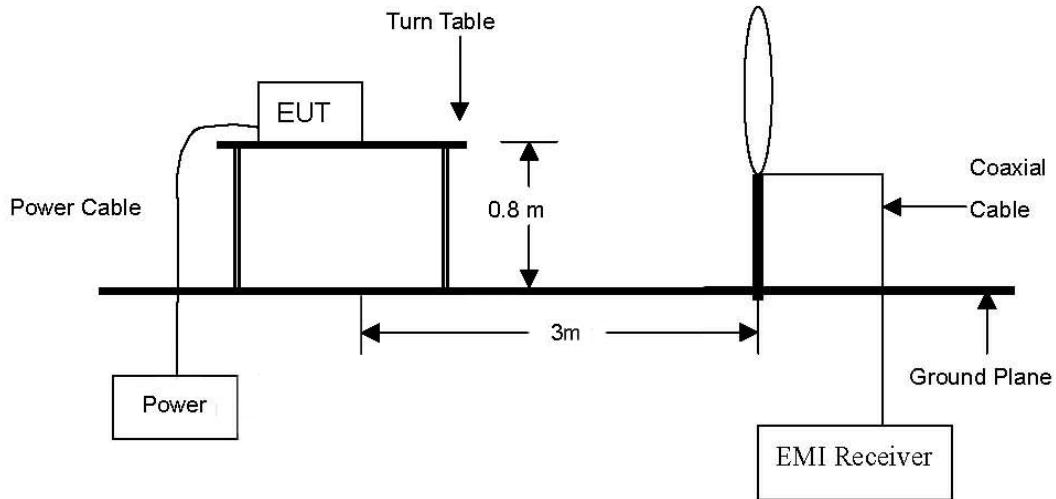

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

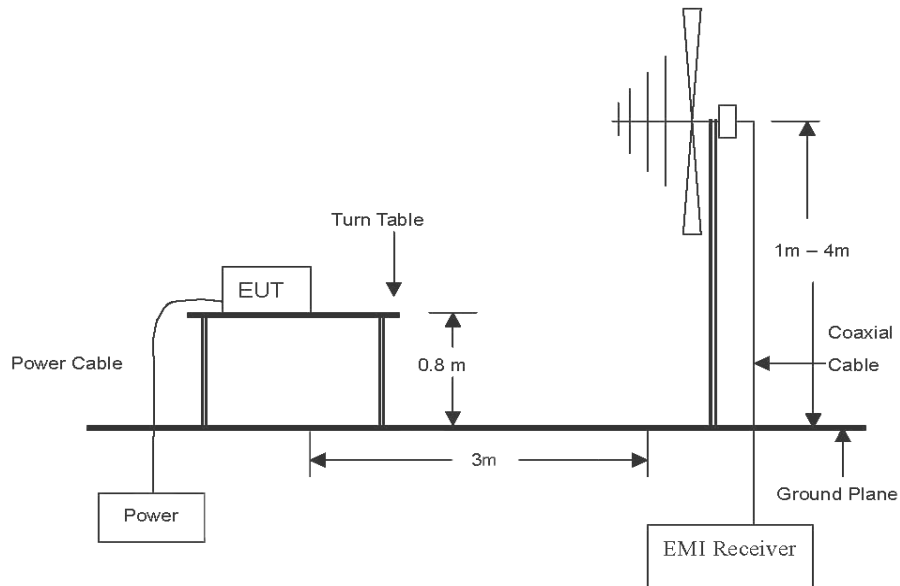

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

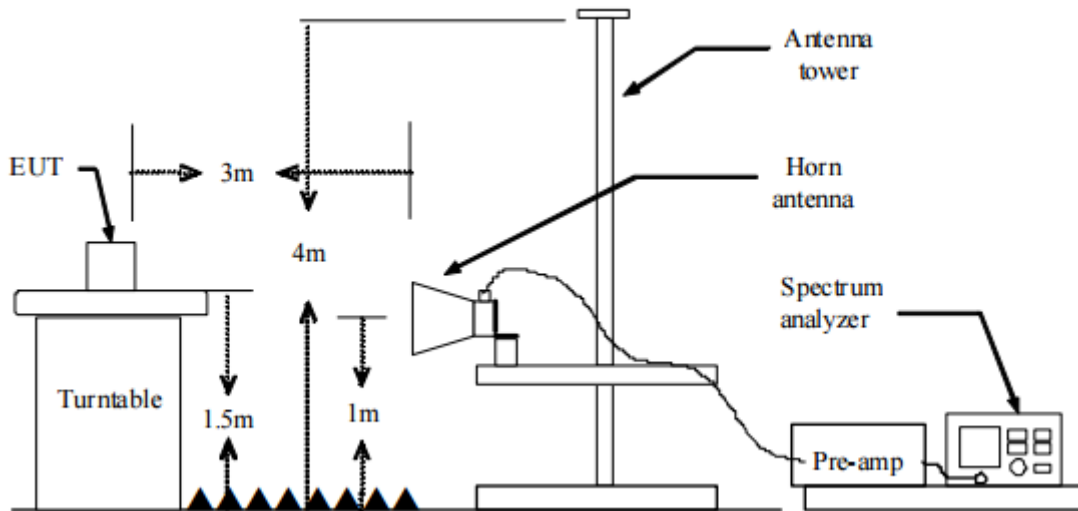

#### Test procedure below 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum hold mode.

#### Test procedure above 30 MHz

1. Spectrum analyzer settings for  $f < 1$  GHz:
  - ① Span = wide enough to fully capture the emission being measured
  - ② RBW = 120 kHz
  - ③ VBW  $\geq$  RBW
  - ④ Detector = quasi peak
  - ⑤ Sweep time = auto
  - ⑥ Trace = max hold
2. Spectrum analyzer settings for  $f \geq 1$  GHz: Peak
  - ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
  - ② RBW = 1 MHz
  - ③ VBW = 3 MHz ( $\geq 3 \times$  RBW)
  - ④ Detector = peak
  - ⑤ Sweep time = auto
  - ⑥ Trace = max hold
  - ⑦ Trace was allowed to stabilize



3. Spectrum analyzer settings for  $f \geq 1$  GHz: Average

- ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- ② RBW = 1 MHz
- ③ VBW  $\geq 3 \times$  RBW
- ④ Detector = RMS, if span/(# of points in sweep)  $\leq$  (RBW/2). Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- ⑤ Averaging type = power(i.e., RMS)
  - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
  - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- ⑥ Sweep = auto
- ⑦ Trace = max hold
- ⑧ Perform a trace average of at least 100 traces.
- ⑨ A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
  - 1) If power averaging (RMS) mode was used in step ⑤, then the applicable correction factor is  $10 \log(1/x)$ , where x is the duty cycle.
  - 2) If linear voltage averaging mode was used in step ⑤, then the applicable correction factor is  $20 \log(1/x)$ , where x is the duty cycle.
  - 3) If a specific emission is demonstrated to be continuous ( $\geq 98$  percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

**Note.**

1.  $f < 30$  MHz, extrapolation factor of 40 dB/decade of distance.  $F_d = 40 \log(D_m/D_s)$   
 $f \geq 30$  MHz, extrapolation factor of 20 dB/decade of distance.  $F_d = 20 \log(D_m/D_s)$   
Where:  
 $F_d$  = Distance factor in dB  
 $D_m$  = Measurement distance in meters  
 $D_s$  = Specification distance in meters
2. CF(Correction factors(dB)) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or  $F_d$ (dB)
4. Field strength(dB $\mu$ V/m) = Level(dB $\mu$ V) + CF (dB) + or DCF(dB)
5. Margin(dB) = Limit(dB $\mu$ V/m) - Field strength(dB $\mu$ V/m)
6. Emissions below 18 GHz were measured at a 3 meter test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z, it was determined that **X orientation** was worst-case orientation; therefore, all final radiated testing was performed with the EUT in **X orientation**.
8. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
9. All channels, modes (e.g. 802.11a, 802.11n (20 MHz/40 MHz BW), 802.11ac (20 MHz/40 MHz /80 MHz)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

10. According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

**Limit**

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

| Frequency (MHz) | Distance (Meters) | Radiated ( $\mu V/m$ ) |
|-----------------|-------------------|------------------------|
| 0.009 ~ 0.490   | 300               | 2400/F(kHz)            |
| 0.490 ~ 1.705   | 30                | 24000/F(kHz)           |
| 1.705 ~ 30.0    | 30                | 30                     |
| 30 ~ 88         | 3                 | 100**                  |
| 88 ~ 216        | 3                 | 150**                  |
| 216 ~ 960       | 3                 | 200**                  |
| Above 960       | 3                 | 500                    |

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

According to 15.407(b), (b) Undesirable emission limits: Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
  - i) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
  - ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

**Duty cycle**

Regarding to KDB 789033 D02 v02r01, B)2)b), the maximum duty cycles of all modes were investigated and set the spectrum analyzer as below.

Set RBW  $\geq$  OBW if possible; otherwise, set RBW to the largest available value. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$ , where T is defined in II.B.1.a), and the number of sweep points across duration T exceeds 100.

For the band 5.15-5.25 GHz

| Test mode     | T <sub>on</sub> time (ms) | Period (ms) | Duty cycle (Linear) | Duty cycle (%) | Duty cycle correction factor (dB) |
|---------------|---------------------------|-------------|---------------------|----------------|-----------------------------------|
| 802.11n_VHT20 | 0.206                     | 0.299       | 0.689               | 68.90          | 1.62                              |
| 802.11n_VHT40 | 0.120                     | 0.248       | 0.484               | 48.39          | 3.15                              |
| 802.11n_VHT80 | 0.078                     | 0.172       | 0.453               | 45.35          | 3.43                              |

For the band 5.250-5.350 GHz

| Test mode     | T <sub>on</sub> time (ms) | Period (ms) | Duty cycle (Linear) | Duty cycle (%) | Duty cycle correction factor (dB) |
|---------------|---------------------------|-------------|---------------------|----------------|-----------------------------------|
| 802.11n_VHT20 | 0.206                     | 0.255       | 0.808               | 80.78          | 0.93                              |
| 802.11n_VHT40 | 0.117                     | 0.257       | 0.455               | 45.53          | 3.42                              |
| 802.11n_VHT80 | 0.078                     | 0.245       | 0.318               | 31.84          | 4.97                              |

For the band 5.470-5.725 GHz

| Test mode     | T <sub>on</sub> time (ms) | Period (ms) | Duty cycle (Linear) | Duty cycle (%) | Duty cycle correction factor (dB) |
|---------------|---------------------------|-------------|---------------------|----------------|-----------------------------------|
| 802.11n_VHT20 | 0.206                     | 0.345       | 0.597               | 59.71          | 2.24                              |
| 802.11n_VHT40 | 0.117                     | 0.258       | 0.453               | 45.35          | 3.43                              |
| 802.11n_VHT80 | 0.078                     | 0.183       | 0.426               | 42.62          | 3.70                              |


For the band 5.725-5.85 GHz

| Test mode     | T <sub>on</sub> time (ms) | Period (ms) | Duty cycle (Linear) | Duty cycle (%) | Duty cycle correction factor (dB) |
|---------------|---------------------------|-------------|---------------------|----------------|-----------------------------------|
| 802.11n_VHT20 | 0.207                     | 0.351       | 0.590               | 58.97          | 2.29                              |
| 802.11n_VHT40 | 0.125                     | 0.236       | 0.530               | 52.97          | 2.76                              |
| 802.11n_VHT80 | 0.078                     | 0.178       | 0.438               | 43.82          | 3.58                              |


**Note:**

Duty cycle (Linear) = T<sub>on</sub> time/Period

DCF(Duty cycle correction factor (dB)) = 10log(1/duty cycle)

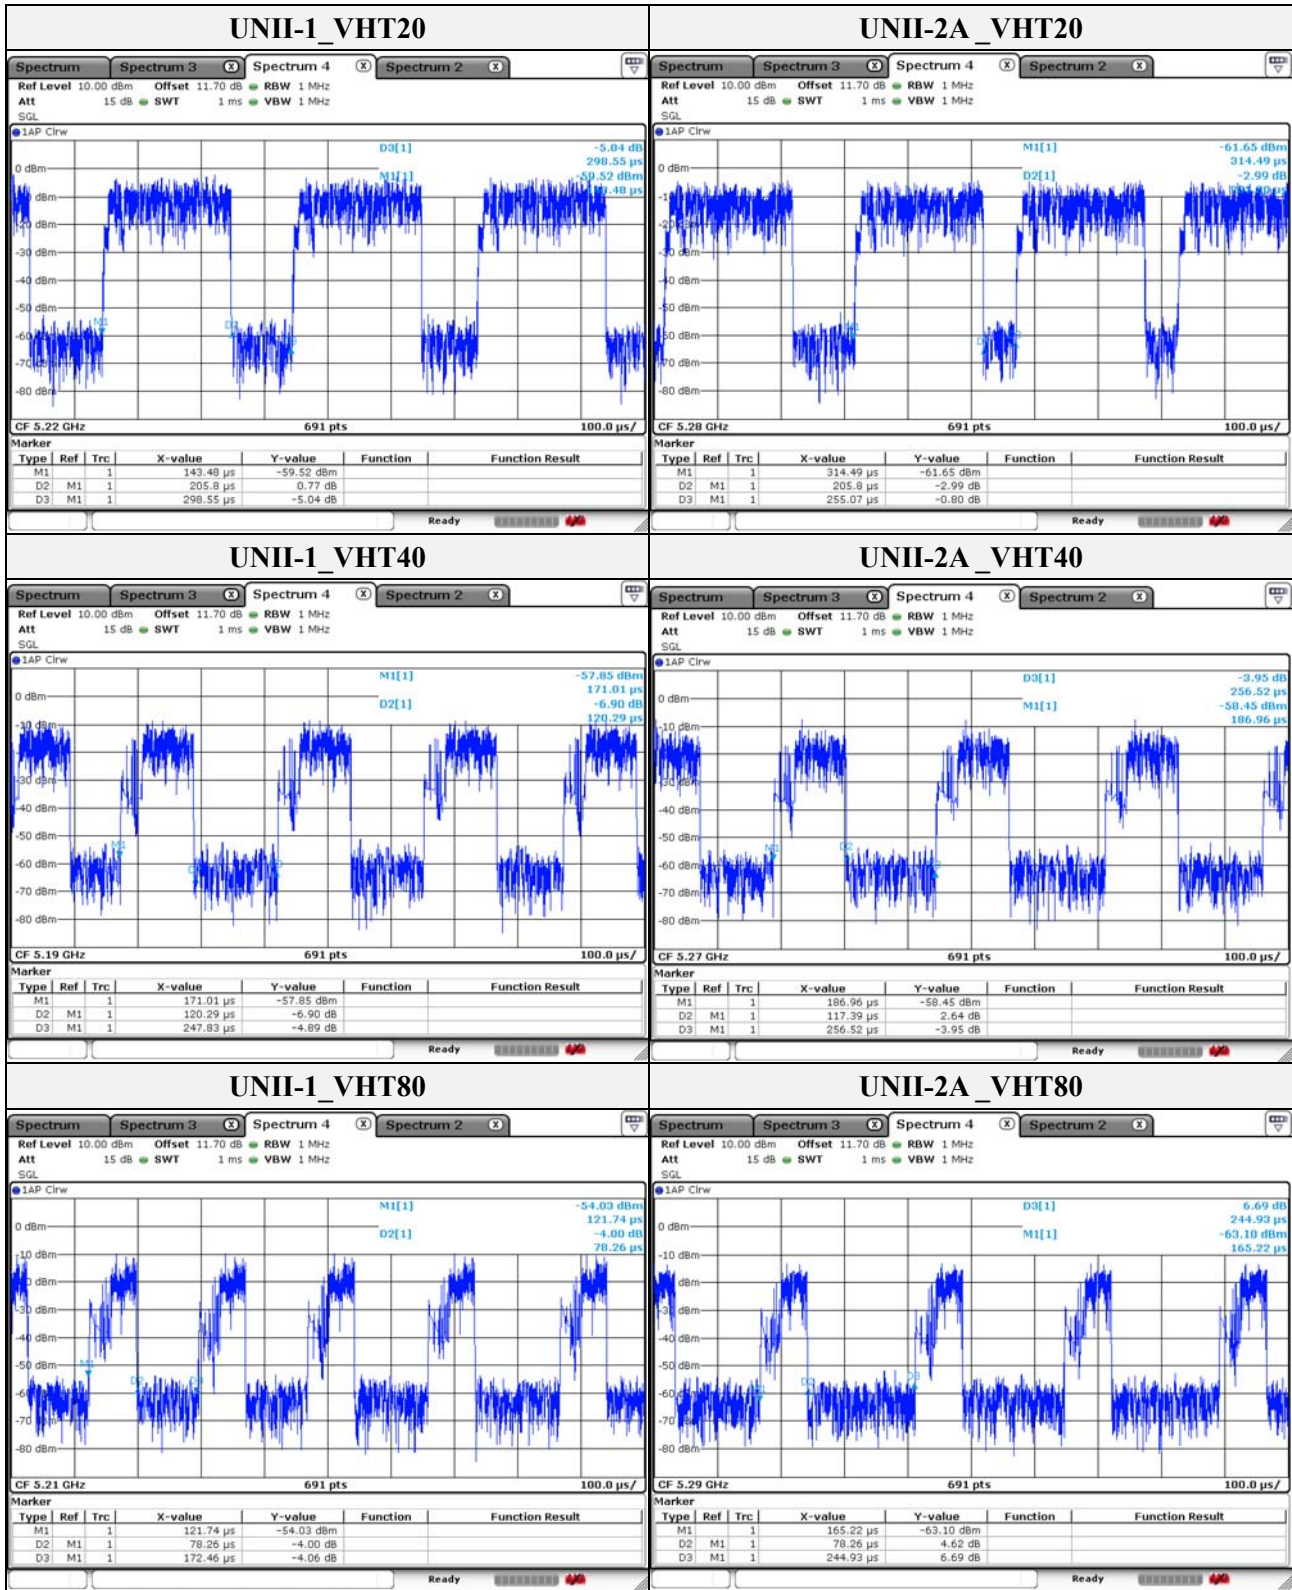


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

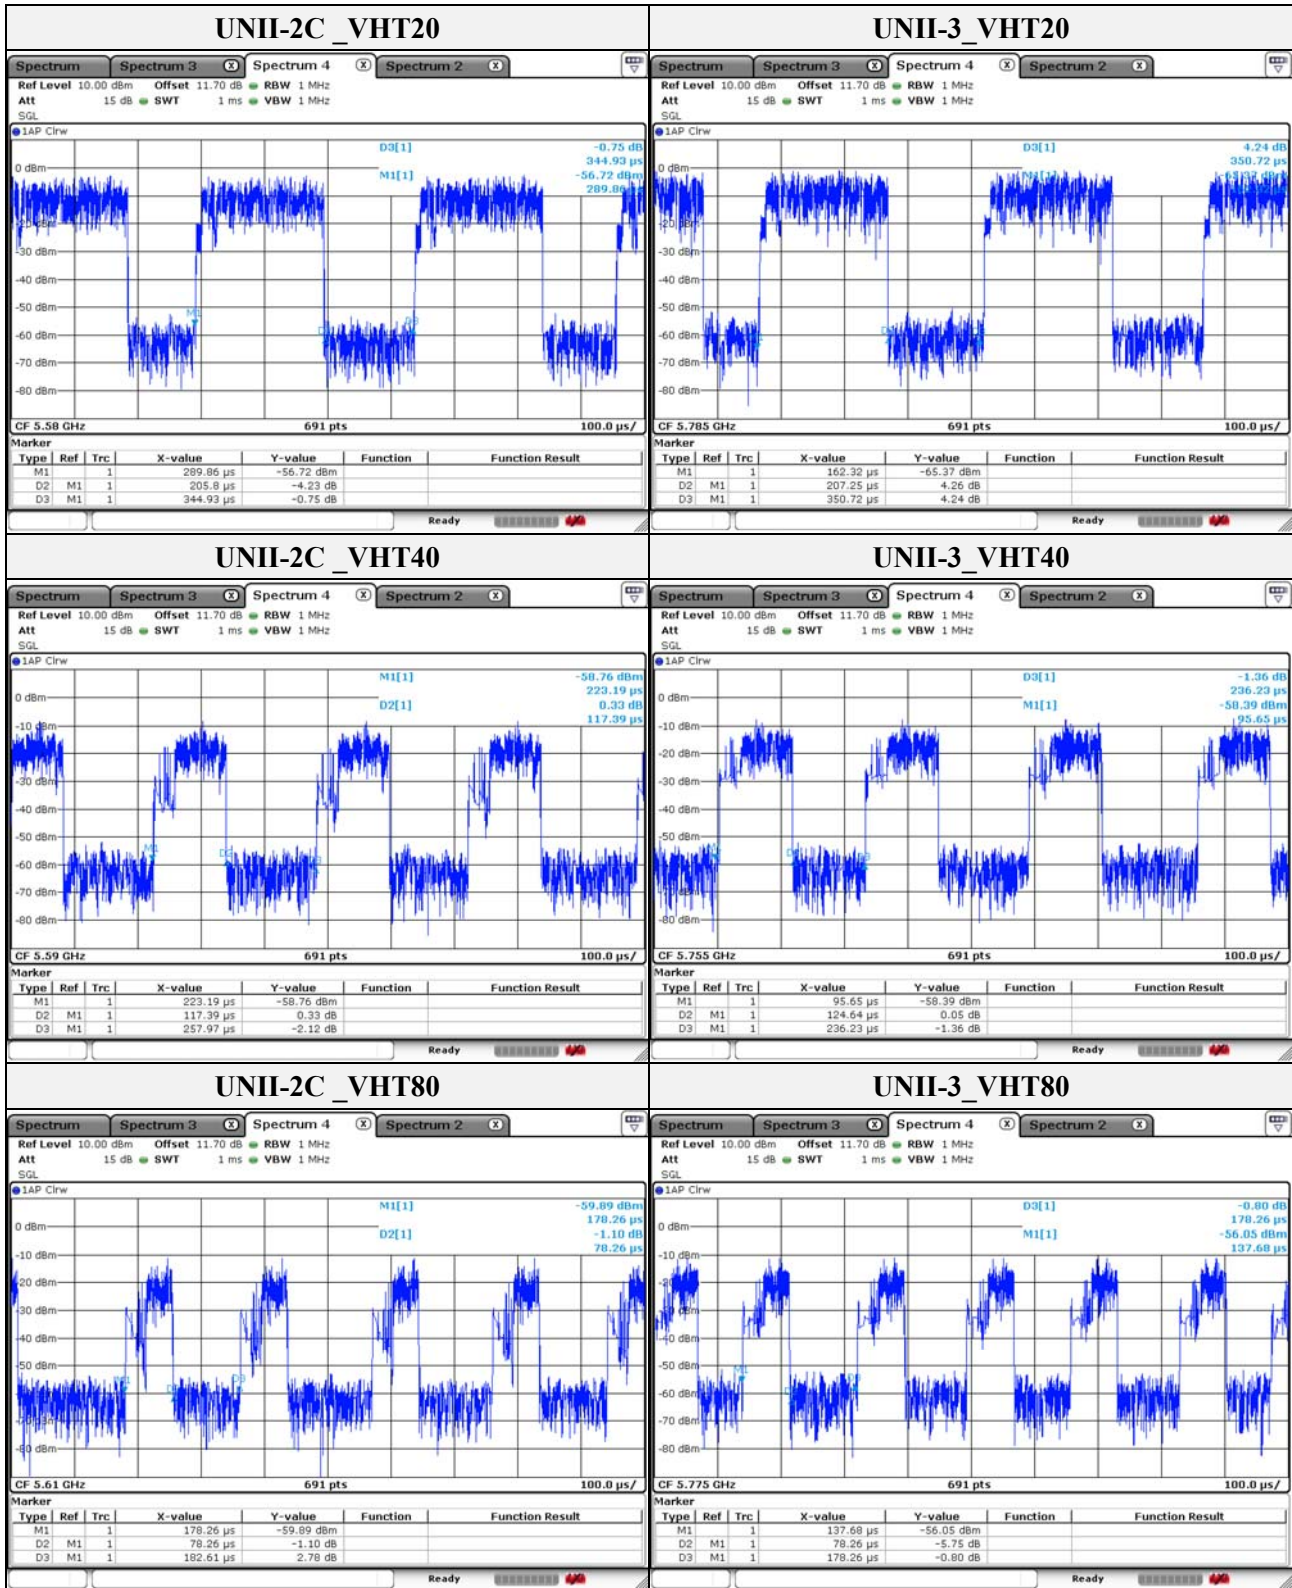

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

**Test results (Below 30 MHz) – Worst case**

Mode: UNII-3  
 Distance of measurement: 3 meter  
 Channel: 165(worst case)

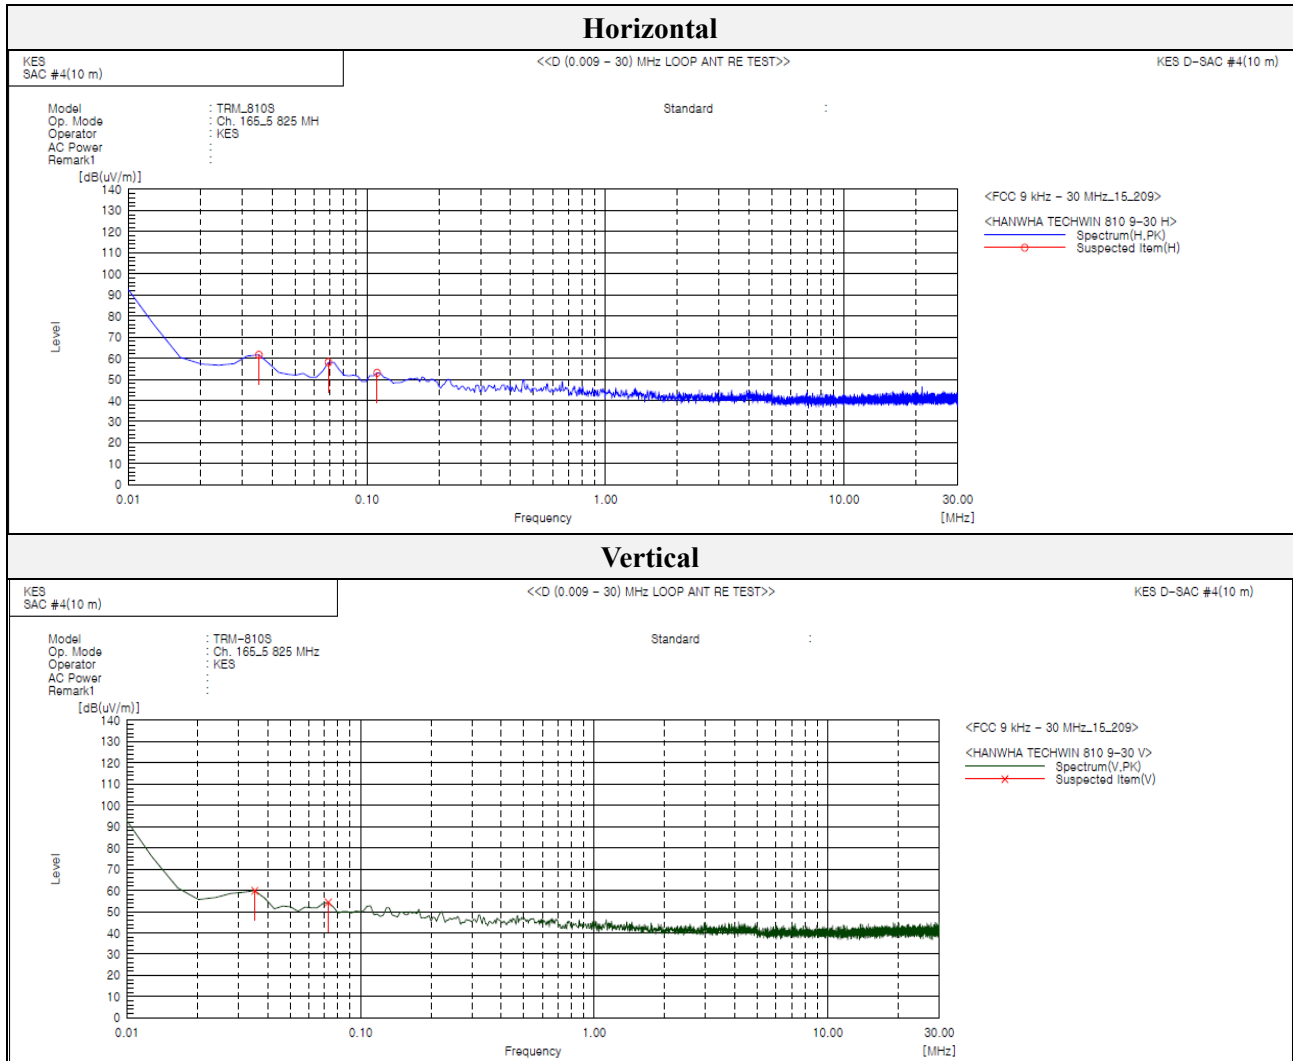


| Frequency (MHz) | Level (dB $\mu$ V) | Ant. Pol. (H/V) | CF (dB) | Distance factor (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-----------------|---------|----------------------|-------------------------------|----------------------|-------------|
| 0.035           | 42.10              | H               | 19.50   | -80                  | -18.40                        | 36.70                | 55.10       |
| 0.069           | 38.40              | H               | 19.70   | -80                  | -21.90                        | 3080                 | 52.70       |
| 0.110           | 33.40              | H               | 19.70   | -80                  | -26.90                        | 26.80                | 53.70       |
| 0.035           | 40.30              | V               | 19.50   | -80                  | -20.20                        | 36.70                | 56.90       |
| 0.073           | 34.60              | V               | 19.70   | -80                  | -25.70                        | 30.40                | 56.10       |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

**Test results (Below 1 000 MHz) – Worst case**

Mode: UNII-3  
 Distance of measurement: 3 meter  
 Channel: 165(worst case)

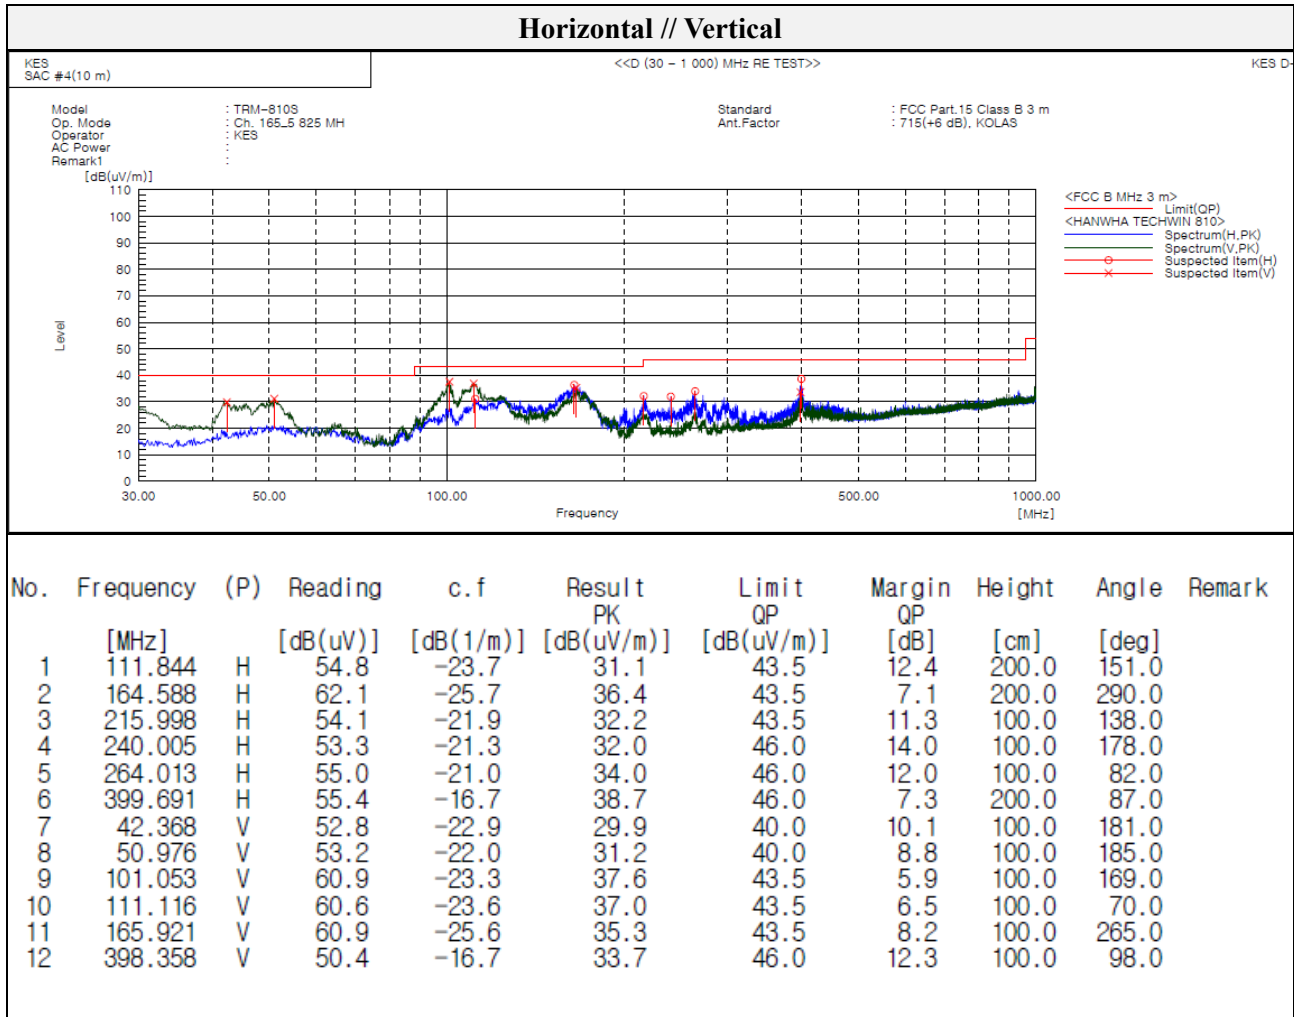

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr





**Test results (Above 1 000 MHz)**


Mode: UNII-1(VHT20)  
Distance of measurement: 3 meter  
Channel: 36

**- Spurious**

| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 1 061.50        | 53.96              | Peak        | H               | -8.29   | -        | 45.67                         | 74.00                | 28.33       |
| 1 517.40        | 49.04              | Peak        | H               | -5.51   | -        | 43.53                         | 74.00                | 30.47       |
| 1 843.00        | 46.49              | Peak        | H               | -2.42   | -        | 44.07                         | 68.20                | 24.13       |
| 1 061.50        | 56.22              | Peak        | V               | -8.29   | -        | 47.93                         | 74.00                | 26.07       |
| 1 524.60        | 51.20              | Peak        | V               | -5.45   | -        | 45.75                         | 74.00                | 28.25       |
| 2 125.20        | 47.12              | Peak        | V               | -0.67   | -        | 46.45                         | 68.20                | 21.75       |

**- Band edge**

| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 4 812.50        | 46.83              | Peak        | H               | 7.06    | -        | 53.89                         | 74.00                | 20.11       |
| 4 804.50        | 46.12              | Peak        | V               | 7.00    | -        | 53.12                         | 74.00                | 20.88       |

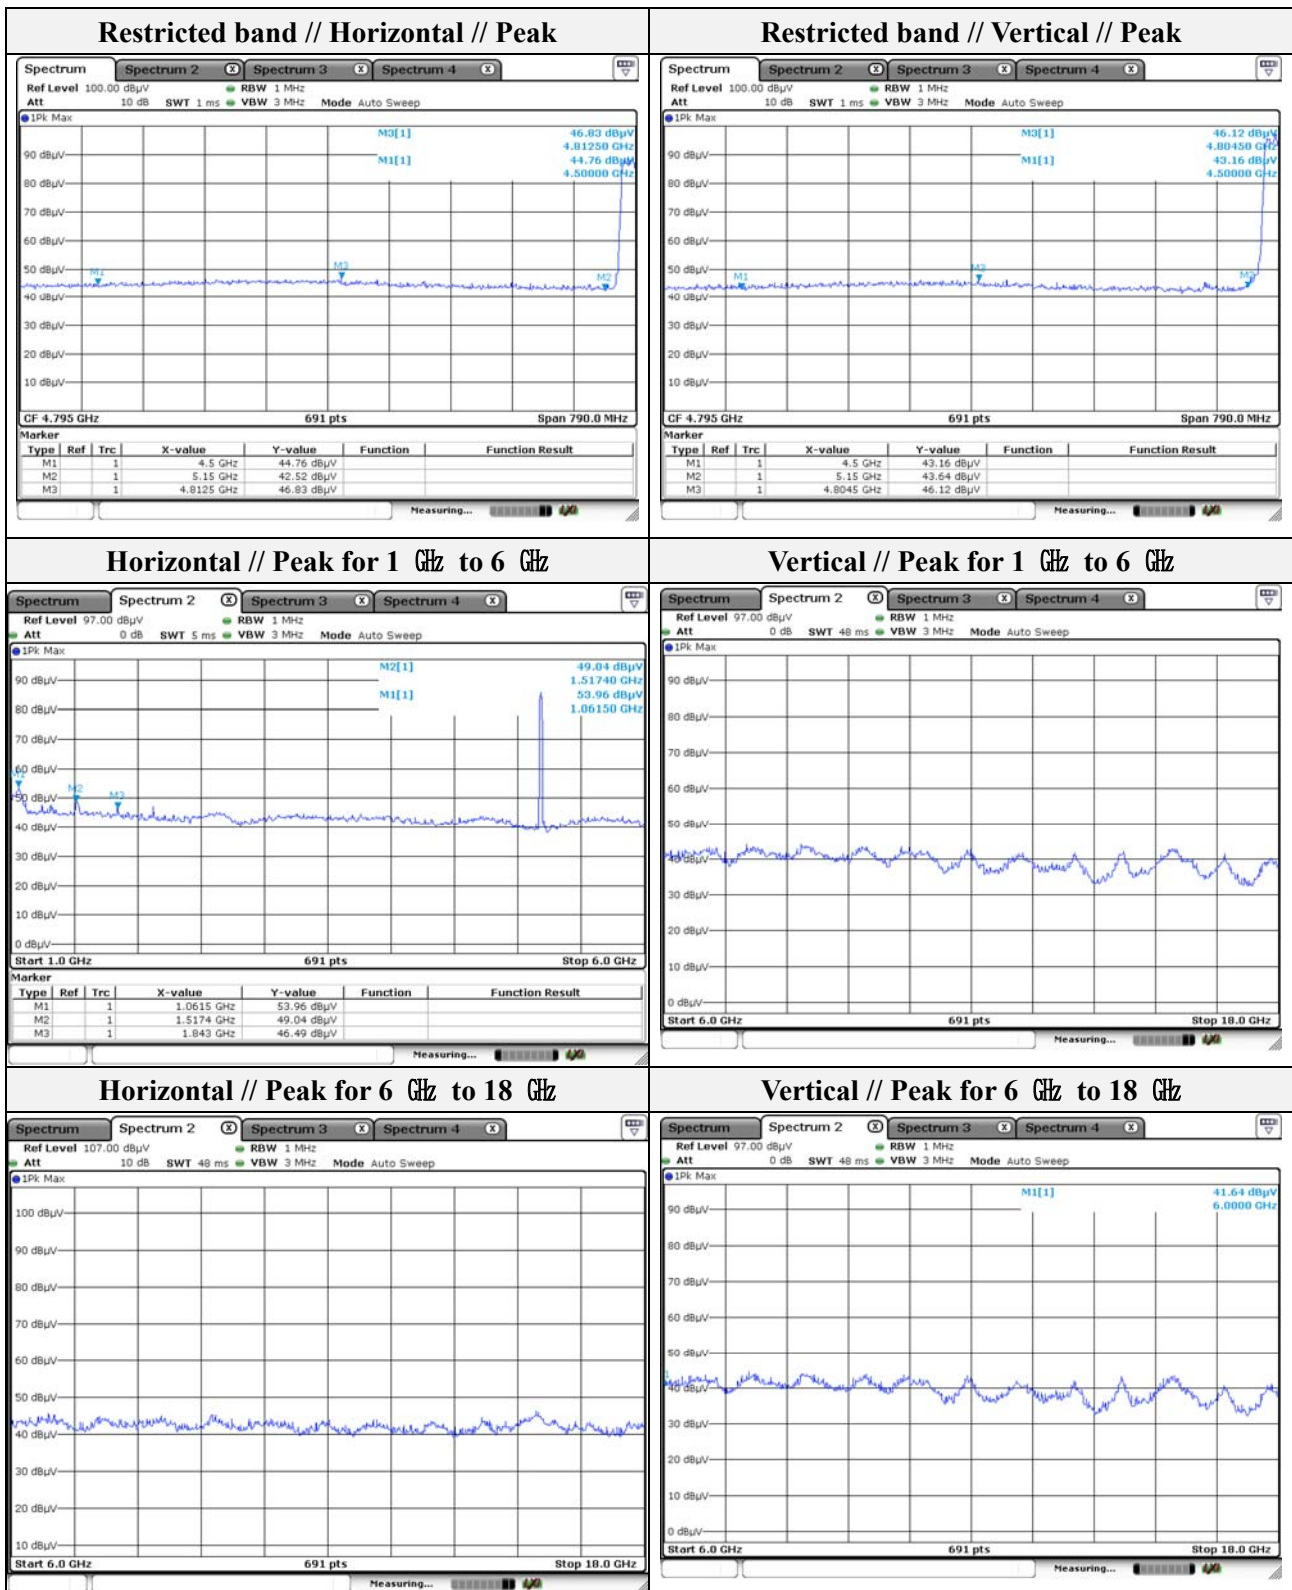


Note.

1. No spurious emission were detected above 6 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

Mode: UNII-1(VHT20)  
 Distance of measurement: 3 meter  
 Channel: 44  
 - **Spurious**

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 061.50        | 52.46        | Peak        | H               | -8.29   | -        | 44.17                   | 74.00          | 29.83       |
| 1 524.60        | 47.59        | Peak        | H               | -5.45   | -        | 42.14                   | 74.00          | 31.86       |
| 2 125.20        | 47.09        | Peak        | H               | -0.67   | -        | 46.42                   | 68.20          | 21.78       |
| 1 010.90        | 53.23        | Peak        | V               | -8.58   | -        | 44.65                   | 74.00          | 29.35       |
| 1 524.60        | 52.65        | Peak        | V               | -5.45   | -        | 47.20                   | 74.00          | 26.80       |
| 2 125.20        | 49.54        | Peak        | V               | -0.67   | -        | 48.87                   | 68.20          | 19.33       |

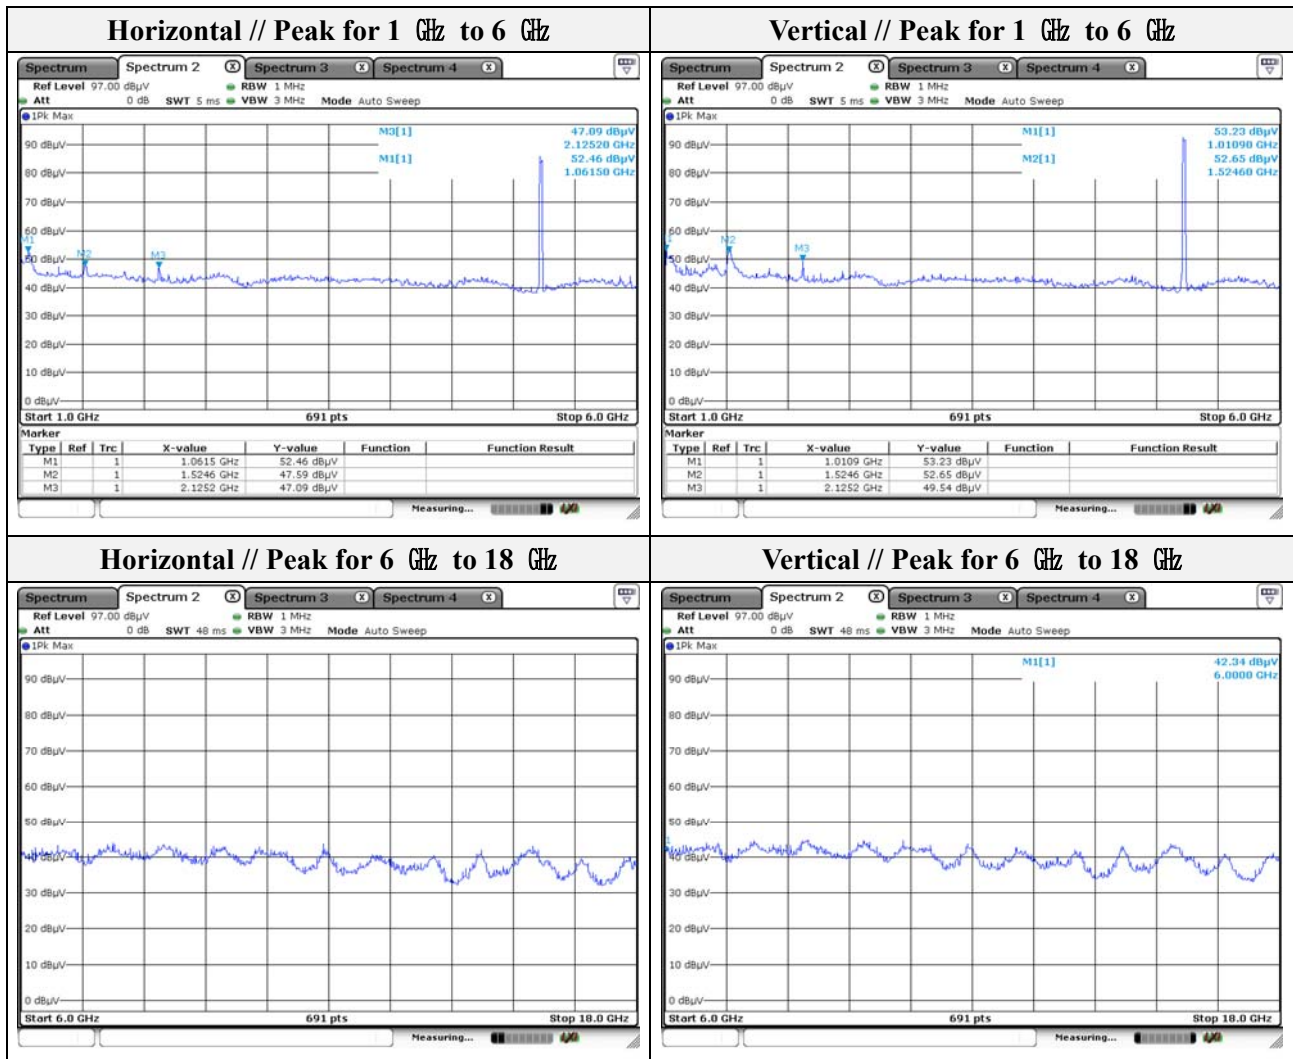

Note.  
 1. No spurious emission were detected above 6 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr


Mode: UNII-1(VHT20)

Distance of measurement: 3 meter

Channel: 48

**- Spurious**

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 054.30        | 54.13        | Peak        | H               | -8.33   | -        | 45.80                   | 74.00          | 28.20       |
| 1 524.60        | 48.73        | Peak        | H               | -5.45   | -        | 43.28                   | 74.00          | 30.72       |
| 2 125.20        | 46.27        | Peak        | H               | -0.67   | -        | 45.60                   | 68.20          | 22.60       |
| 1 054.30        | 54.78        | Peak        | V               | -8.33   | -        | 46.45                   | 74.00          | 27.55       |
| 1 524.60        | 50.09        | Peak        | V               | -5.45   | -        | 44.64                   | 74.00          | 29.36       |
| 2 125.20        | 48.11        | Peak        | V               | -0.67   | -        | 47.44                   | 68.20          | 20.76       |

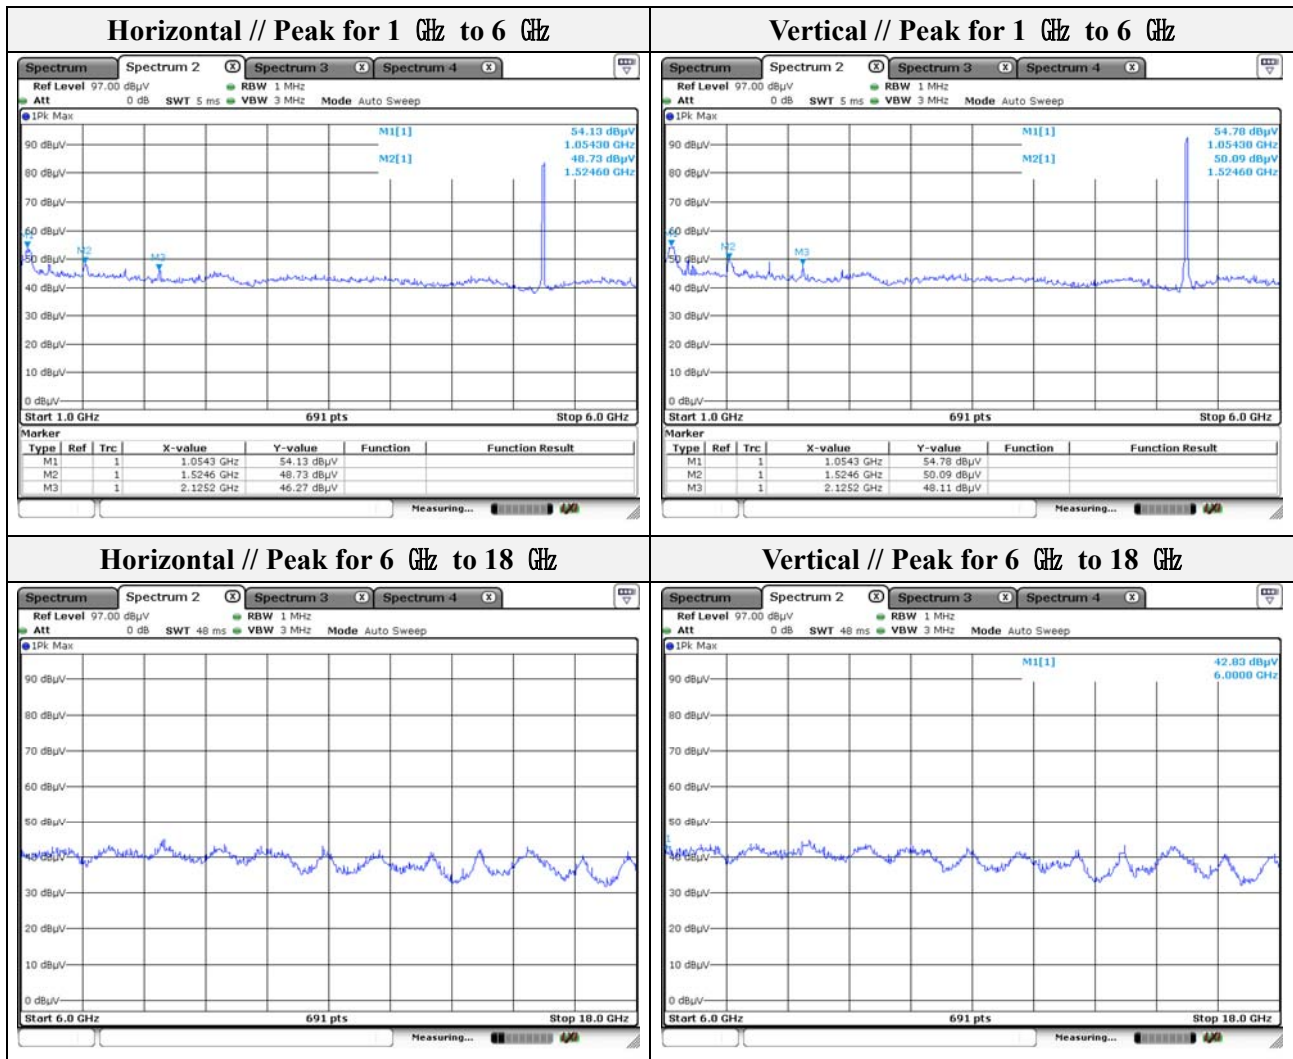

Note.

1. No spurious emission were detected above 6 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr


Mode: UNII-2A(VHT20)

Distance of measurement: 3 meter

Channel: 52

**- Spurious**

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 068.70        | 53.60        | Peak        | H               | -8.25   | -        | 45.35                   | 74.00          | 28.65       |
| 1 531.80        | 49.03        | Peak        | H               | -5.38   | -        | 43.65                   | 74.00          | 30.35       |
| 2 125.20        | 45.55        | Peak        | H               | -0.67   | -        | 44.88                   | 68.20          | 22.65       |
| 1 010.90        | 49.12        | Peak        | V               | -8.58   | -        | 40.54                   | 74.00          | 33.46       |
| 1 531.80        | 52.60        | Peak        | V               | -5.38   | -        | 47.22                   | 74.00          | 26.78       |
| 2 125.20        | 47.27        | Peak        | V               | -0.67   | -        | 46.60                   | 68.20          | 20.93       |

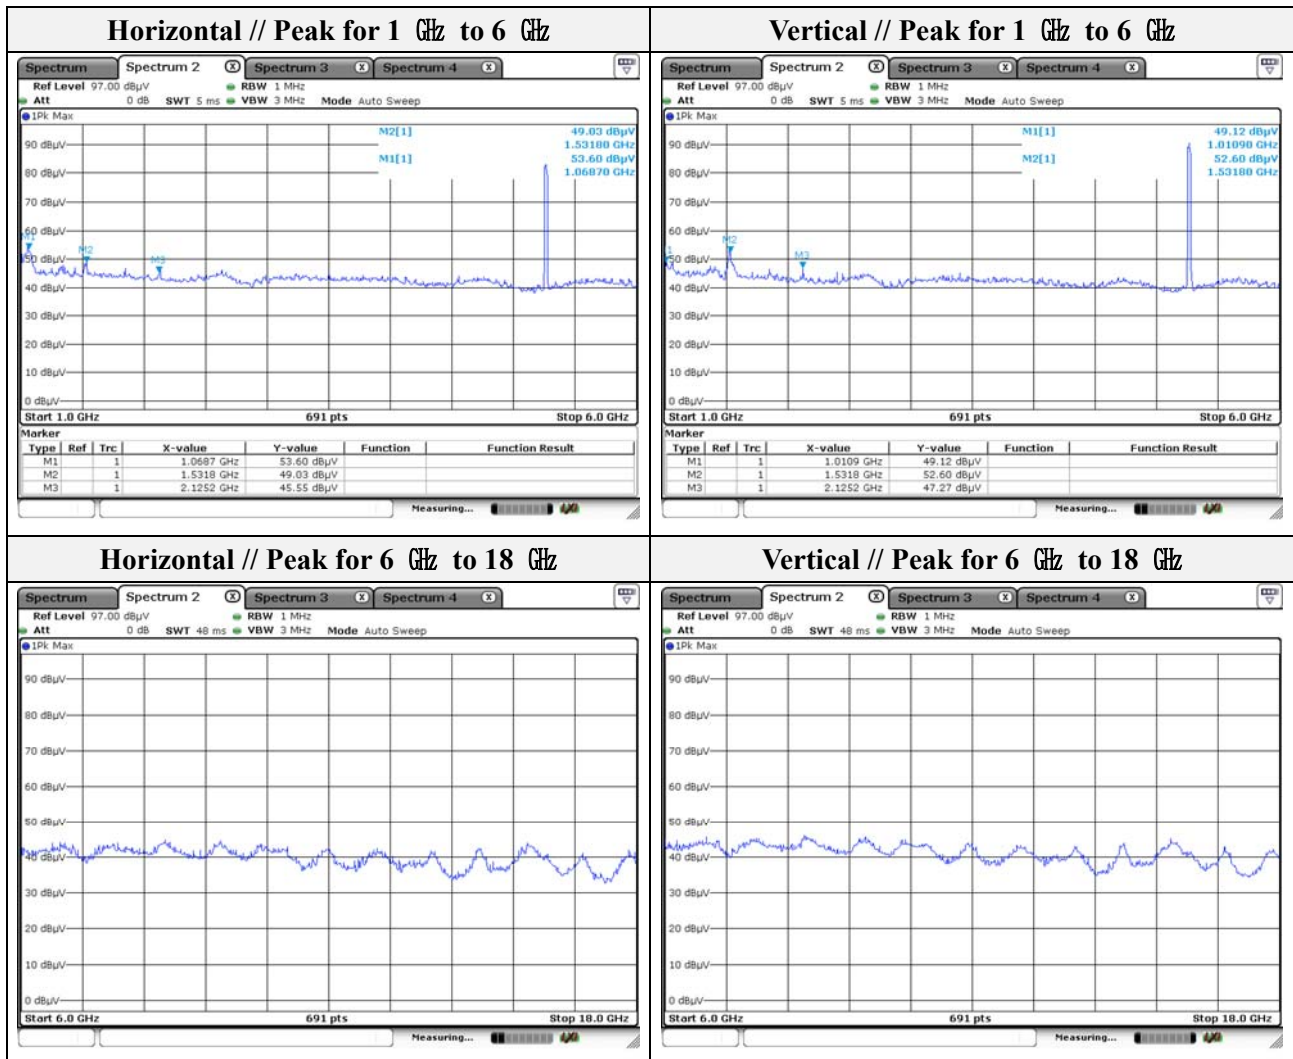

Note.

1. No spurious emission were detected above 6 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr


Mode: UNII-2A(VHT20)

Distance of measurement: 3 meter

Channel: 56

**- Spurious**

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 076.00        | 51.13        | Peak        | H               | -8.21   | -        | 42.92                   | 74.00          | 31.08       |
| 1 510.10        | 46.73        | Peak        | H               | -5.58   | -        | 41.15                   | 74.00          | 32.85       |
| 1 083.20        | 50.62        | Peak        | V               | -8.17   | -        | 42.45                   | 74.00          | 31.55       |
| 1 517.40        | 51.82        | Peak        | V               | -5.51   | -        | 46.31                   | 74.00          | 27.69       |
| 1 850.20        | 50.22        | Peak        | V               | -2.35   | -        | 47.87                   | 68.20          | 20.33       |

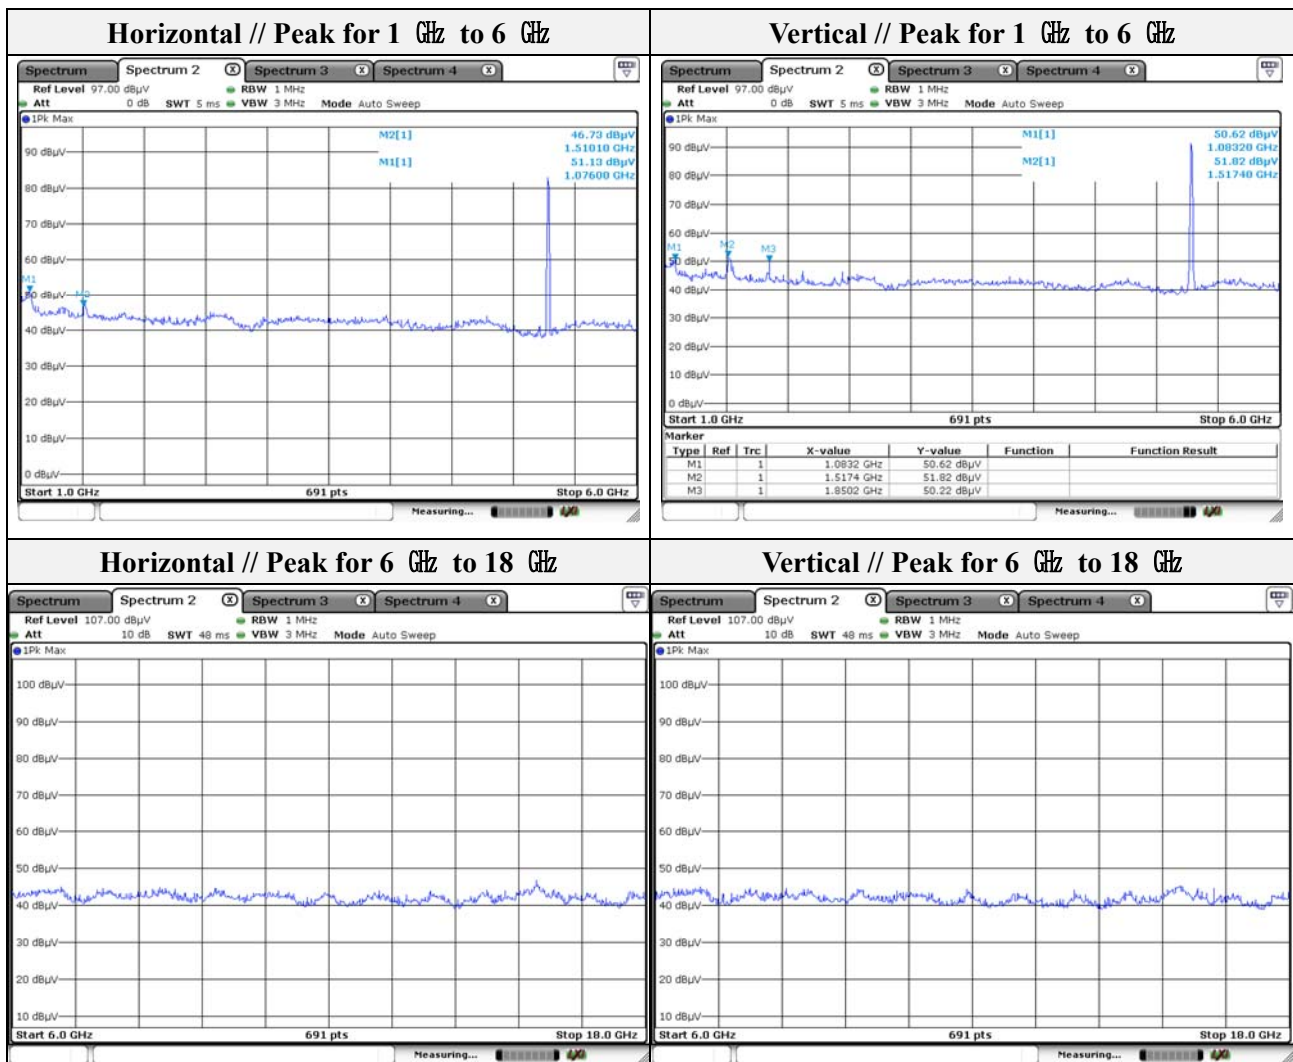

**Note.**

1. No spurious emission were detected above 6 GHz.



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-19T0015  
Page (63) of (110)

Mode: UNII-2A(VHT20)  
Distance of measurement: 3 meter  
Channel: 64


- **Spurious**

| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 1 039.80        | 54.64              | Peak        | H               | -8.42   | -        | 46.22                         | 74.00                | 27.78       |
| 1 531.80        | 48.88              | Peak        | H               | -5.38   | -        | 43.50                         | 74.00                | 30.50       |
| 2 125.20        | 45.86              | Peak        | H               | -0.67   | -        | 45.19                         | 68.20                | 23.01       |
| 1 068.70        | 55.06              | Peak        | V               | -8.25   | -        | 46.81                         | 74.00                | 27.19       |
| 1 524.60        | 50.23              | Peak        | V               | -5.45   | -        | 44.78                         | 74.00                | 29.22       |
| 2 125.20        | 47.19              | Peak        | V               | -0.67   | -        | 46.52                         | 68.20                | 21.68       |

- **Band edge**


| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 5 387.92        | 45.12              | Peak        | H               | 7.90    | -        | 50.70                         | 74.00                | 23.30       |
| 5 394.17        | 46.34              | Peak        | V               | 7.89    | -        | 55.30                         | 74.00                | 18.70       |
| 5 400.19        | 35.26              | Average     | V               | 7.88    | 0.93     | 46.61                         | 54.00                | 7.39        |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

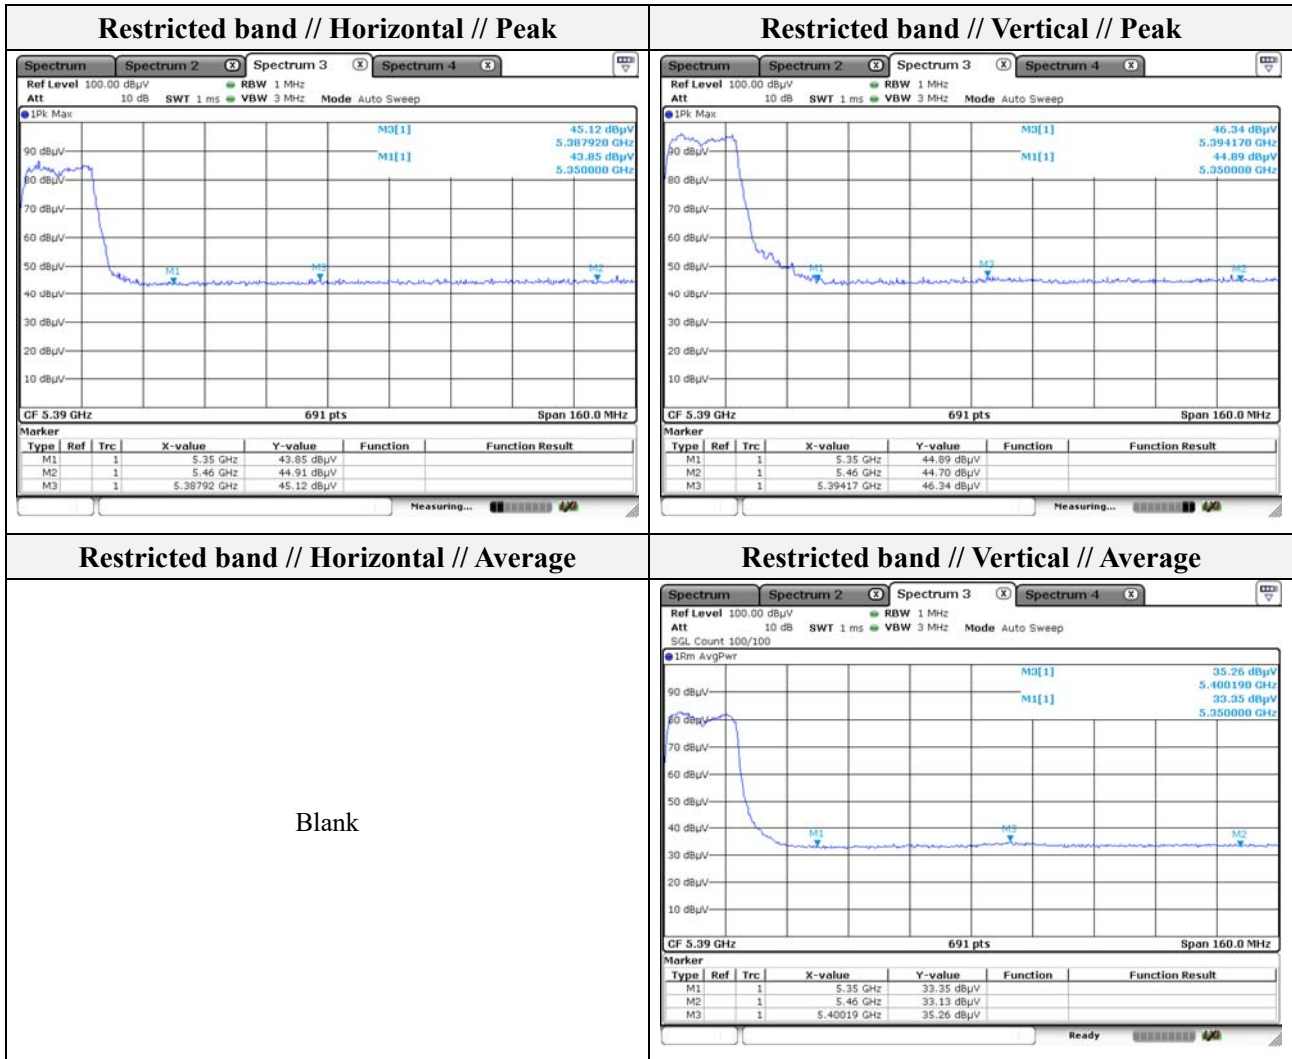

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr



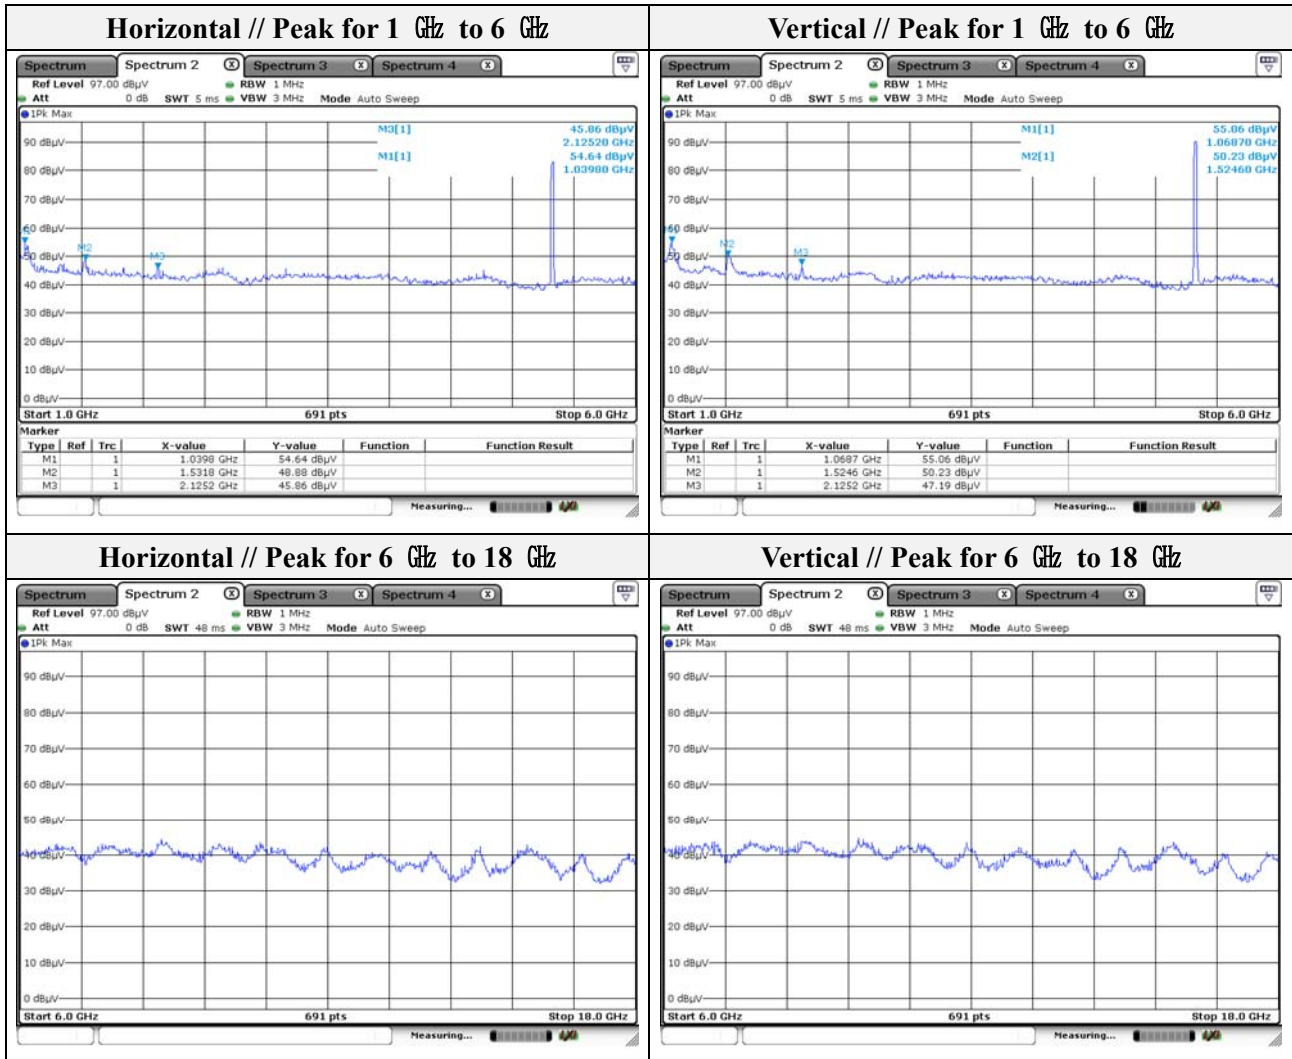

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

Mode: UNII-2C(VHT20)  
 Distance of measurement: 3 meter  
 Channel: 100


**- Spurious**

| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 1 039.80        | 50.36              | Peak        | H               | -8.42   | -        | 41.94                         | 74.00                | 32.06       |
| 1 539.10        | 45.83              | Peak        | H               | -5.31   | -        | 40.52                         | 74.00                | 33.48       |
| 1 039.80        | 49.87              | Peak        | V               | -8.42   | -        | 41.45                         | 74.00                | 32.55       |
| 1 300.30        | 53.85              | Peak        | V               | -6.87   | -        | 46.98                         | 74.00                | 27.02       |
| 1 531.80        | 53.28              | Peak        | V               | -5.38   | -        | 47.90                         | 74.00                | 26.10       |

**- Band edge**

| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 5 394.49        | 45.53              | Peak        | H               | 7.89    | -        | 53.42                         | 74.00                | 20.58       |
| 5 420.33        | 45.89              | Peak        | V               | 7.86    | -        | 53.75                         | 74.00                | 20.25       |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

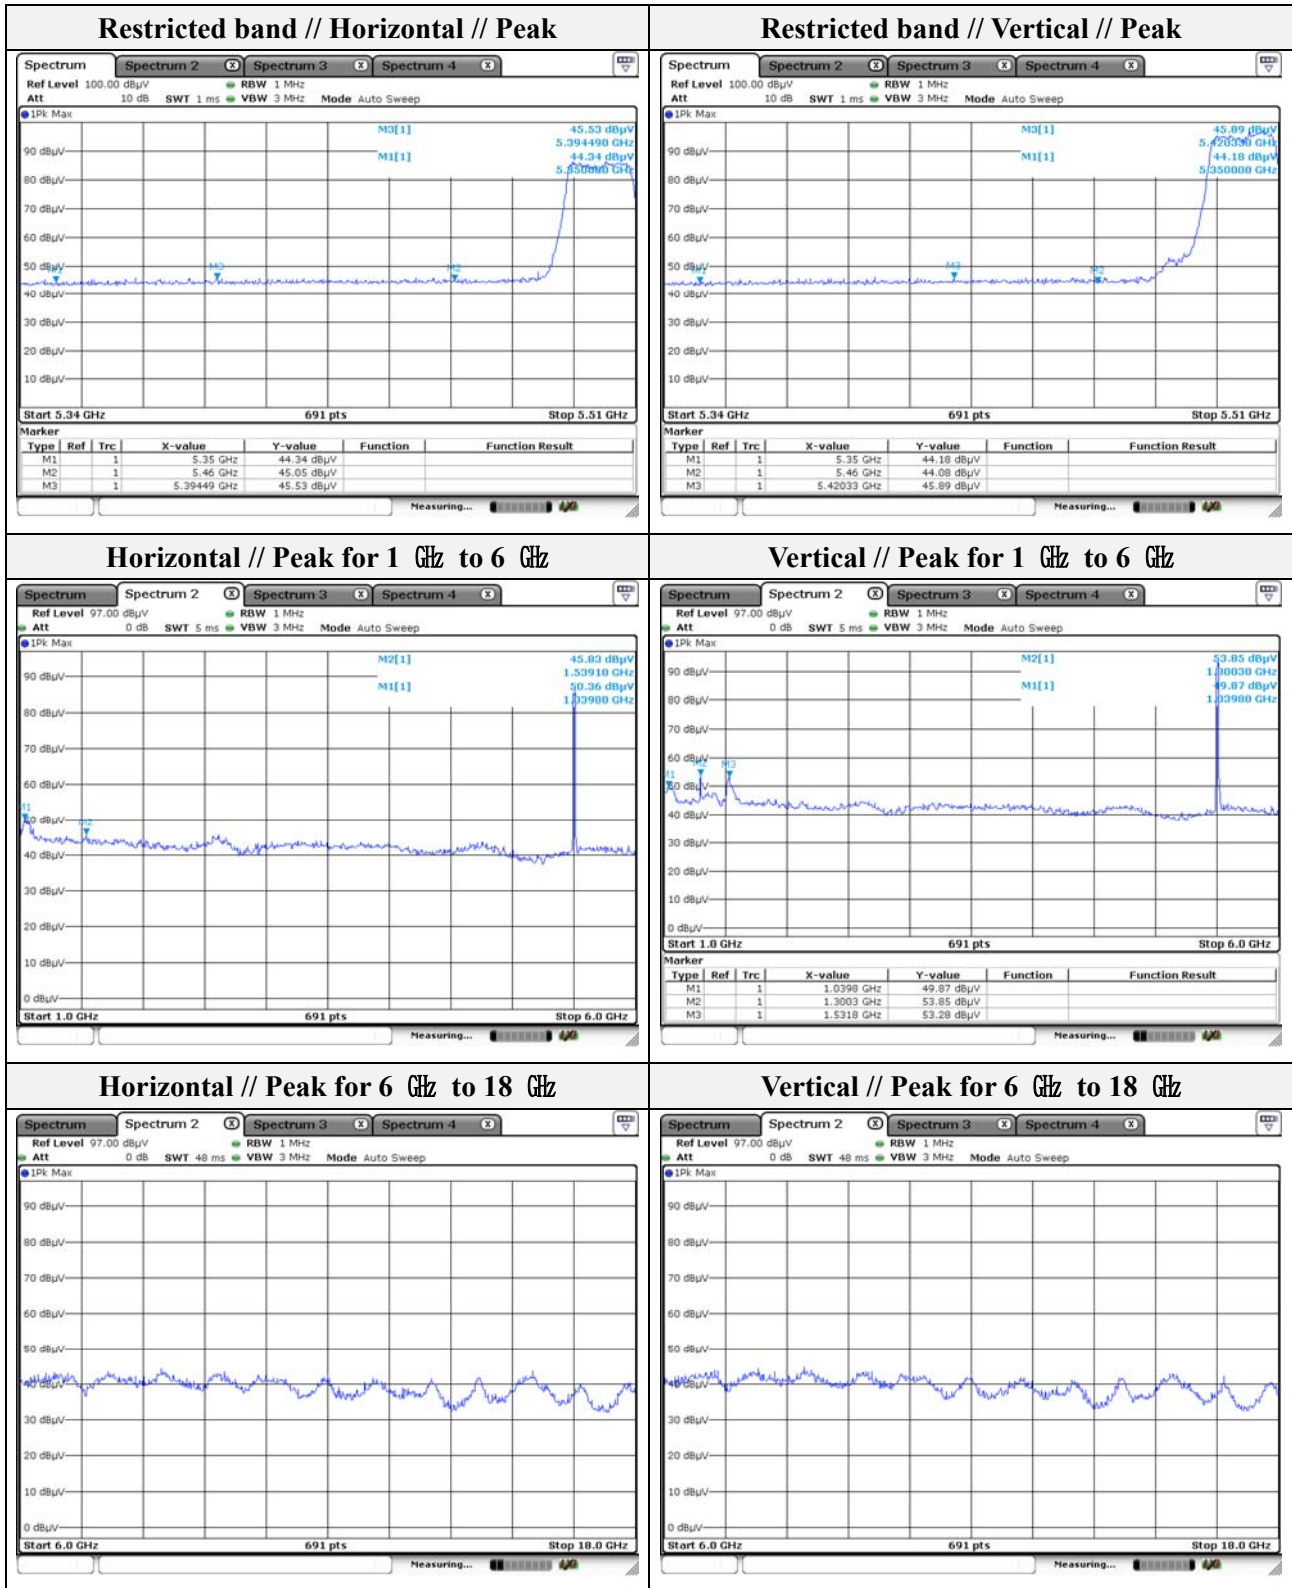

Note.

1. No spurious emission were detected above 6 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr


Mode: UNII-2C(VHT20)

Distance of measurement: 3 meter

Channel: 120

**- Spurious**

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 039.80        | 53.18        | Peak        | H               | -8.42   | -        | 44.76                   | 74.00          | 29.24       |
| 1 524.60        | 49.29        | Peak        | H               | -5.45   | -        | 43.84                   | 74.00          | 30.16       |
| 2 125.20        | 46.55        | Peak        | H               | -0.67   | -        | 45.88                   | 68.20          | 22.32       |
| 1 039.80        | 50.36        | Peak        | V               | -8.42   | -        | 41.94                   | 74.00          | 32.06       |
| 2 125.20        | 46.71        | Peak        | V               | -0.67   | -        | 46.04                   | 68.20          | 22.16       |

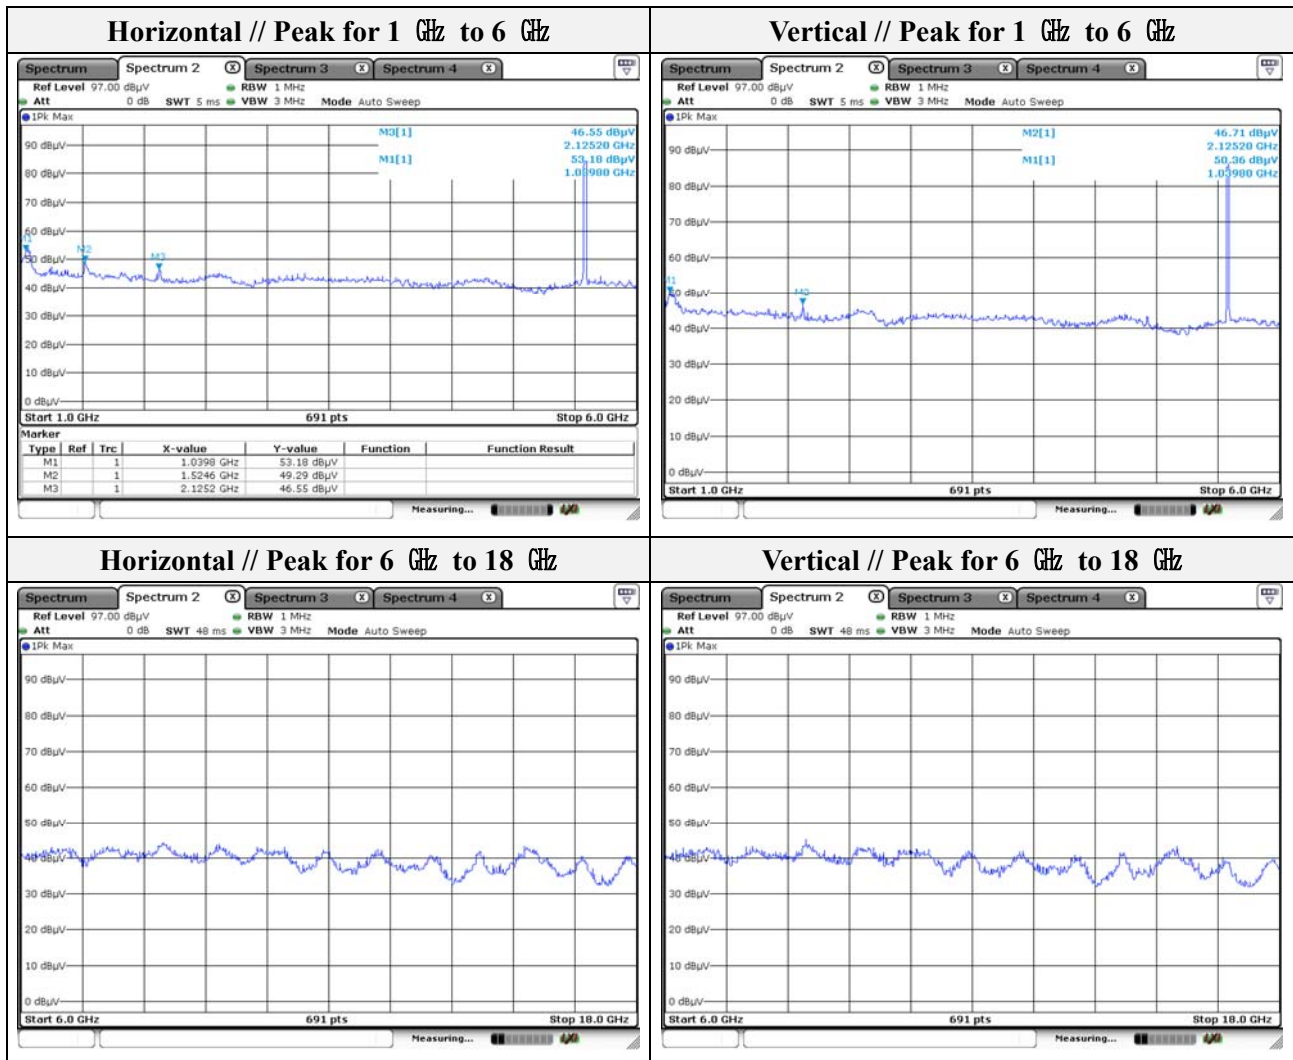

**Note.**

1. No spurious emission were detected above 6 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr


Mode: UNII-2C(VHT20)  
 Distance of measurement: 3 meter  
 Channel: 140

**- Spurious**


| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 068.70        | 53.72        | Peak        | H               | -8.25   | -        | 45.47                   | 74.00          | 28.53       |
| 1 495.70        | 47.67        | Peak        | H               | -5.69   | -        | 41.98                   | 74.00          | 32.02       |
| 2 117.90        | 45.74        | Peak        | H               | -0.69   | -        | 45.05                   | 68.20          | 23.15       |
| 1 061.50        | 56.65        | Peak        | V               | -8.29   | -        | 48.36                   | 74.00          | 25.64       |
| 1 495.70        | 49.39        | Peak        | V               | -5.69   | -        | 43.70                   | 74.00          | 30.30       |
| 2 125.20        | 48.04        | Peak        | V               | -0.67   | -        | 47.37                   | 68.20          | 20.83       |

**- Band edge**

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 5 725.00        | 46.19        | Peak        | H               | 8.77    | -        | 54.96                   | 68.20          | 13.24       |
| 5 756.92        | 45.41        | Peak        | H               | 8.93    | -        | 54.34                   | 68.20          | 13.86       |
| 5 725.00        | 50.50        | Peak        | V               | 8.77    | -        | 59.27                   | 68.20          | 8.93        |
| 5 805.82        | 47.39        | Peak        | V               | 9.15    | -        | 56.54                   | 68.20          | 11.66       |

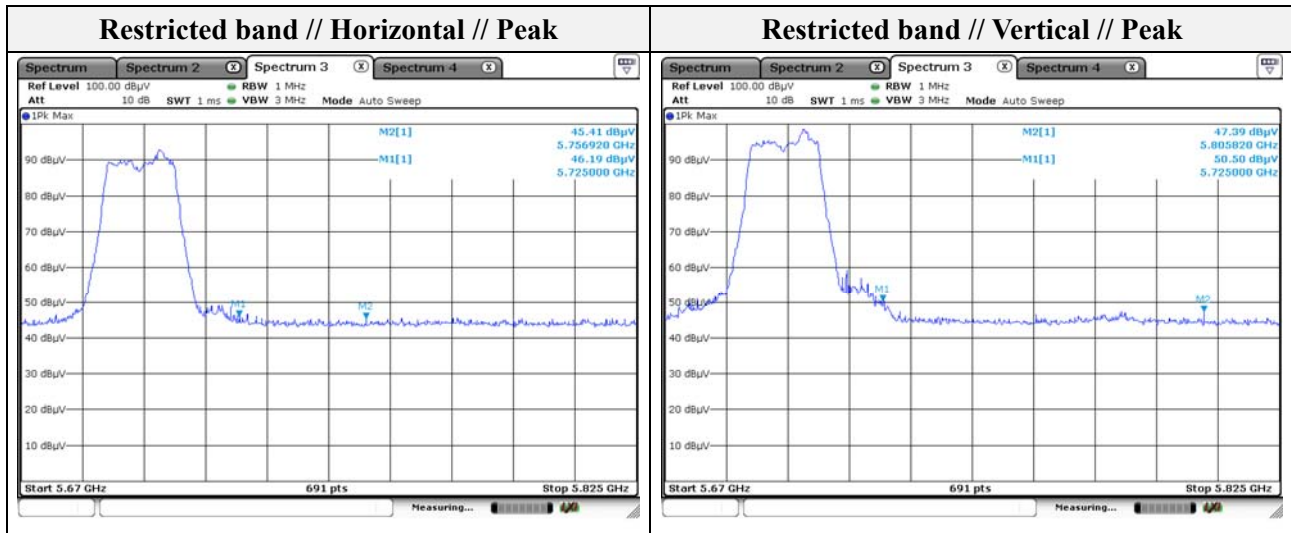

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

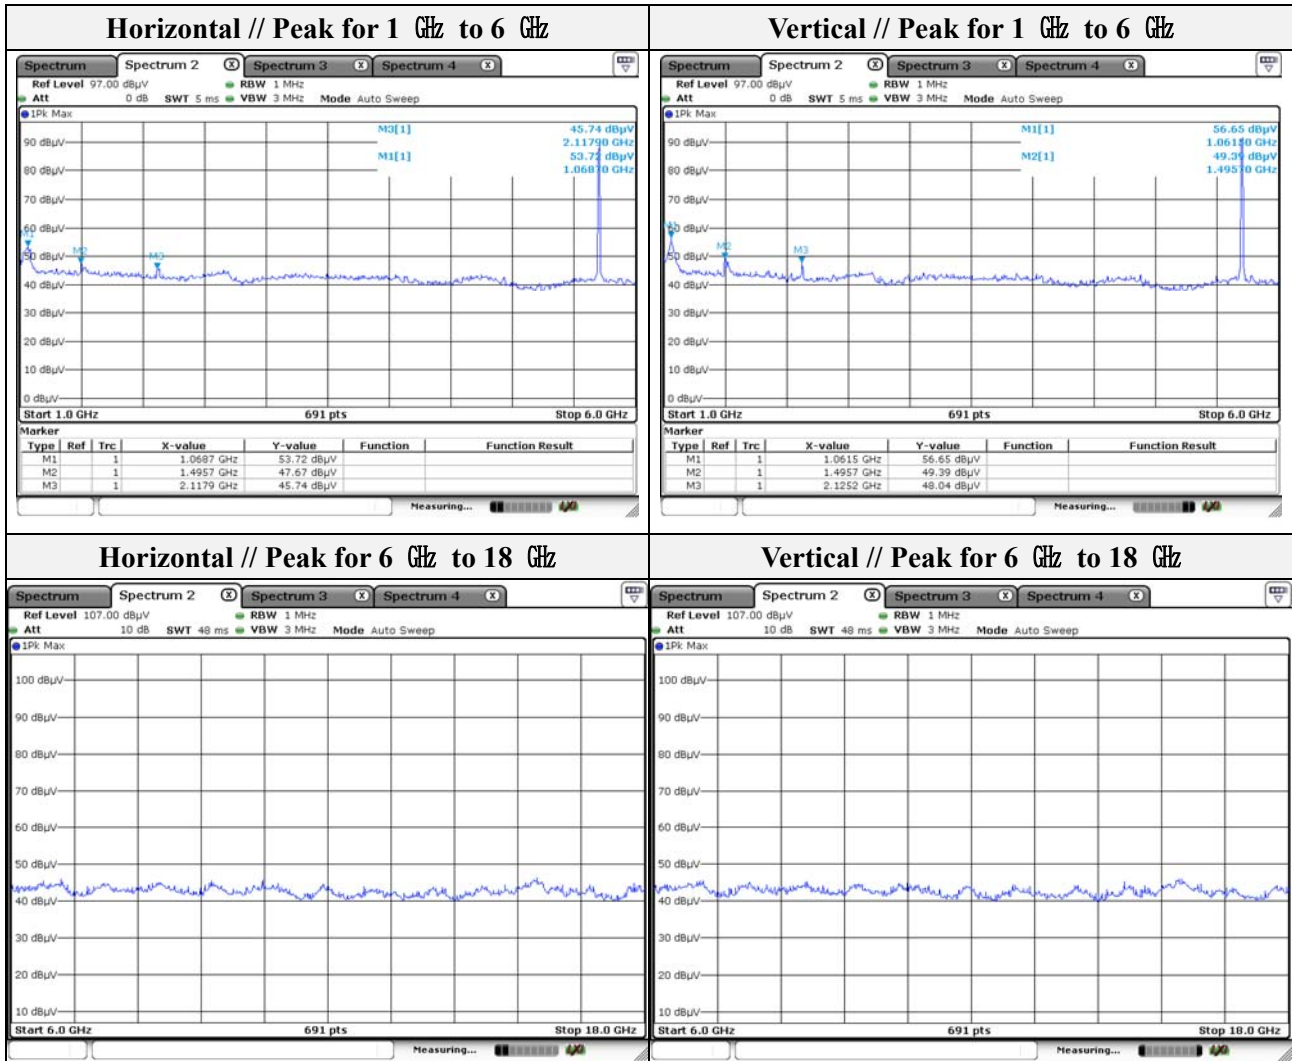

Note.

1. No spurious emission were detected above 6 GHz.


Mode: UNII-2C(VHT20)

Distance of measurement: 3 meter

Channel: 144

**- Spurious**

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1047.00         | 54.57        | Peak        | H               | -8.37   | -        | 46.20                   | 74.00          | 27.80       |
| 1524.60         | 47.53        | Peak        | H               | -5.45   | -        | 42.08                   | 74.00          | 31.92       |
| 2125.20         | 47.96        | Peak        | H               | -0.67   | -        | 47.29                   | 68.20          | 20.91       |
| 1061.50         | 49.25        | Peak        | V               | -8.29   | -        | 40.96                   | 74.00          | 33.04       |
| 1517.40         | 52.77        | Peak        | V               | -5.51   | -        | 47.26                   | 74.00          | 26.74       |
| 2125.20         | 48.12        | Peak        | V               | -0.67   | -        | 47.45                   | 68.20          | 20.75       |

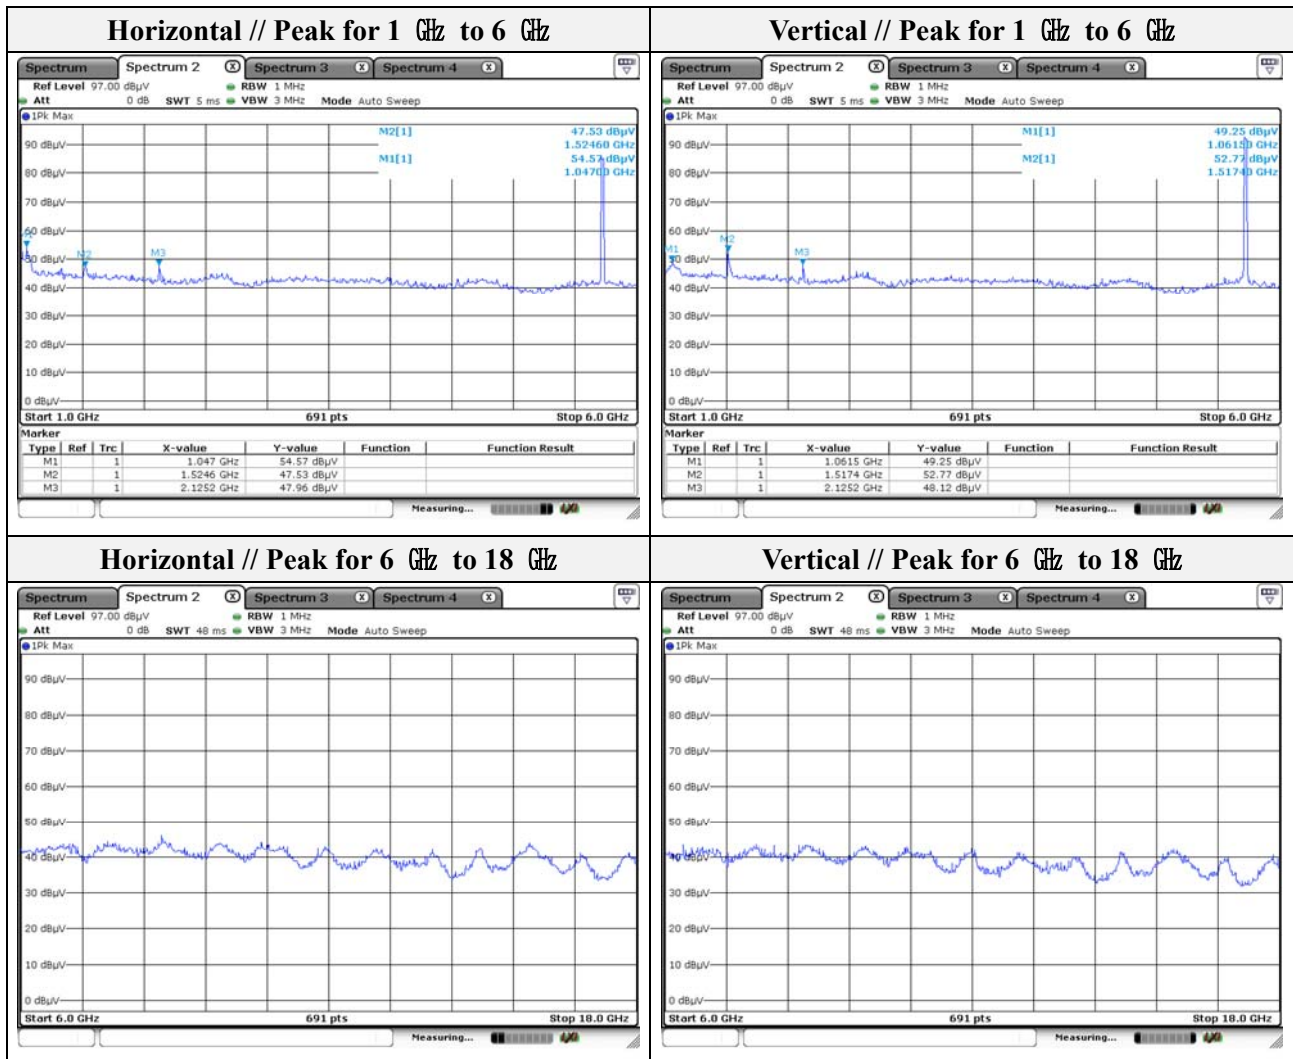

Note.

1. No spurious emission were detected above 6 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr




Mode: UNII-3(VHT20)  
 Distance of measurement: 3 meter  
 Channel: 149

**- Spurious**

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 061.50        | 54.09        | Peak        | H               | -8.29   | -        | 45.80                   | 74.00          | 28.20       |
| 1 517.40        | 48.56        | Peak        | H               | -5.51   | -        | 43.05                   | 74.00          | 30.95       |
| 2 125.20        | 47.87        | Peak        | H               | -0.67   | -        | 47.20                   | 68.20          | 21.00       |
| 1 524.60        | 53.08        | Peak        | V               | -5.45   | -        | 47.63                   | 74.00          | 26.37       |
| 1 850.20        | 51.14        | Peak        | V               | -2.35   | -        | 48.79                   | 68.20          | 19.41       |
| 2 125.20        | 49.37        | Peak        | V               | -0.67   | -        | 48.70                   | 68.20          | 19.50       |


**- Band edge**

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 5 706.54        | 45.05        | Peak        | H               | 8.69    | -        | 53.74                   | 107.03         | 53.29       |
| 5 725.00        | 45.12        | Peak        | H               | 8.77    | -        | 53.89                   | 122.20         | 68.31       |
| 5 709.53        | 47.40        | Peak        | V               | 8.70    | -        | 56.10                   | 107.87         | 51.77       |
| 5 725.00        | 50.60        | Peak        | V               | 8.77    | -        | 59.37                   | 122.20         | 62.83       |

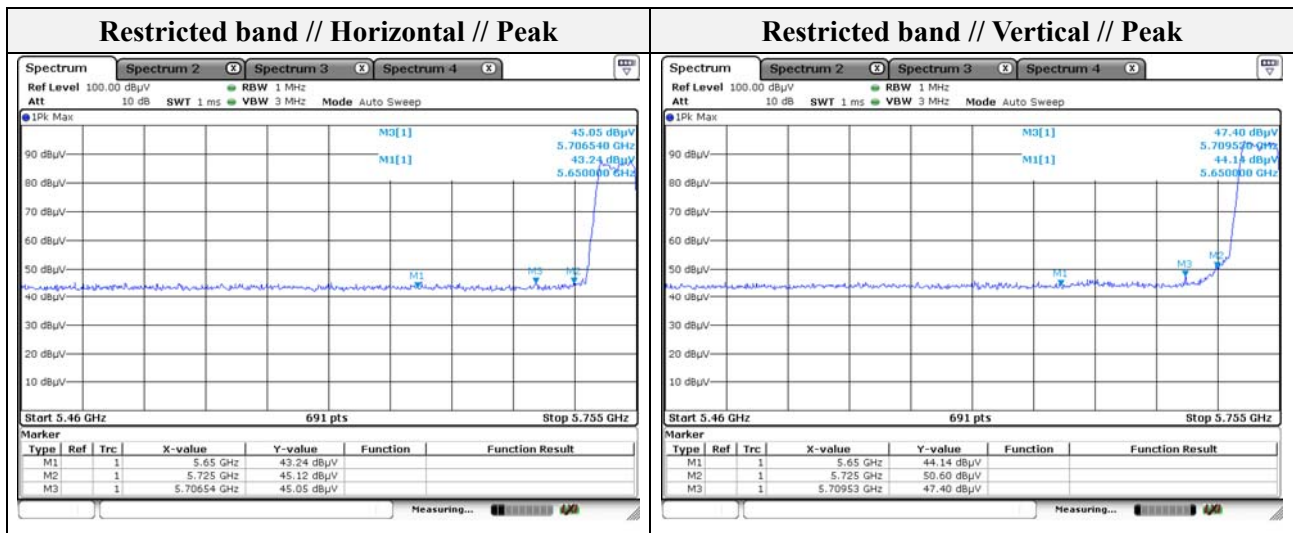

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr



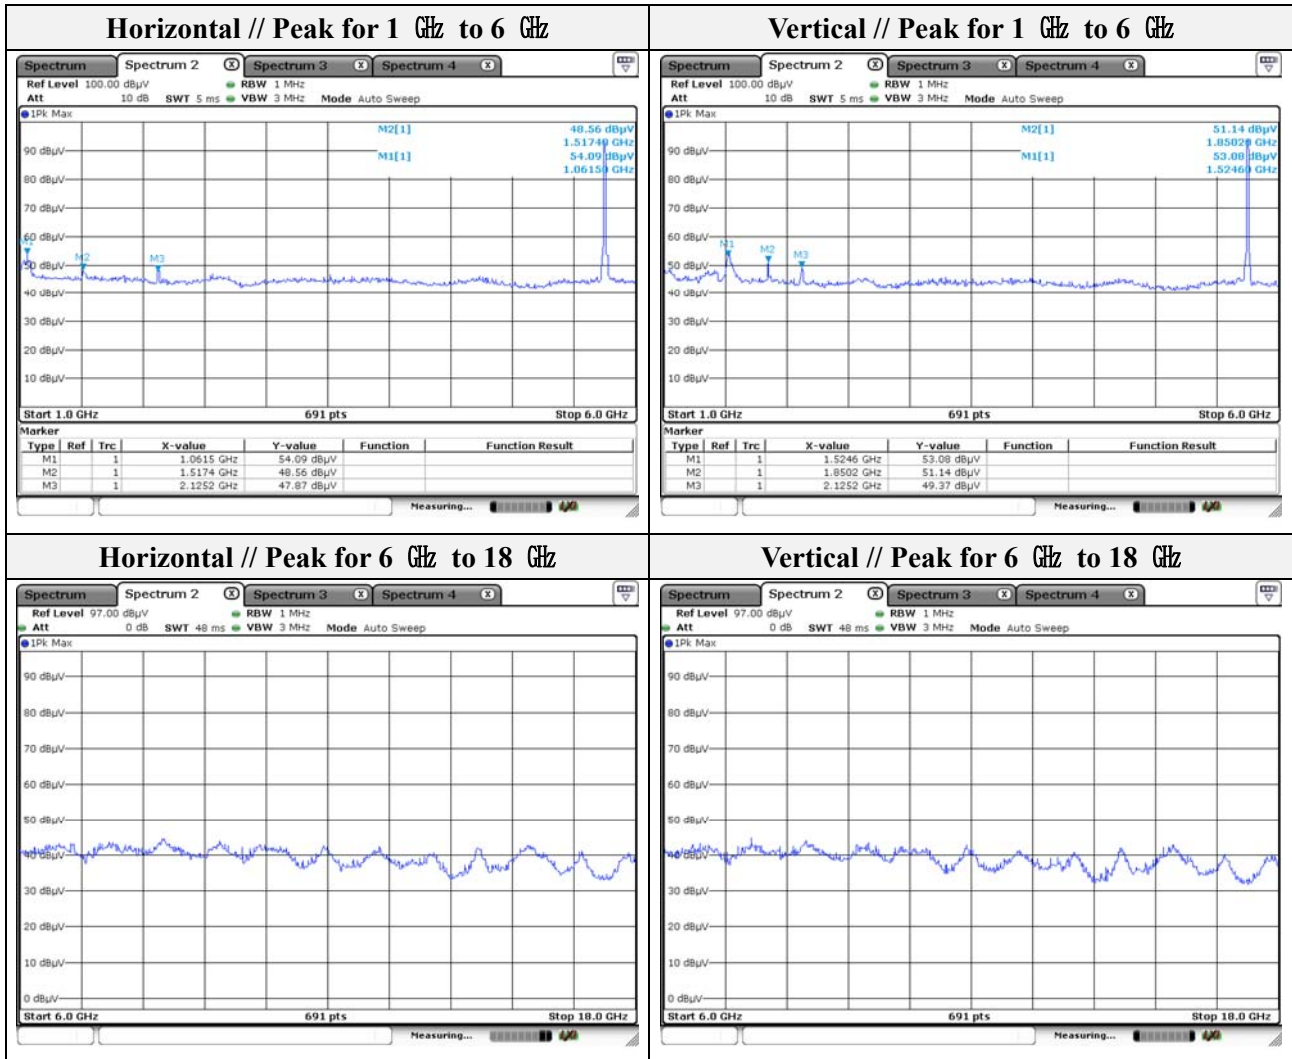

Note.

1. No spurious emission were detected above 6 GHz.


Mode: UNII-3(VHT20)

Distance of measurement: 3 meter

Channel: 157

**- Spurious**

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 054.30        | 48.98        | Peak        | H               | -8.33   | -        | 40.65                   | 74.00          | 33.35       |
| 1 850.20        | 48.38        | Peak        | H               | -2.35   | -        | 46.03                   | 68.20          | 22.17       |
| 2 132.40        | 48.95        | Peak        | H               | -0.66   | -        | 48.29                   | 68.20          | 19.91       |
| 1 010.90        | 49.58        | Peak        | V               | -8.58   | -        | 41.00                   | 74.00          | 33.00       |
| 1 582.50        | 50.18        | Peak        | V               | -4.92   | -        | 45.26                   | 74.00          | 28.74       |
| 2 125.20        | 47.57        | Peak        | V               | -0.67   | -        | 46.90                   | 68.20          | 21.30       |

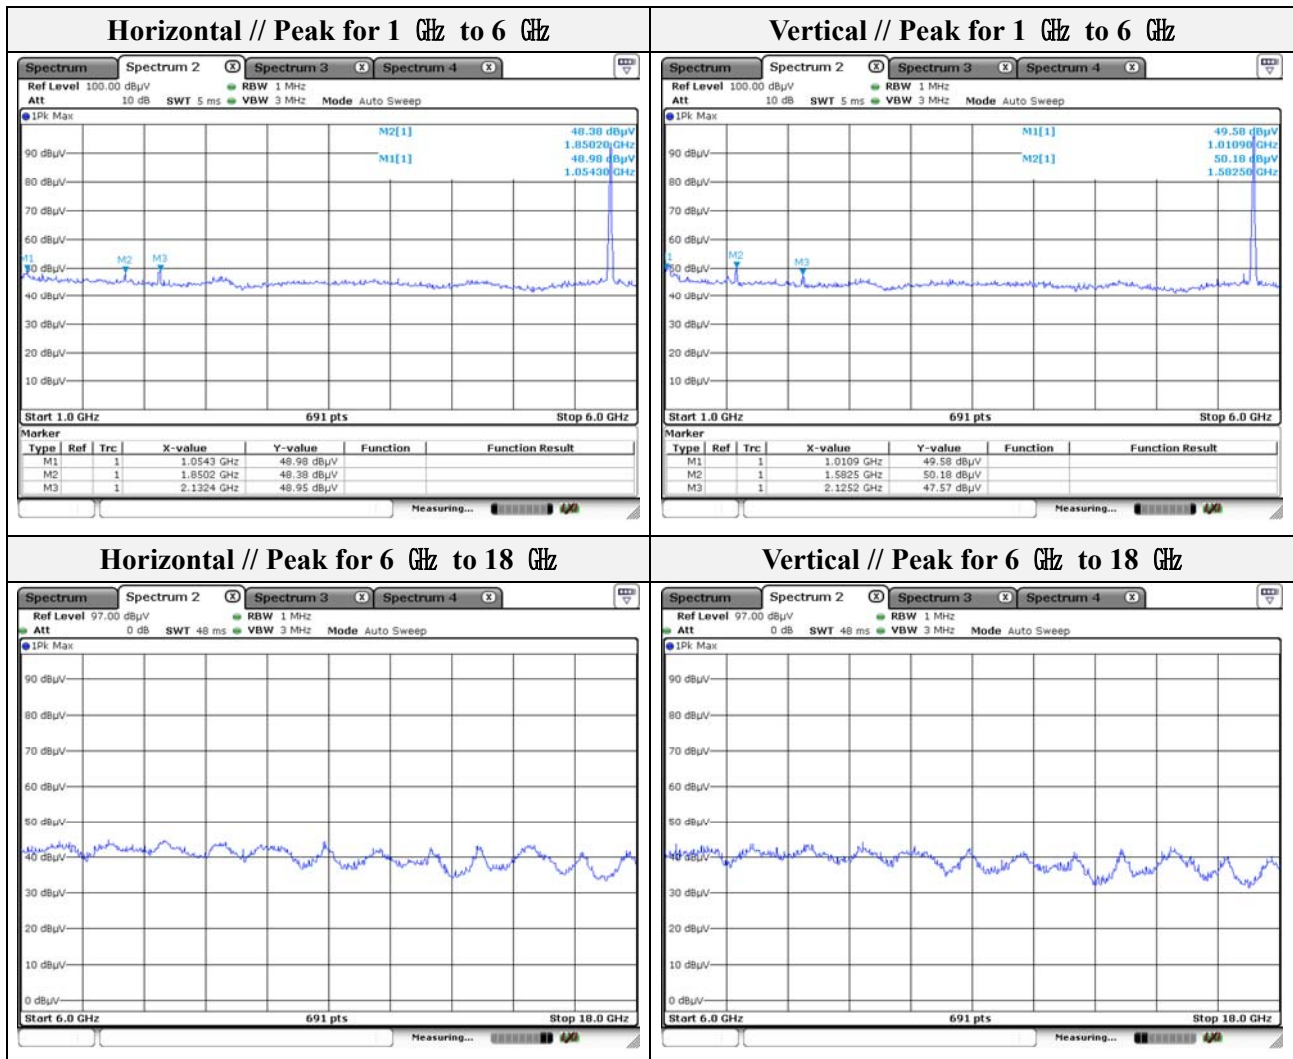

Note.

1. No spurious emission were detected above 6 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr


Mode: UNII-3(VHT20)  
 Distance of measurement: 3 meter  
 Channel: 165

**- Spurious**


| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 061.50        | 51.04        | Peak        | H               | -8.29   | -        | 42.75                   | 74.00          | 31.25       |
| 1 517.40        | 48.51        | Peak        | H               | -5.51   | -        | 43.00                   | 74.00          | 31.00       |
| 2 125.20        | 49.54        | Peak        | H               | -0.67   | -        | 48.87                   | 68.20          | 19.33       |
| 1 054.30        | 51.27        | Peak        | V               | -8.33   | -        | 42.94                   | 74.00          | 31.06       |
| 1 531.80        | 51.20        | Peak        | V               | -5.38   | -        | 45.82                   | 74.00          | 28.18       |
| 2 117.90        | 49.26        | Peak        | V               | -0.69   | -        | 48.57                   | 68.20          | 19.63       |

**- Band edge**

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 5 850.00        | 57.43        | Peak        | H               | 9.32    | -        | 66.75                   | 122.20         | 55.45       |
| 5 861.15        | 53.91        | Peak        | H               | 9.36    | -        | 63.27                   | 109.08         | 45.81       |
| 5 850.00        | 66.23        | Peak        | V               | 9.32    | -        | 75.55                   | 122.20         | 46.65       |
| 5 856.20        | 60.91        | Peak        | V               | 9.34    | -        | 70.25                   | 110.46         | 40.21       |

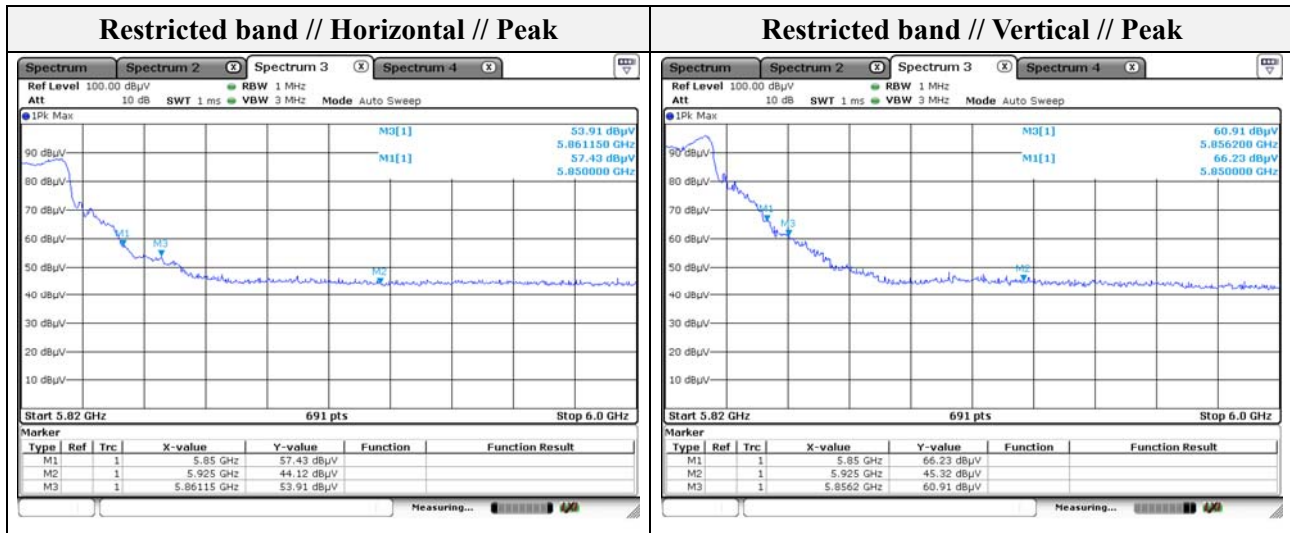

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

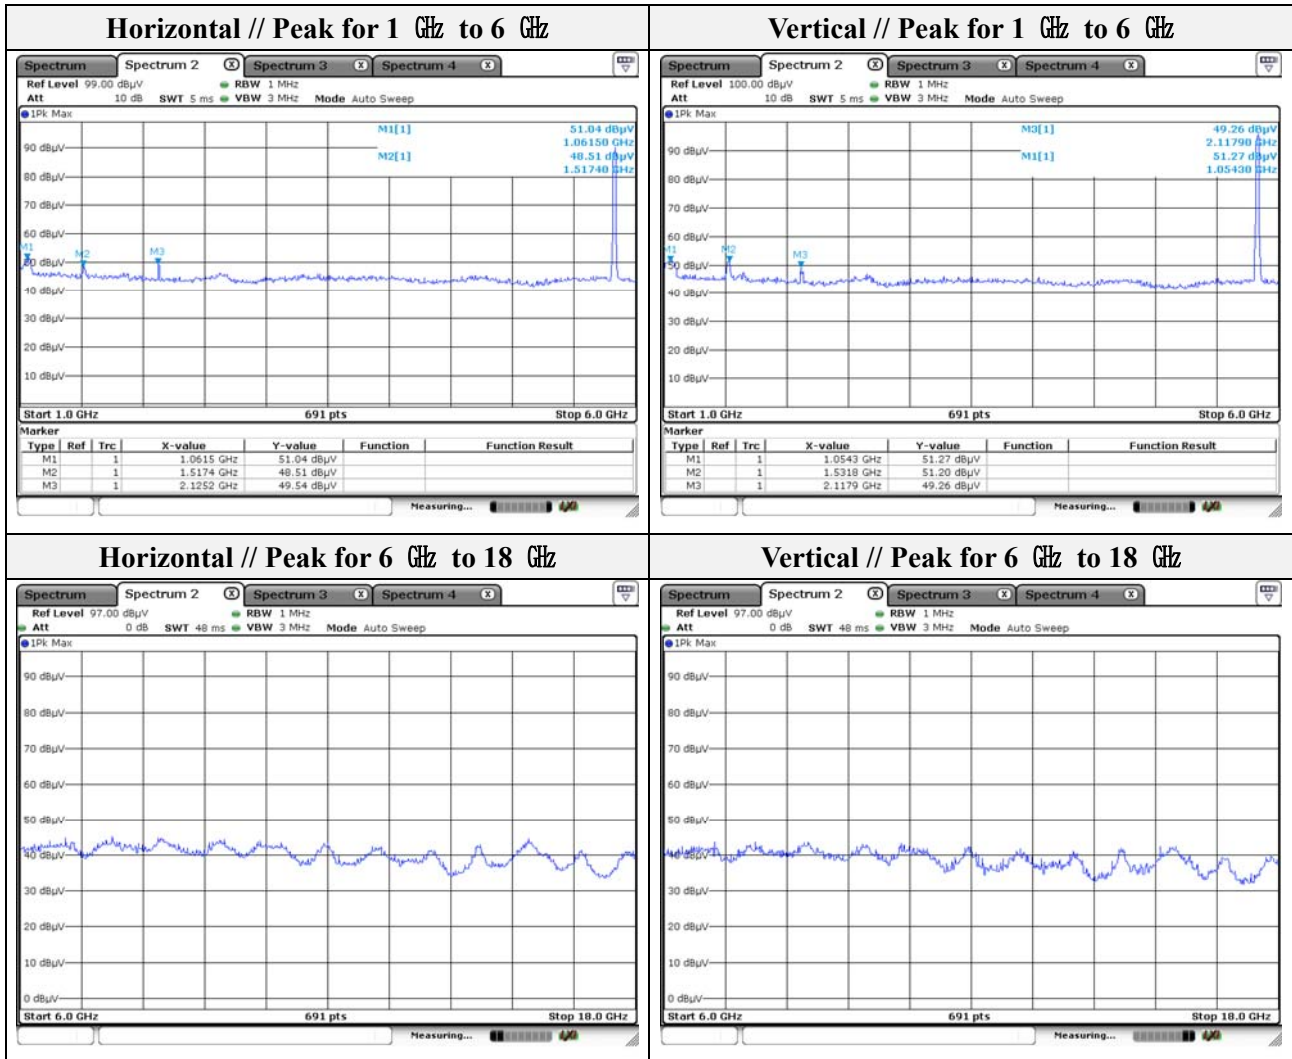

Note.

1. No spurious emission were detected above 6 GHz.

Mode: UNII-1(VHT40)  
 Distance of measurement: 3 meter  
 Channel: 38


**- Spurious**

| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 1 076.00        | 52.32              | Peak        | H               | -8.21   | -        | 44.11                         | 74.00                | 29.89       |
| 1 531.80        | 48.27              | Peak        | H               | -5.38   | -        | 42.89                         | 74.00                | 31.11       |
| 1 835.70        | 48.88              | Peak        | H               | -2.48   | -        | 46.40                         | 68.20                | 21.80       |
| 1 039.80        | 52.31              | Peak        | V               | -8.42   | -        | 43.89                         | 74.00                | 30.11       |
| 1 517.40        | 49.83              | Peak        | V               | -5.51   | -        | 44.32                         | 74.00                | 29.68       |
| 1 850.20        | 50.88              | Peak        | V               | -2.35   | -        | 48.53                         | 68.20                | 19.67       |

**- Band edge**

| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 4 755.00        | 45.92              | Peak        | H               | 6.62    | -        | 52.54                         | 74.00                | 21.46       |
| 4 729.80        | 45.21              | Peak        | V               | 6.43    | -        | 51.64                         | 74.00                | 22.36       |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

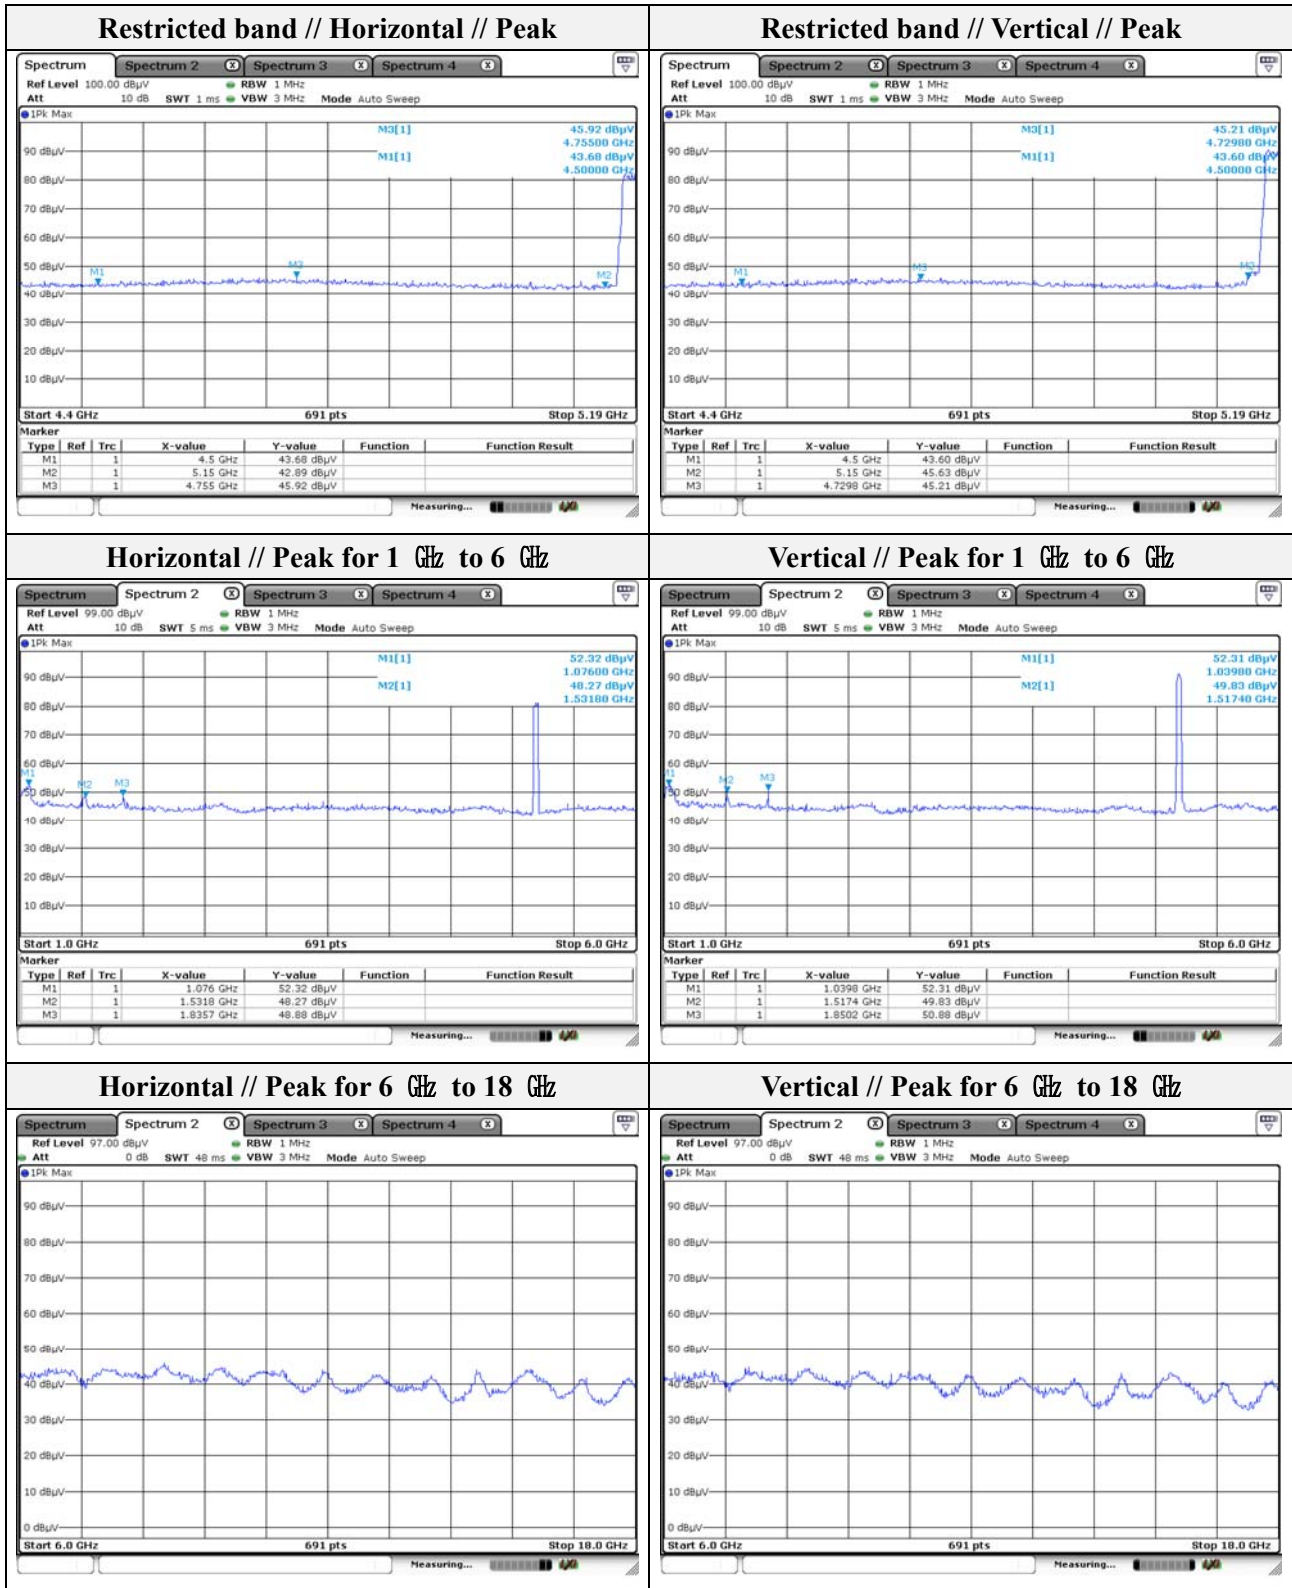

Note.

1. No spurious emission were detected above 6 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr


Mode: UNII-1(VHT40)

Distance of measurement: 3 meter

Channel: 46

**- Spurious**

| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 1 054.30        | 53.76              | Peak        | H               | -8.33   | -        | 45.43                         | 74.00                | 28.57       |
| 1 517.40        | 49.53              | Peak        | H               | -5.51   | -        | 44.02                         | 74.00                | 29.98       |
| 2 117.90        | 49.55              | Peak        | H               | -0.69   | -        | 48.86                         | 68.20                | 19.34       |
| 1 054.30        | 54.70              | Peak        | V               | -8.33   | -        | 46.37                         | 74.00                | 27.63       |
| 1 517.40        | 49.47              | Peak        | V               | -5.51   | -        | 43.96                         | 74.00                | 30.04       |
| 2 117.90        | 48.00              | Peak        | V               | -0.69   | -        | 47.31                         | 68.20                | 20.89       |

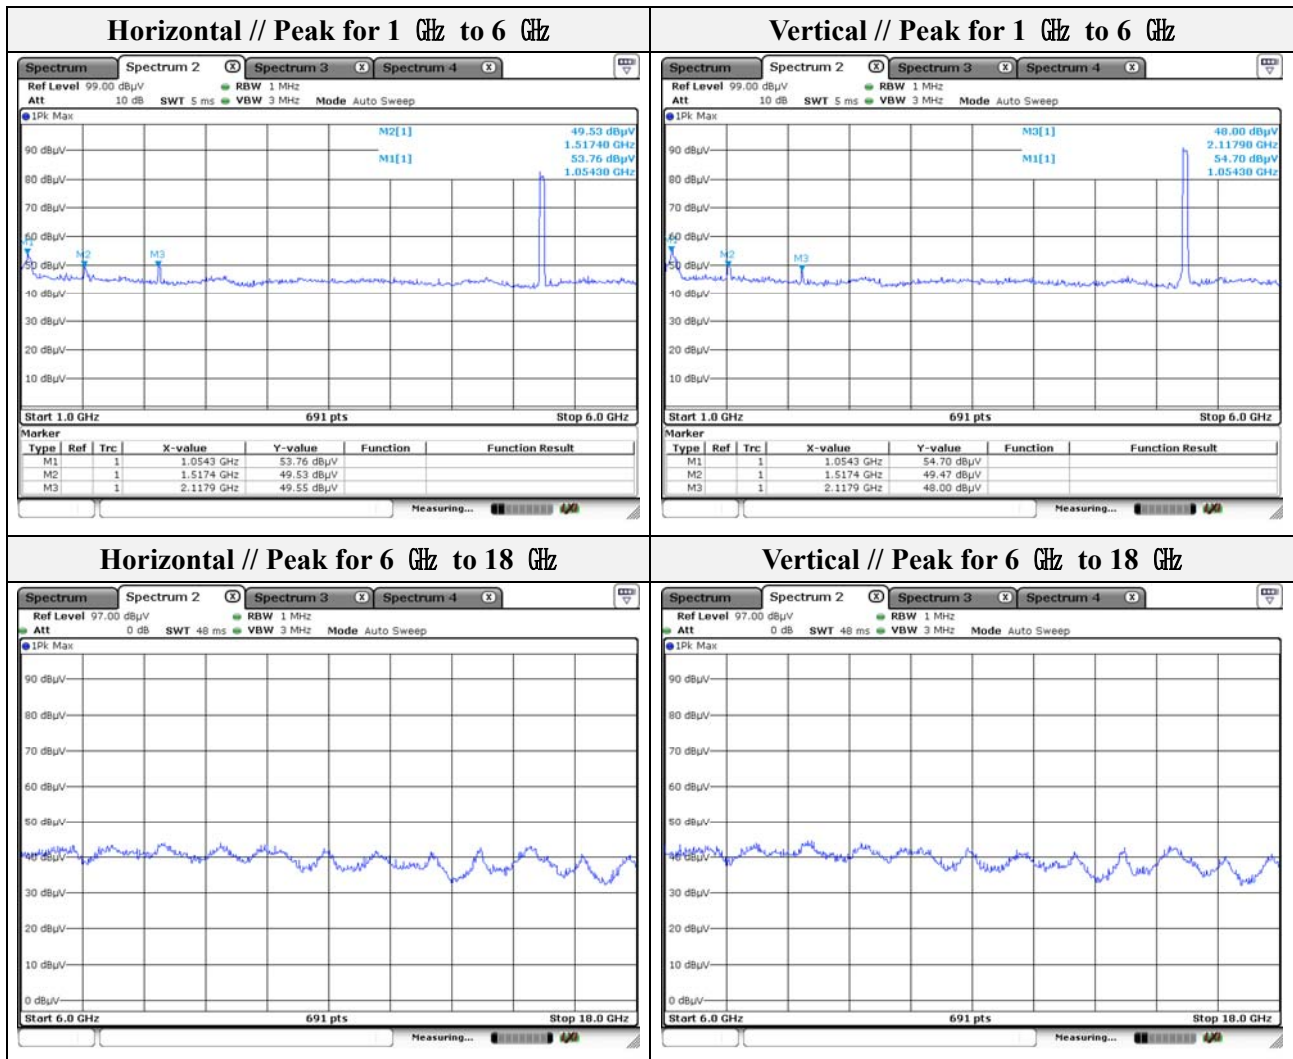

Note.

1. No spurious emission were detected above 6 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr


Mode: UNII-2A(VHT40)

Distance of measurement: 3 meter

Channel: 54

**- Spurious**

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 054.30        | 54.05        | Peak        | H               | -8.33   | -        | 45.72                   | 74.00          | 28.28       |
| 1 517.40        | 48.53        | Peak        | H               | -5.51   | -        | 43.02                   | 74.00          | 30.98       |
| 2 132.40        | 49.60        | Peak        | H               | -0.66   | -        | 48.94                   | 68.20          | 19.26       |
| 1 054.30        | 54.84        | Peak        | V               | -8.33   | -        | 46.51                   | 74.00          | 27.49       |
| 1 524.60        | 52.99        | Peak        | V               | -5.45   | -        | 47.54                   | 74.00          | 26.46       |
| 1 850.20        | 49.73        | Peak        | V               | -2.35   | -        | 47.38                   | 68.20          | 20.82       |

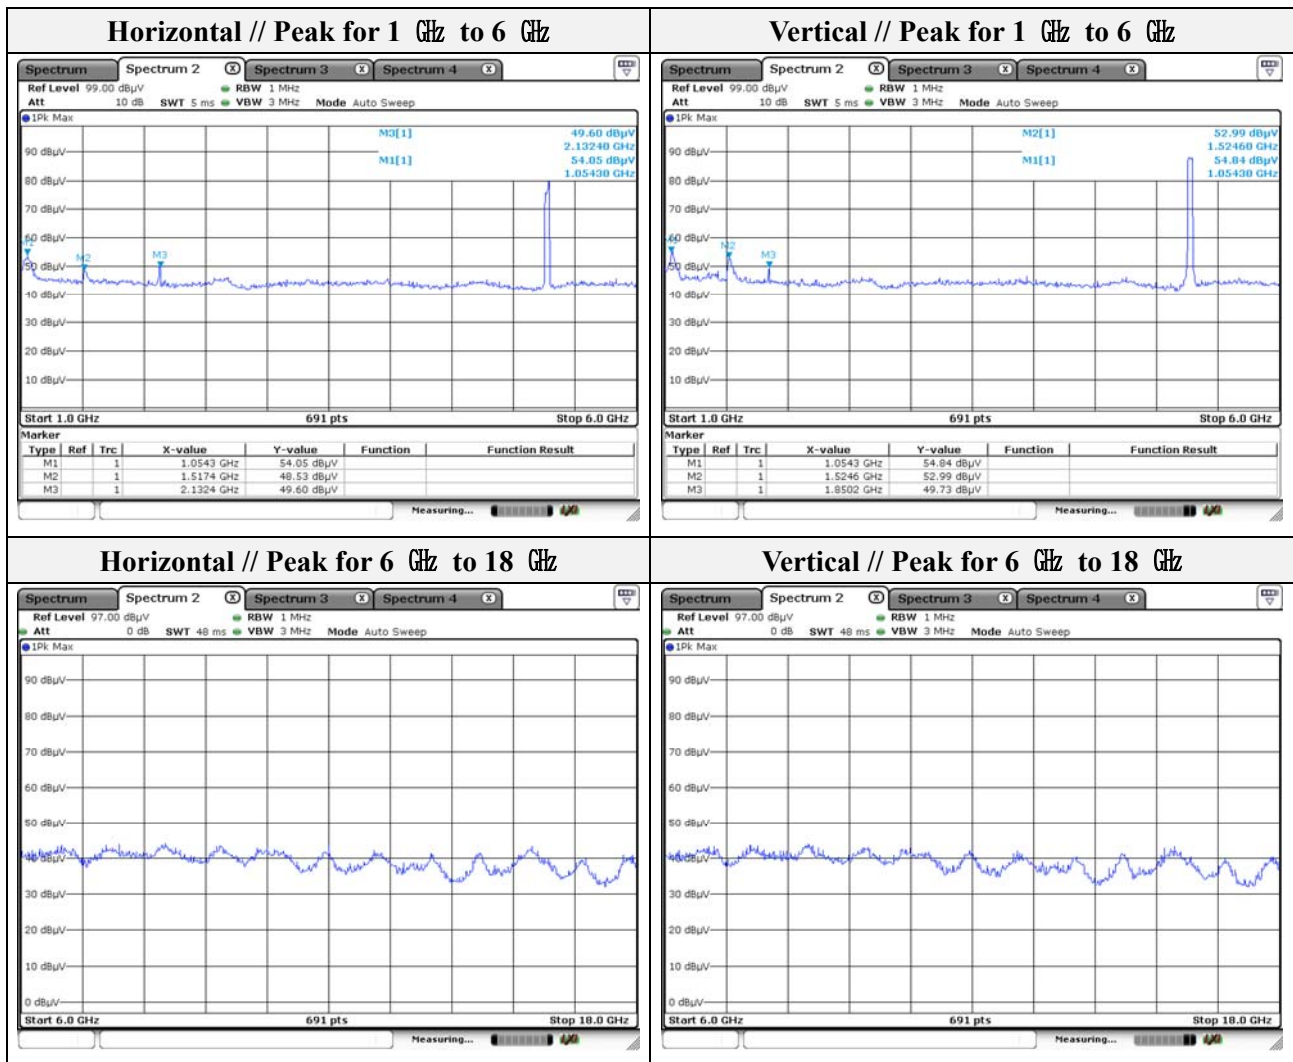

Note.

1. No spurious emission were detected above 6 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr





**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-19T0015  
Page (81) of (110)

Mode: UNII-2A(VHT40)  
Distance of measurement: 3 meter  
Channel: 62


**- Spurious**

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 047.00        | 53.53        | Peak        | H               | -8.37   | -        | 45.16                   | 74.00          | 28.84       |
| 1 531.80        | 49.32        | Peak        | H               | -5.38   | -        | 43.94                   | 74.00          | 30.06       |
| 2 117.90        | 46.73        | Peak        | H               | -0.69   | -        | 46.04                   | 68.20          | 22.16       |
| 1 054.30        | 54.00        | Peak        | V               | -8.33   | -        | 45.67                   | 74.00          | 28.33       |
| 1 517.40        | 51.43        | Peak        | V               | -5.51   | -        | 45.92                   | 74.00          | 28.08       |
| 2 125.20        | 48.50        | Peak        | V               | -0.67   | -        | 47.83                   | 68.20          | 20.37       |


**- Band edge**

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 5 377.03        | 46.00        | Peak        | H               | 7.91    | -        | 53.91                   | 74.00          | 20.09       |
| 5 350.00        | 46.31        | Peak        | V               | 7.95    | -        | 54.26                   | 74.00          | 19.74       |
| 5 352.49        | 48.51        | Peak        | V               | 7.94    | -        | 56.45                   | 74.00          | 17.55       |
| 5 350.00        | 33.64        | Average     | V               | 7.95    | 3.42     | 45.01                   | 54.00          | 8.99        |
| 5 387.22        | 33.88        | Average     | V               | 7.90    | 3.42     | 45.20                   | 54.00          | 8.80        |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

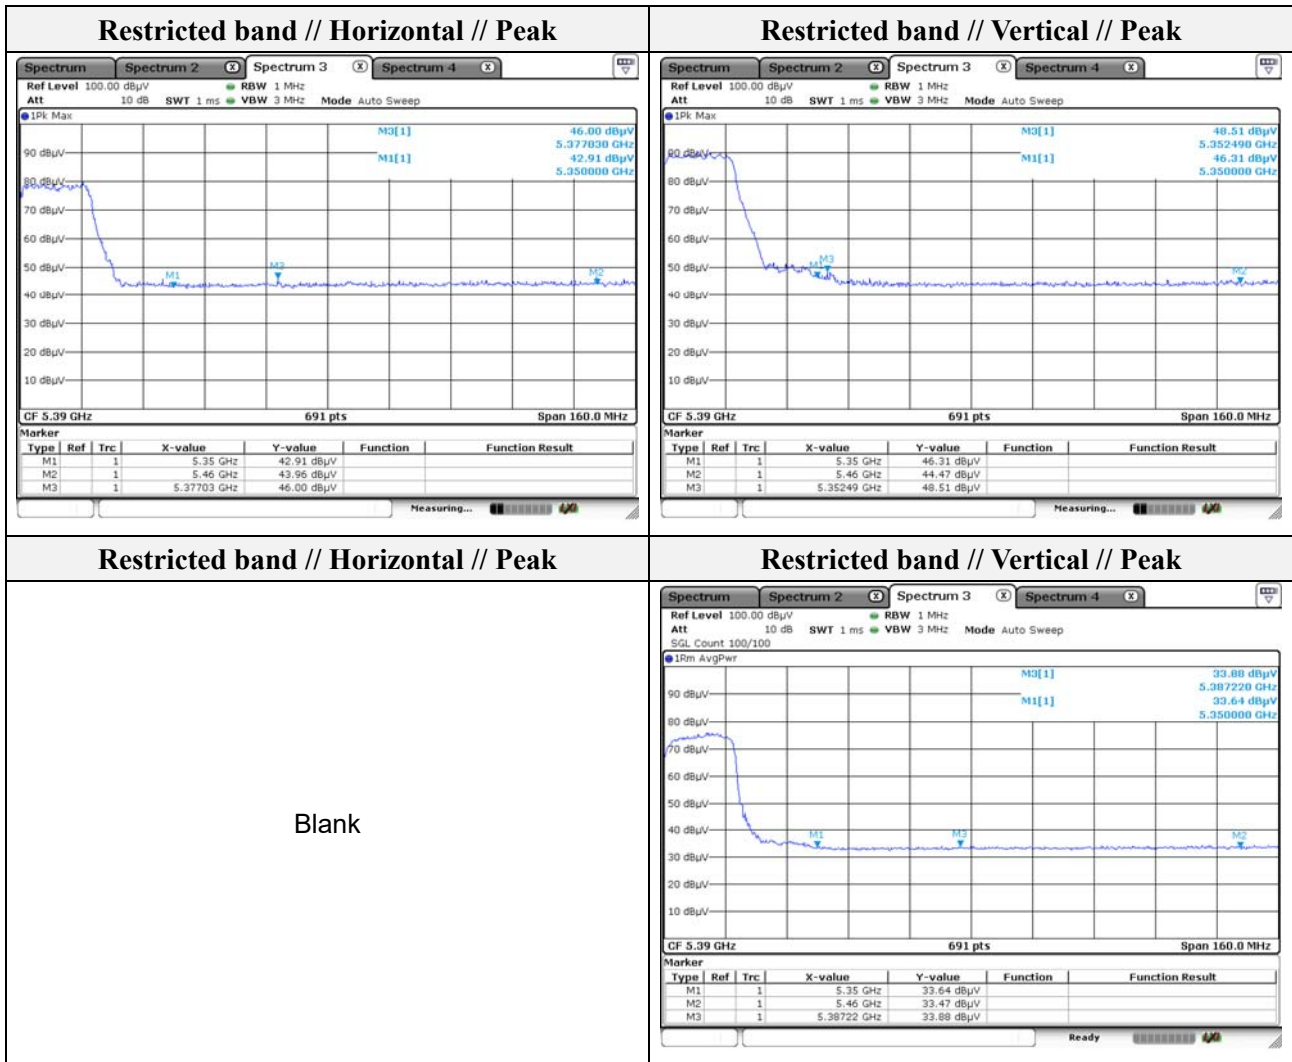

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

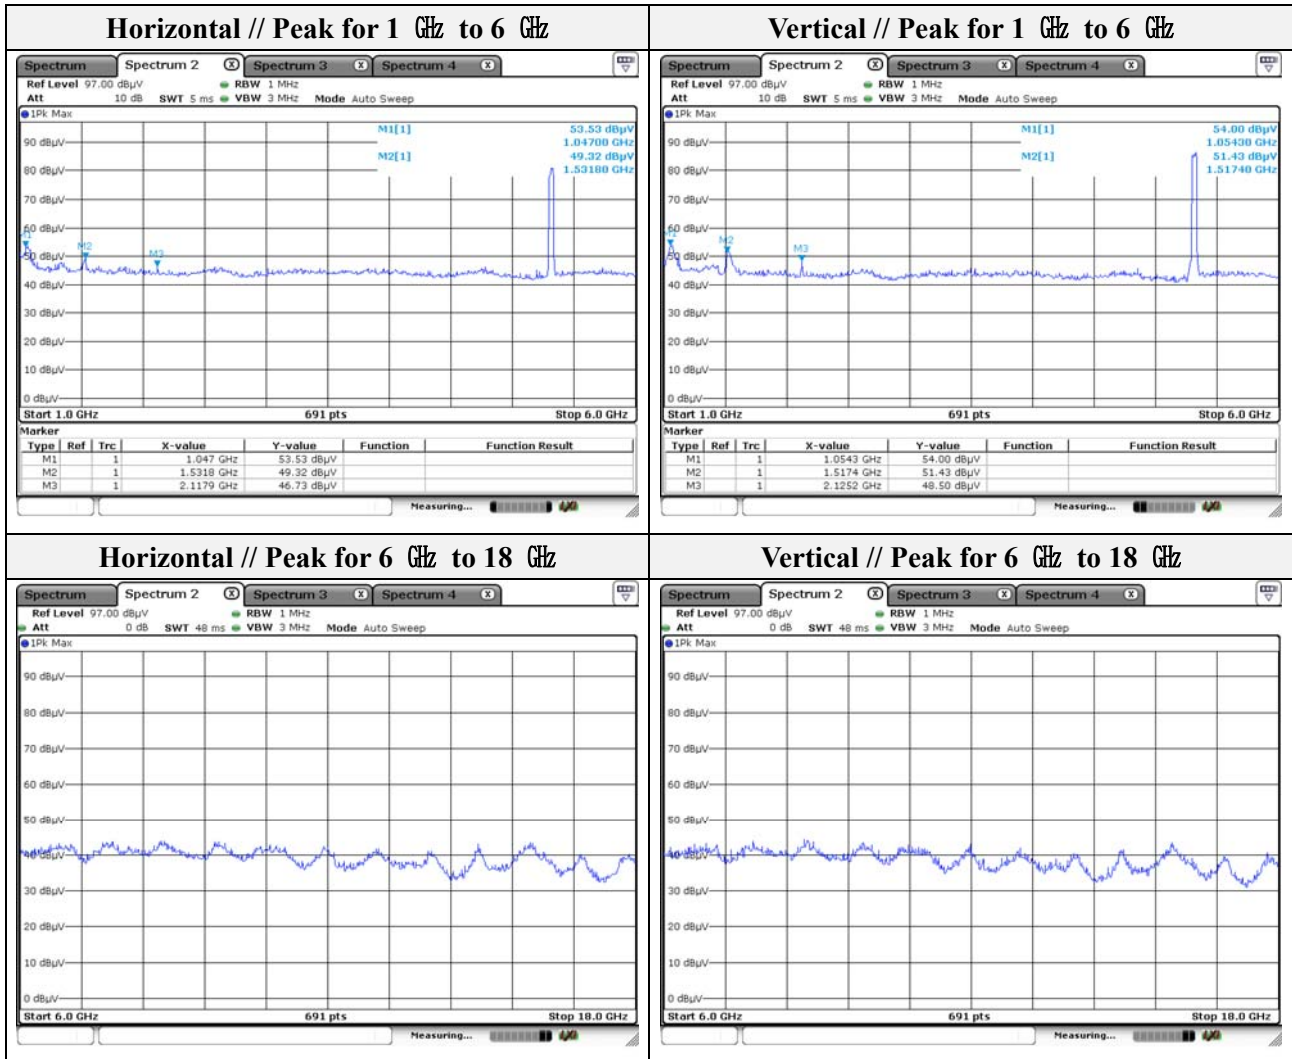

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-19T0015  
Page (84) of (110)

Mode: UNII-2C(VHT40)  
Distance of measurement: 3 meter  
Channel: 102


- **Spurious**

| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 1 061.50        | 53.79              | Peak        | H               | -8.29   | -        | 44.44                         | 74.00                | 29.56       |
| 1 531.80        | 47.75              | Peak        | H               | -5.38   | -        | 44.28                         | 74.00                | 29.72       |
| 1 054.30        | 53.17              | Peak        | V               | -8.33   | -        | 45.50                         | 74.00                | 28.50       |
| 1 531.80        | 50.06              | Peak        | V               | -5.38   | -        | 42.37                         | 74.00                | 31.63       |
| 2 125.20        | 47.51              | Peak        | V               | -0.67   | -        | 44.84                         | 68.20                | 23.36       |

- **Band edge**

| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 5 447.39        | 46.02              | Peak        | H               | 7.83    | -        | 53.85                         | 74.00                | 20.15       |
| 5 451.82        | 45.92              | Peak        | V               | 7.82    | -        | 53.74                         | 74.00                | 20.26       |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

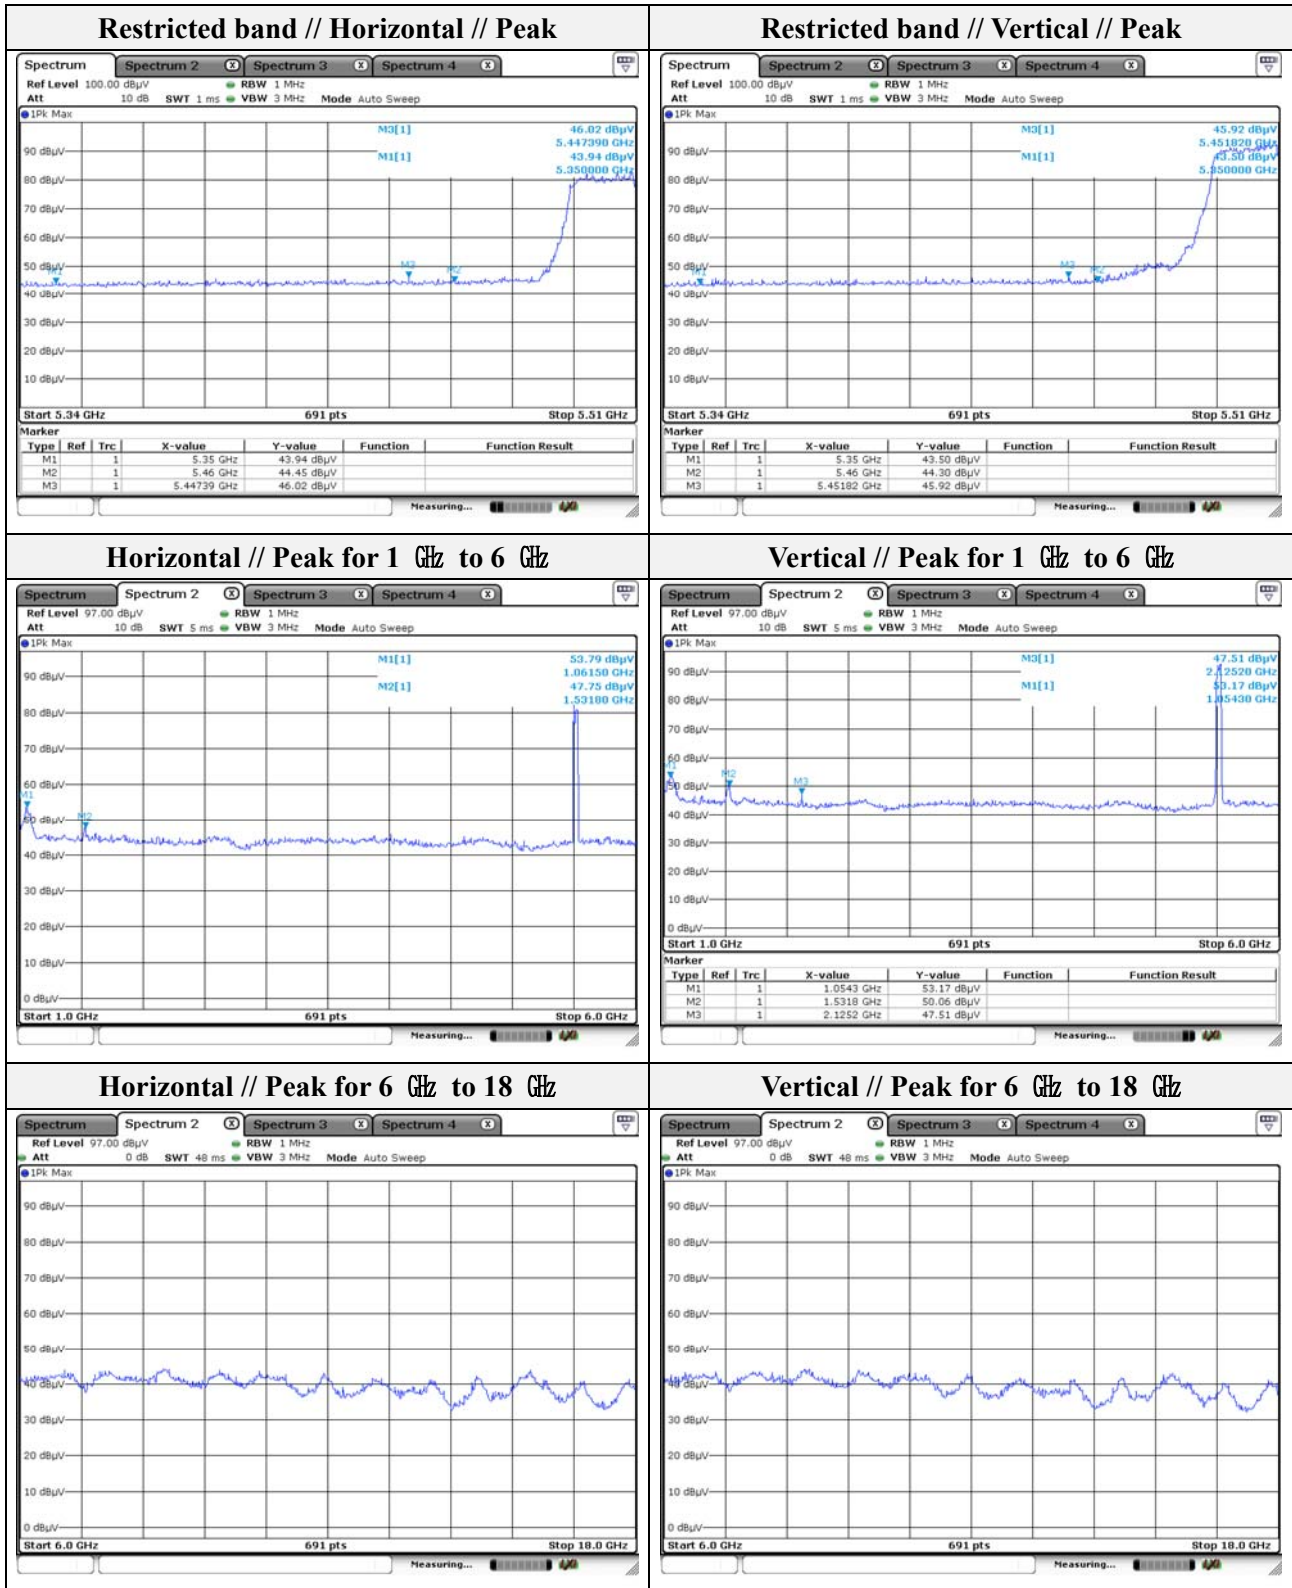

Note.


1. No spurious emission were detected above 6 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

Mode: UNII-2C(VHT40)  
 Distance of measurement: 3 meter  
 Channel: 118

**- Spurious**

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 061.50        | 52.97        | Peak        | H               | -8.29   | -        | 44.68                   | 74.00          | 29.32       |
| 1 531.80        | 50.29        | Peak        | H               | -5.38   | -        | 44.91                   | 74.00          | 29.09       |
| 1 061.50        | 54.83        | Peak        | V               | -8.29   | -        | 46.54                   | 74.00          | 27.46       |
| 1 531.80        | 52.15        | Peak        | V               | -5.38   | -        | 46.77                   | 74.00          | 27.23       |
| 1 850.20        | 48.27        | Peak        | V               | -2.35   | -        | 45.92                   | 68.20          | 22.28       |

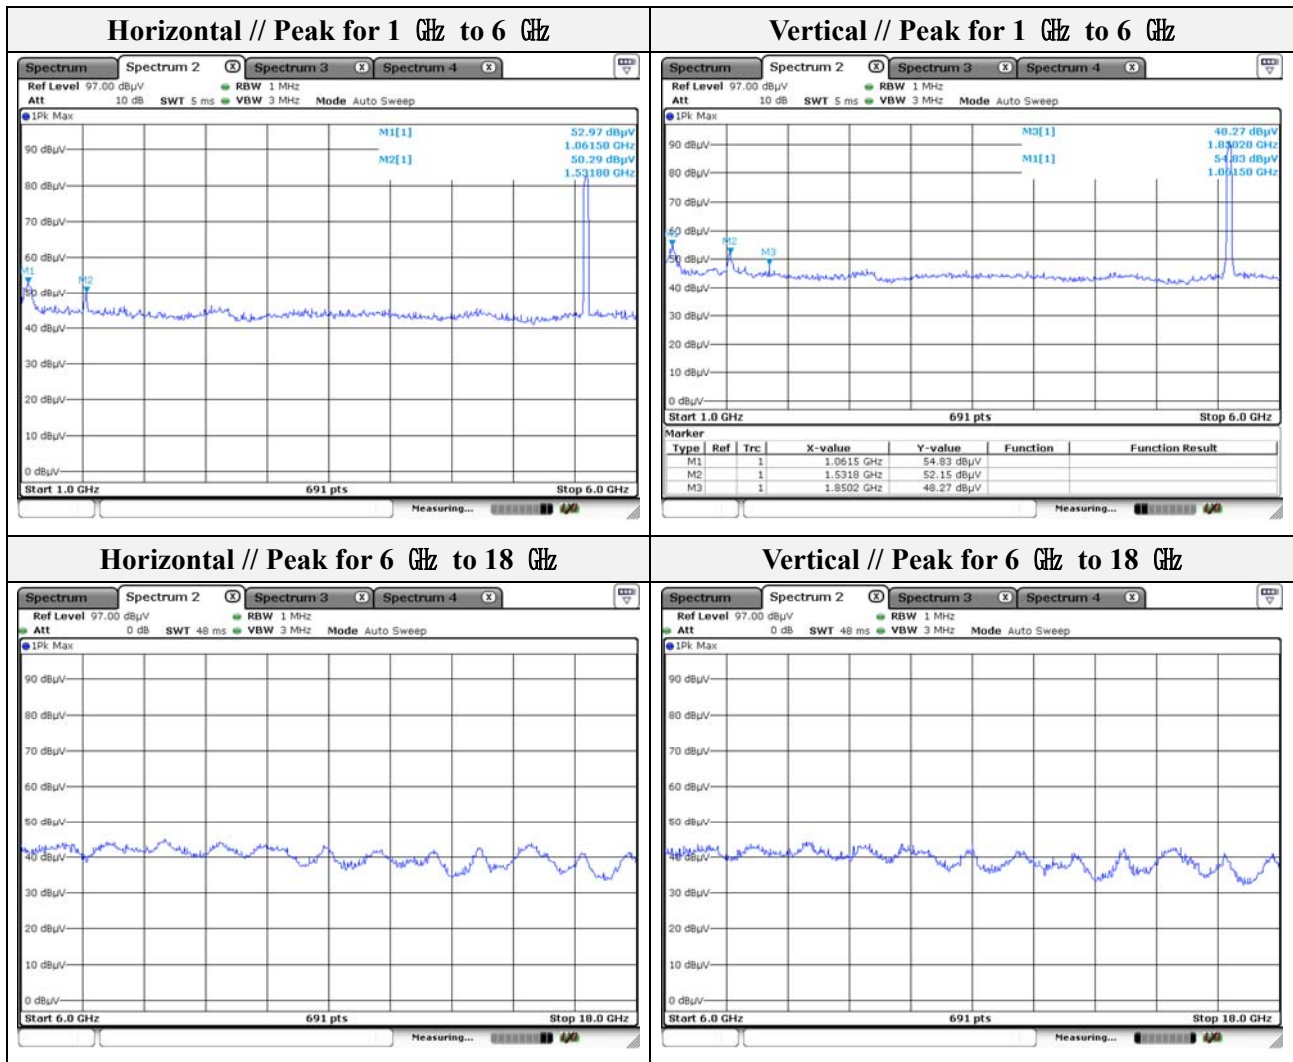

**Note.**

1. No spurious emission were detected above 6 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-19T0015  
Page (87) of (110)

Mode: UNII-2C(VHT40)  
Distance of measurement: 3 meter  
Channel: 134


- **Spurious**

| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 1 061.50        | 53.87              | Peak        | H               | -8.29   | -        | 45.58                         | 74.00                | 28.42       |
| 1 054.30        | 52.92              | Peak        | V               | -8.33   | -        | 44.59                         | 74.00                | 29.41       |
| 1 524.60        | 50.58              | Peak        | V               | -5.45   | -        | 45.13                         | 74.00                | 28.87       |

- **Band edge**

| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 5 727.90        | 46.75              | Peak        | H               | 8.79    | -        | 55.54                         | 68.20                | 12.66       |
| 5 763.00        | 45.86              | Peak        | V               | 8.95    | -        | 54.81                         | 68.20                | 13.39       |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

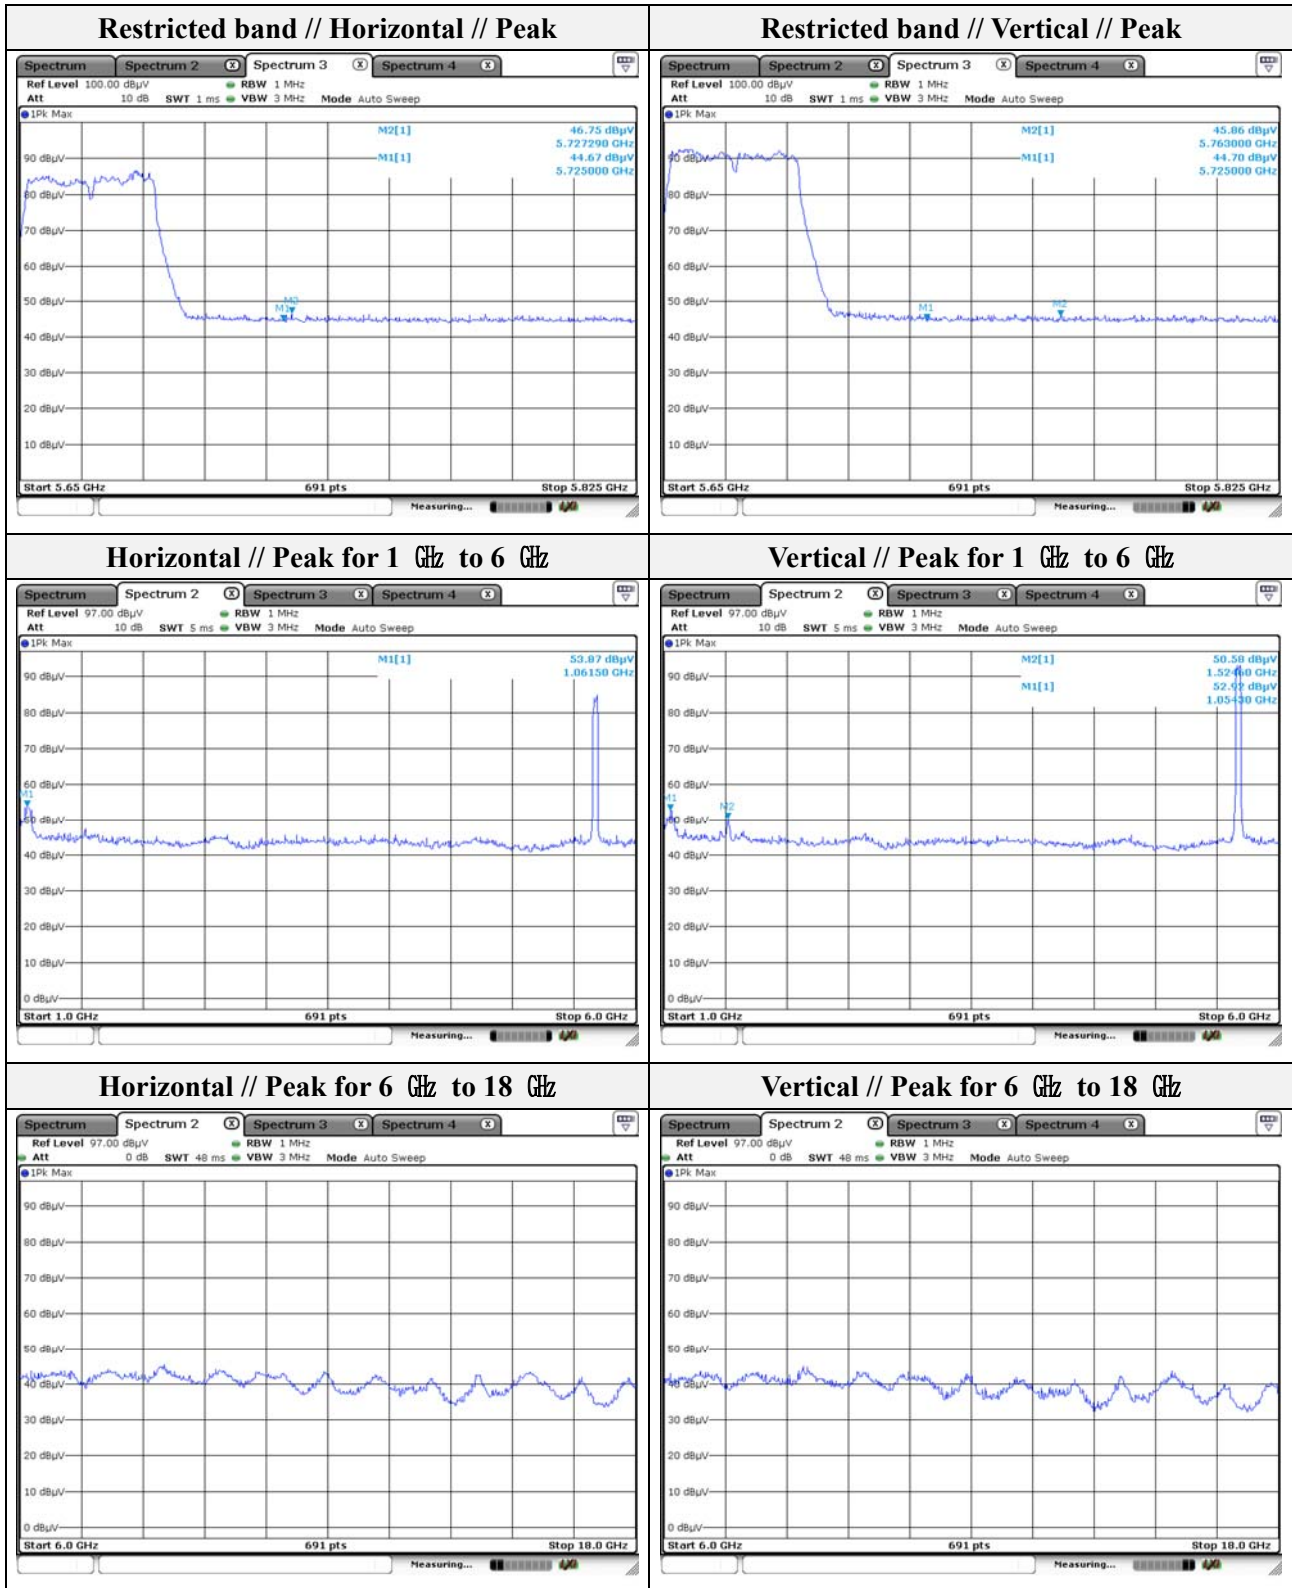

Note.

1. No spurious emission were detected above 6 GHz.


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr



Mode: UNII-2C(VHT40)  
 Distance of measurement: 3 meter  
 Channel: 142

- **Spurious**

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 856.40        | 45.88        | Peak        | H               | -2.29   | -        | 43.59                   | 68.20          | 24.61       |
| 1 061.50        | 54.16        | Peak        | V               | -8.29   | -        | 45.87                   | 74.00          | 28.13       |
| 1 524.60        | 54.37        | Peak        | V               | -5.45   | -        | 48.92                   | 74.00          | 25.08       |
| 1 850.20        | 48.52        | Peak        | V               | -2.35   | -        | 46.17                   | 68.20          | 22.03       |

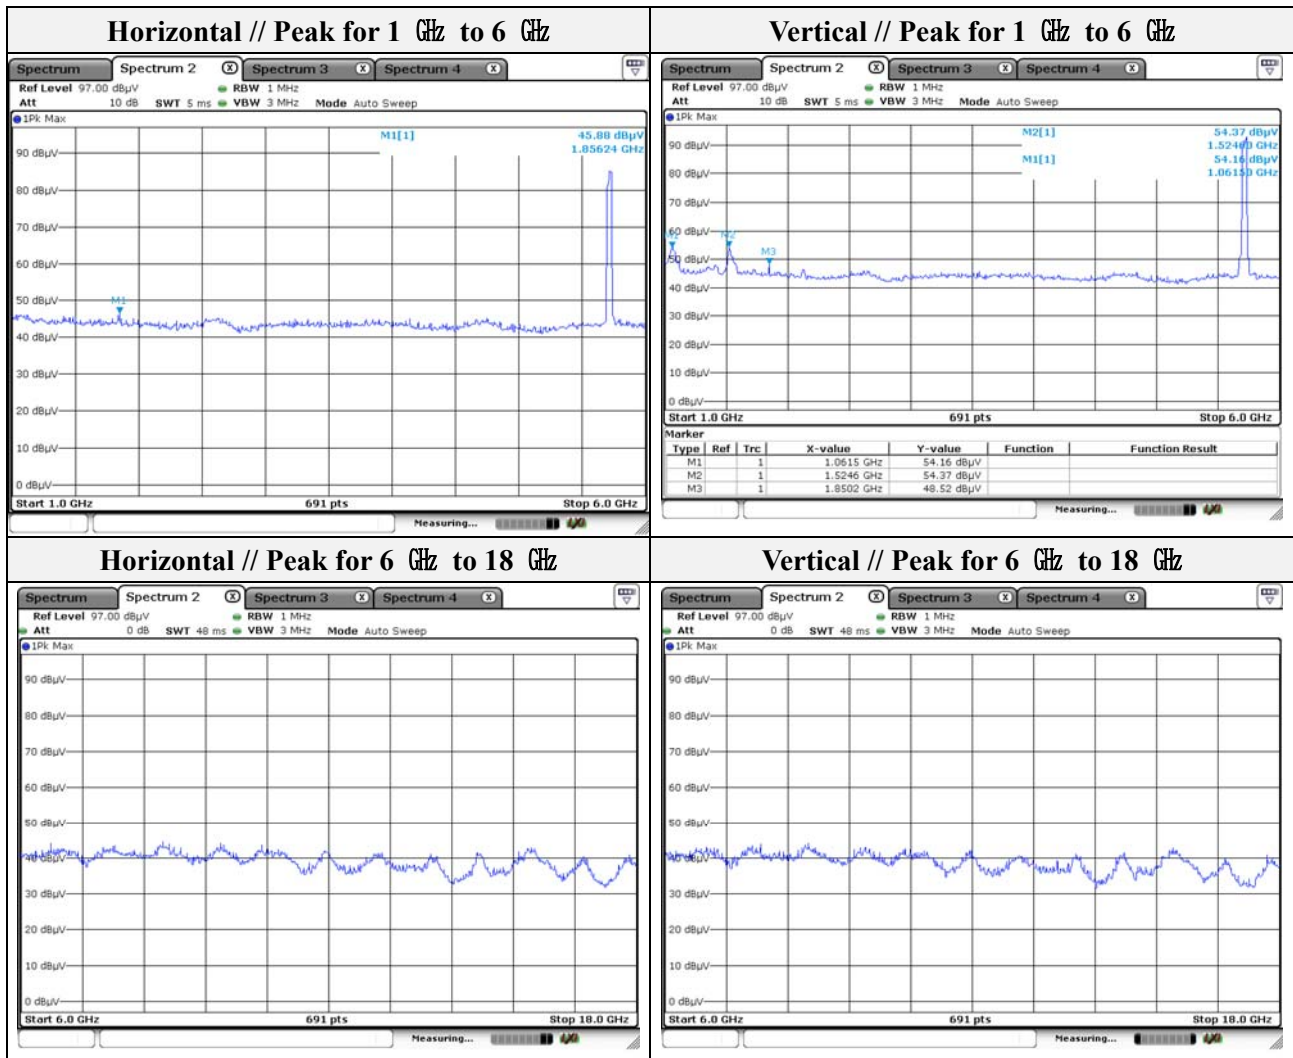

Note.  
 1. No spurious emission were detected above 6 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

Mode: UNII-3(VHT40)  
 Distance of measurement: 3 meter  
 Channel: 151


**- Spurious**

| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 1 061.50        | 52.42              | Peak        | H               | -8.29   | -        | 44.13                         | 74.00                | 29.87       |
| 1 517.40        | 49.24              | Peak        | H               | -5.51   | -        | 43.73                         | 74.00                | 30.27       |
| 1 061.50        | 53.25              | Peak        | V               | -8.29   | -        | 44.96                         | 74.00                | 29.04       |
| 1 517.40        | 49.89              | Peak        | V               | -5.51   | -        | 44.38                         | 74.00                | 29.62       |
| 2 125.20        | 49.01              | Peak        | V               | -0.67   | -        | 48.34                         | 68.20                | 19.86       |

**- Band edge**

| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 5 715.94        | 43.01              | Peak        | H               | 8.73    | -        | 51.74                         | 109.66               | 57.92       |
| 5 725.00        | 41.95              | Peak        | H               | 8.77    | -        | 50.72                         | 122.20               | 71.48       |
| 5 708.68        | 42.60              | Peak        | V               | 8.70    | -        | 51.30                         | 107.63               | 56.33       |
| 5 725.00        | 46.53              | Peak        | V               | 8.77    | -        | 55.30                         | 122.20               | 66.90       |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

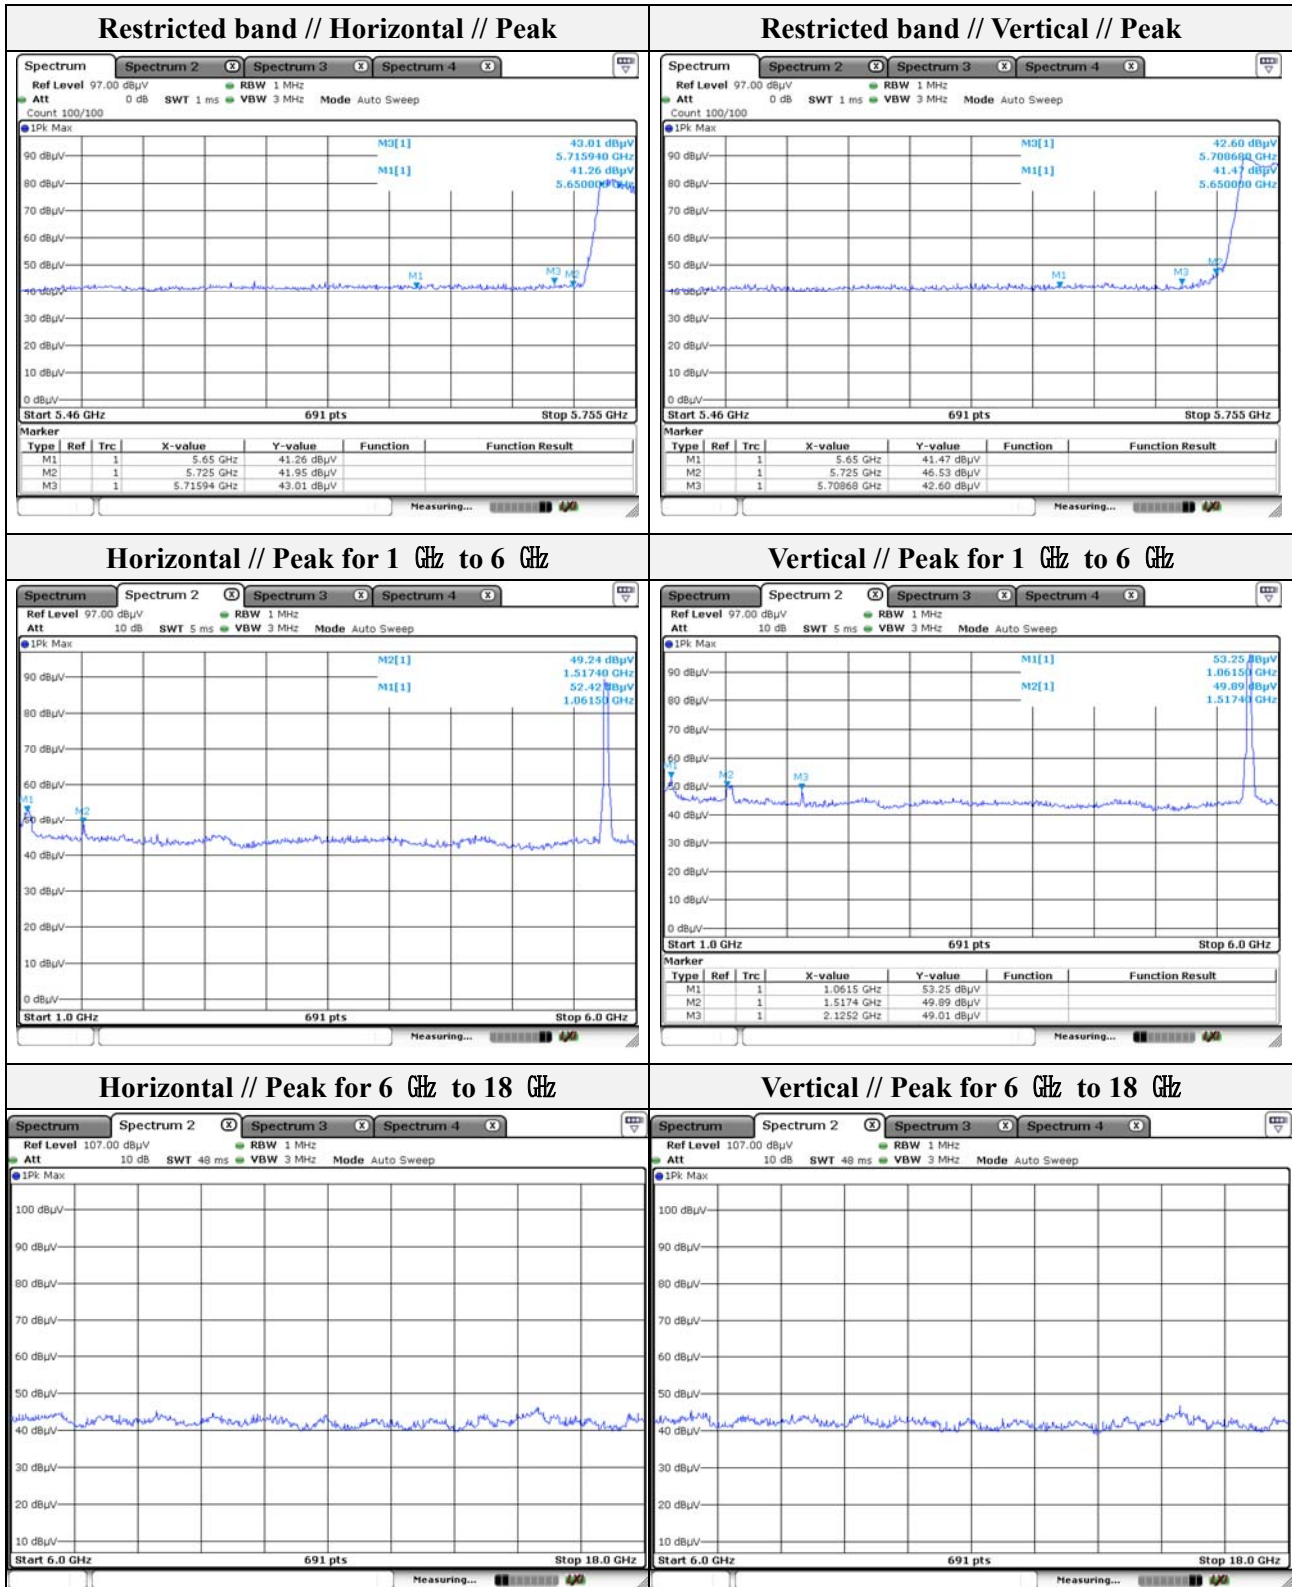

Note.

1. No spurious emission were detected above 6 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr




Mode: UNII-3(VHT40)  
Distance of measurement: 3 meter  
Channel: 159

- **Spurious**

| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 1 068.70        | 50.43              | Peak        | H               | -8.25   | -        | 42.18                         | 74.00                | 31.82       |
| 1 539.10        | 47.25              | Peak        | H               | -5.31   | -        | 41.94                         | 74.00                | 32.06       |
| 1 068.70        | 53.97              | Peak        | V               | -8.25   | -        | 45.72                         | 74.00                | 28.28       |
| 1 589.70        | 51.30              | Peak        | V               | -4.85   | -        | 46.45                         | 74.00                | 27.55       |
| 1 850.20        | 49.04              | Peak        | V               | -2.35   | -        | 46.69                         | 68.20                | 21.51       |

- **Band edge**

| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 5 850.00        | 49.06              | Peak        | H               | 9.32    | -        | 58.38                         | 122.20               | 63.82       |
| 5 851.98        | 48.31              | Peak        | H               | 9.33    | -        | 57.64                         | 117.69               | 60.05       |
| 5 850.00        | 43.97              | Peak        | V               | 9.32    | -        | 53.29                         | 122.20               | 68.91       |
| 5 853.90        | 51.16              | Peak        | V               | 9.33    | -        | 60.49                         | 113.31               | 52.82       |

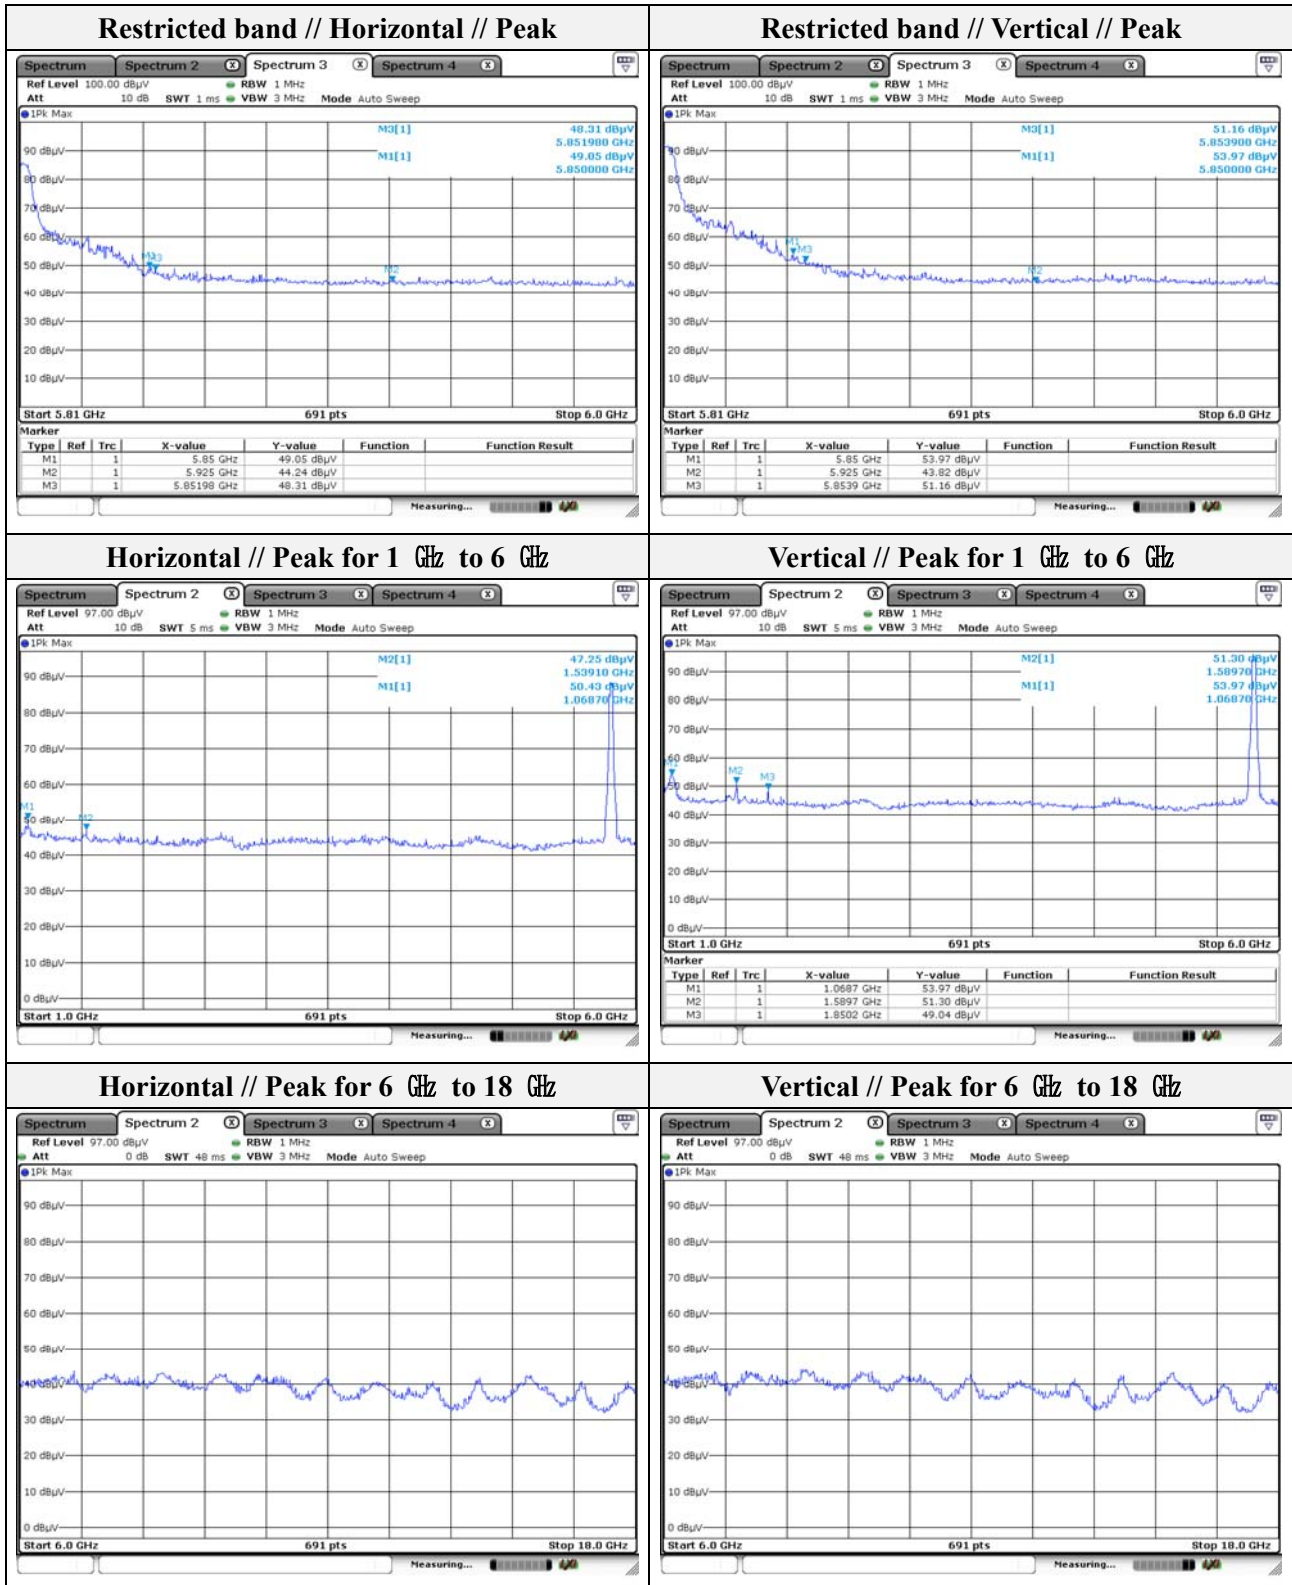

Note.

1. No spurious emission were detected above 6 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-19T0015  
Page (94) of (110)

Mode: UNII-1(VHT80)  
Distance of measurement: 3 meter  
Channel: 42


**- Spurious**

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 068.70        | 51.08        | Peak        | H               | -8.25   | -        | 42.83                   | 74.00          | 31.17       |
| 1 517.40        | 47.39        | Peak        | H               | -5.51   | -        | 41.88                   | 74.00          | 32.12       |
| 1 814.00        | 48.05        | Peak        | H               | -2.68   | -        | 45.37                   | 68.20          | 22.83       |
| 1 061.50        | 55.35        | Peak        | V               | -8.29   | -        | 47.06                   | 74.00          | 26.94       |
| 1 517.40        | 48.63        | Peak        | V               | -5.51   | -        | 43.12                   | 74.00          | 30.88       |
| 1 850.20        | 47.94        | Peak        | V               | -2.35   | -        | 45.59                   | 68.20          | 22.61       |


**- Band edge**

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 4 646.40        | 46.22        | Peak        | H               | 5.79    | -        | 52.01                   | 74.00          | 21.99       |
| 5 123.10        | 50.49        | Peak        | V               | 8.26    | -        | 58.75                   | 74.00          | 15.25       |
| 5 150.00        | 47.78        | Peak        | V               | 8.22    | -        | 56.00                   | 74.00          | 18.00       |
| 5 115.10        | 34.09        | Average     | V               | 8.27    | 3.43     | 45.79                   | 54.00          | 8.21        |
| 5 150.00        | 33.00        | Average     | V               | 8.22    | 3.43     | 44.65                   | 54.00          | 9.35        |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

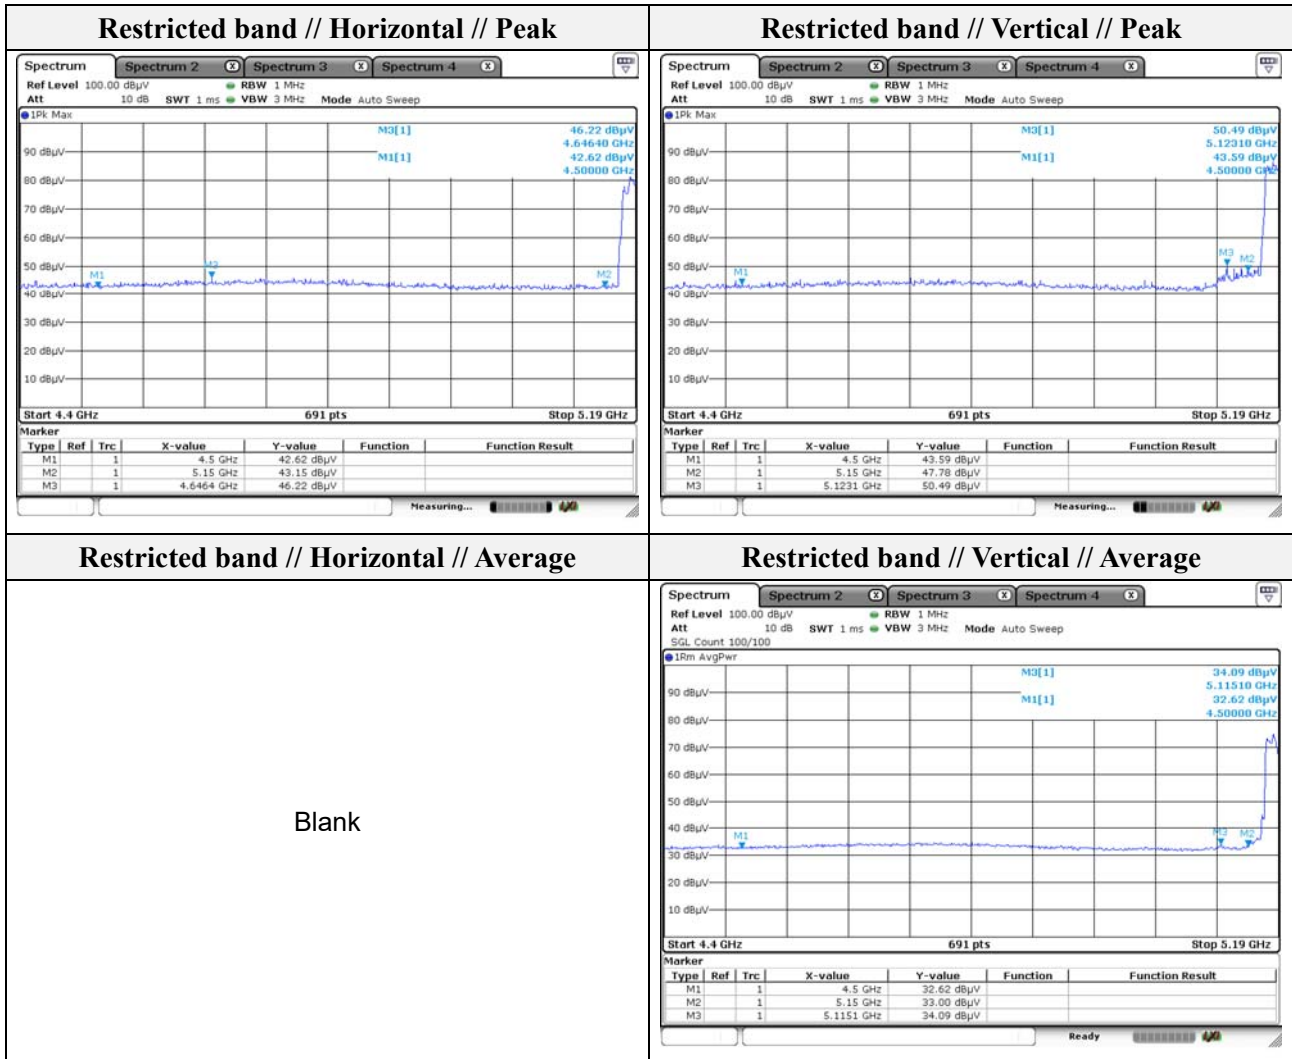

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

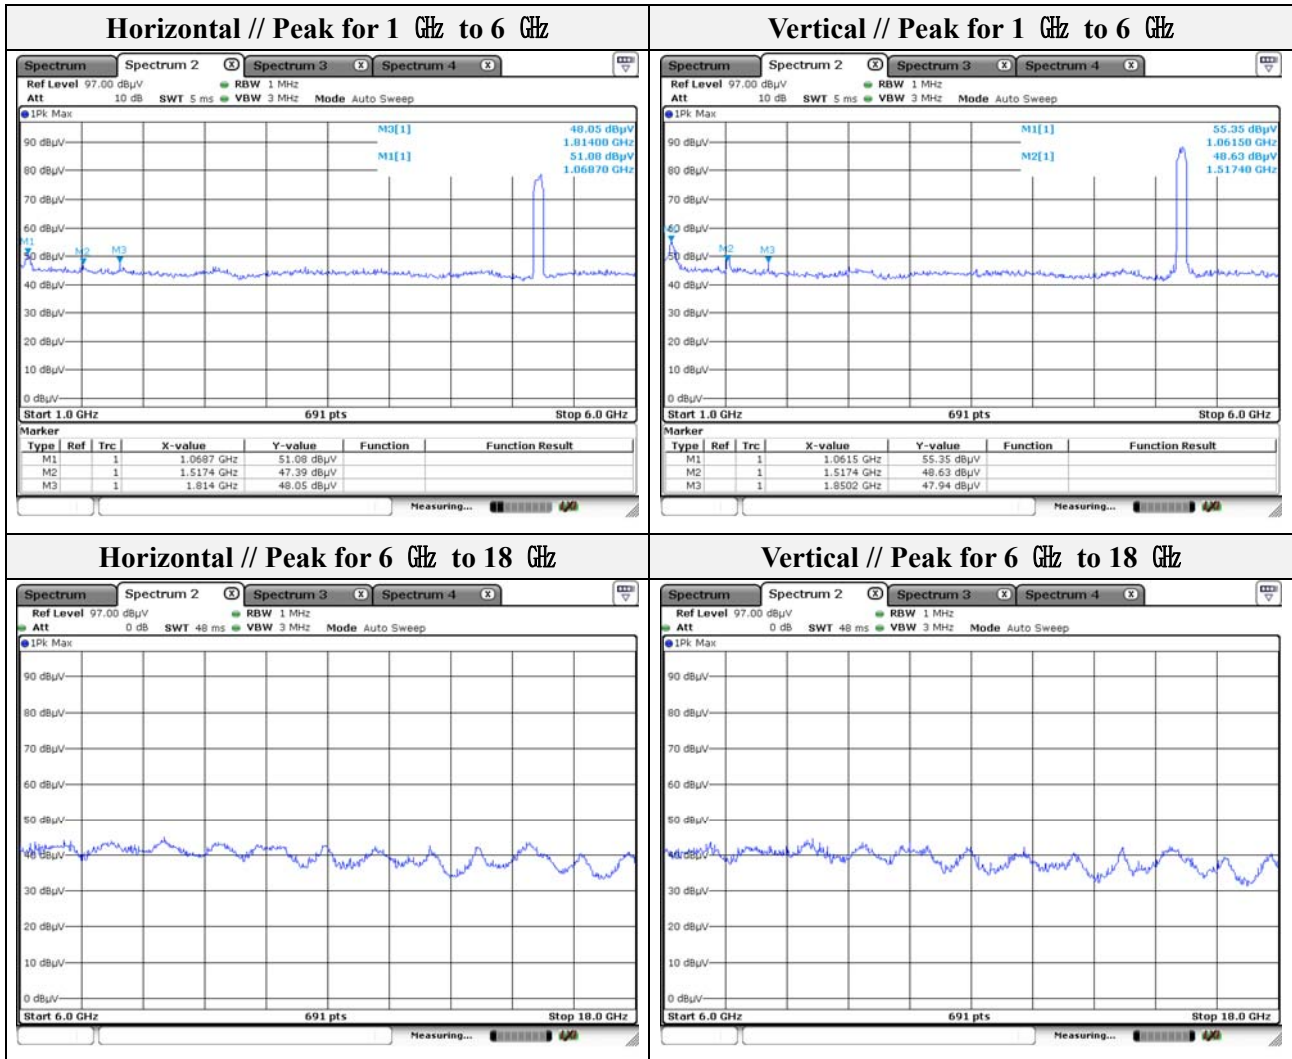

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.



Mode: UNII-2A(VHT80)  
 Distance of measurement: 3 meter  
 Channel: 58


**- Spurious**

| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 1 054.30        | 52.94              | Peak        | H               | -8.33   | -        | 44.61                         | 74.00                | 29.39       |
| 1 517.40        | 49.03              | Peak        | H               | -5.51   | -        | 43.52                         | 74.00                | 30.48       |
| 1 025.30        | 49.20              | Peak        | V               | -8.50   | -        | 40.70                         | 74.00                | 33.30       |
| 1 517.40        | 49.28              | Peak        | V               | -5.51   | -        | 43.77                         | 74.00                | 30.23       |
| 1 843.00        | 47.95              | Peak        | V               | -2.42   | -        | 45.53                         | 68.20                | 22.67       |


**- Band edge**

| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 5 364.07        | 45.18              | Peak        | H               | 7.93    | -        | 53.11                         | 74.00                | 20.89       |
| 5 352.49        | 49.46              | Peak        | V               | 7.94    | -        | 57.40                         | 74.00                | 16.60       |
| 5 352.26        | 35.15              | Average     | V               | 7.94    | 4.97     | 48.06                         | 54.00                | 5.94        |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

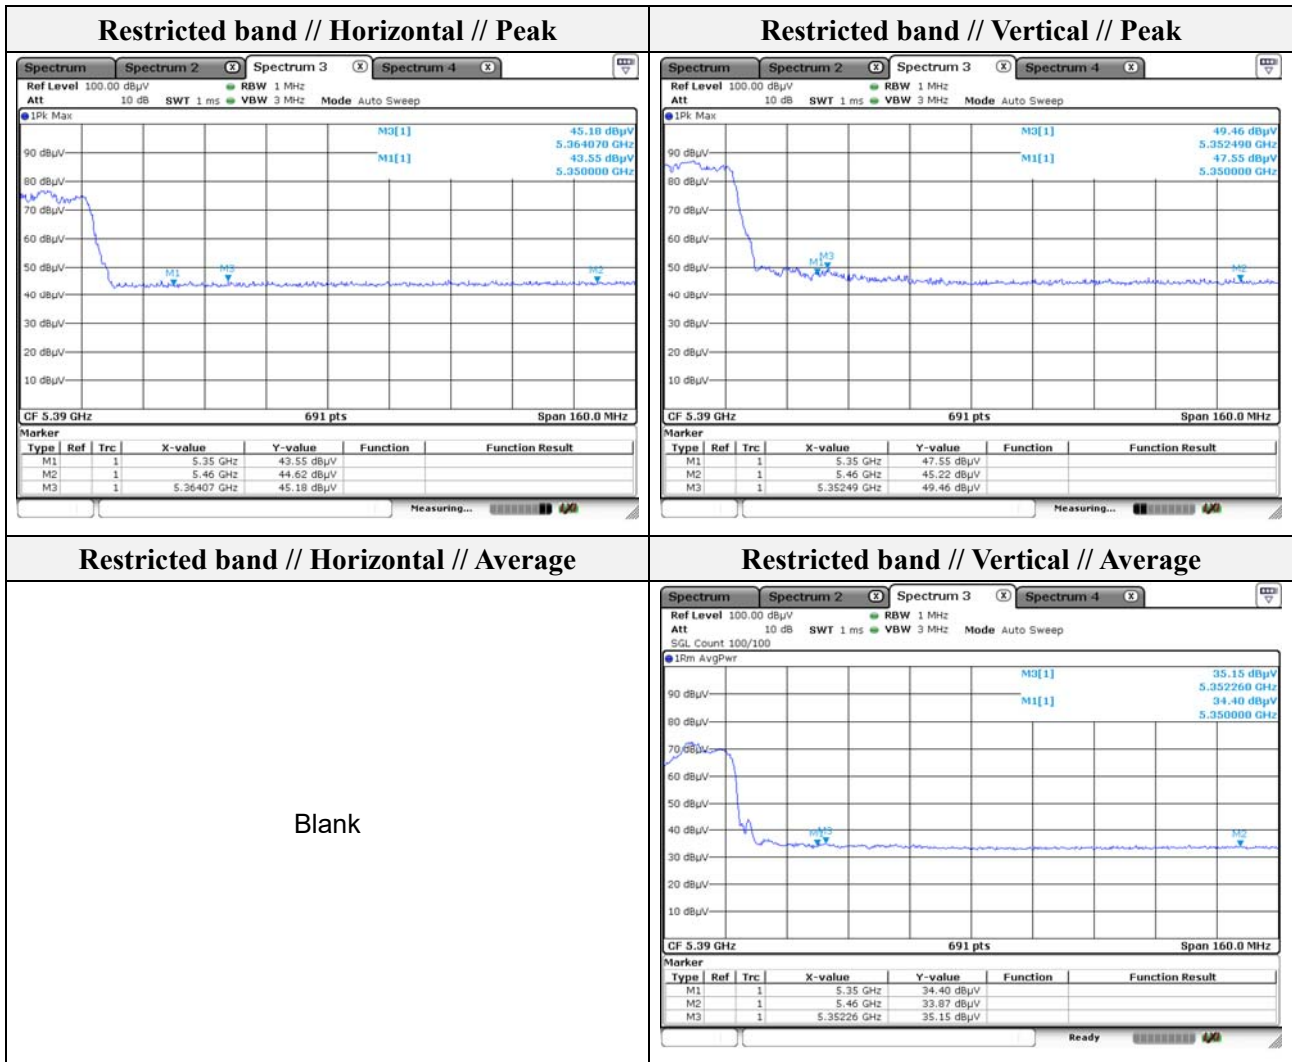

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

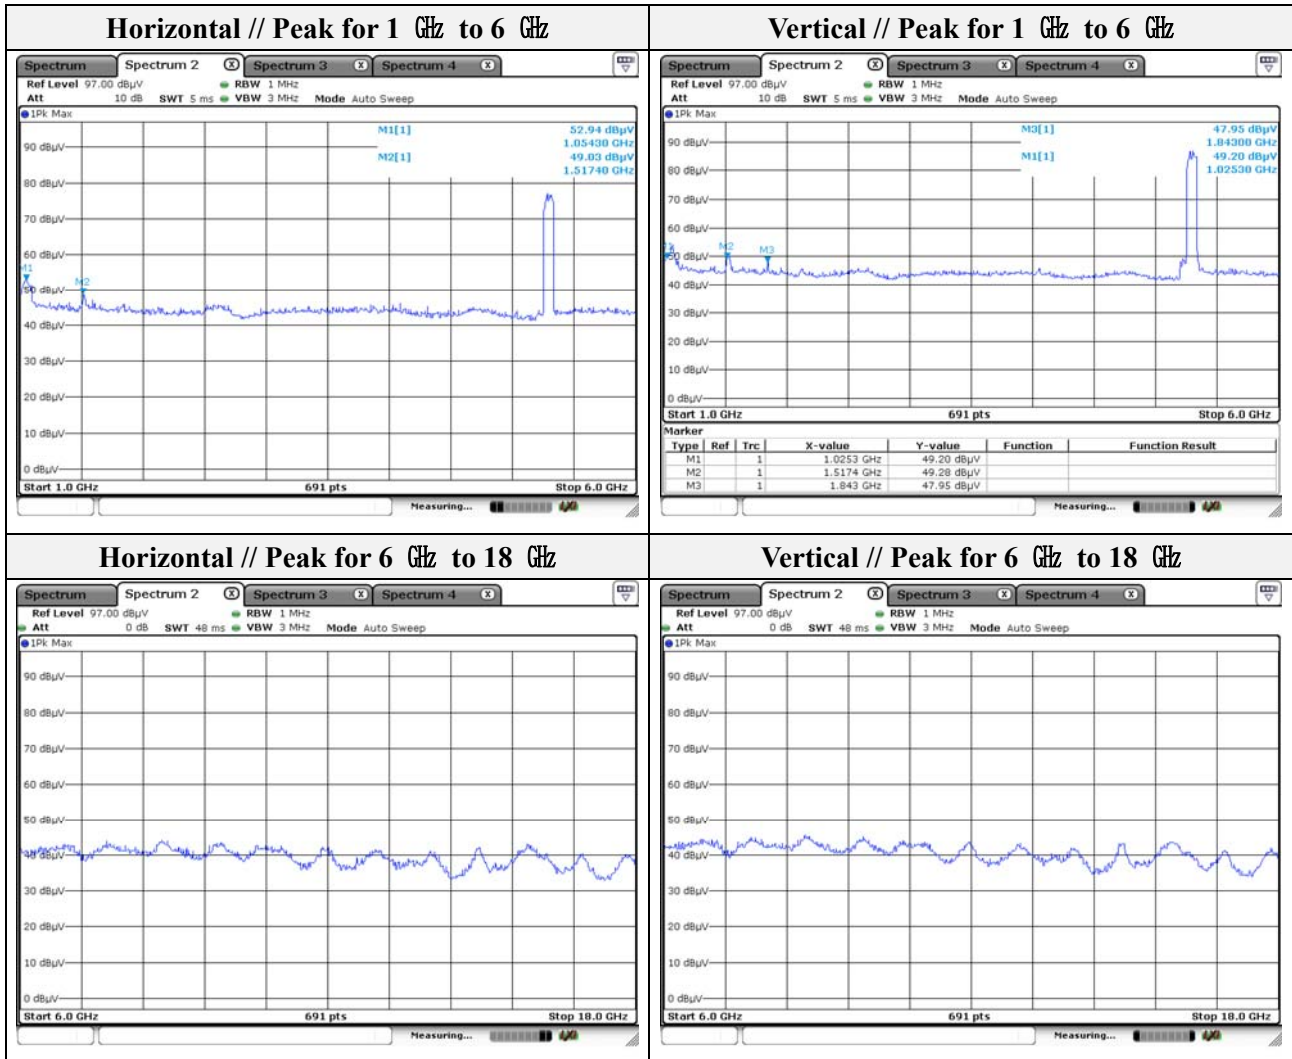

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-19T0015  
Page (100) of (110)

Mode: UNII-2C(VHT80)  
Distance of measurement: 3 meter  
Channel: 106


**- Spurious**

| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 1 047.00        | 48.25              | Peak        | H               | -8.37   | -        | 39.88                         | 74.00                | 34.12       |
| 1 850.20        | 47.53              | Peak        | H               | -2.35   | -        | 45.18                         | 68.20                | 23.02       |
| 1 336.50        | 54.25              | Peak        | V               | -6.63   | -        | 47.62                         | 74.00                | 26.38       |
| 1 850.20        | 48.19              | Peak        | V               | -2.35   | -        | 45.84                         | 68.20                | 22.36       |
| 2 125.20        | 48.52              | Peak        | V               | -0.67   | -        | 47.85                         | 68.20                | 20.35       |


**- Band edge**

| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 5 452.31        | 45.11              | Peak        | H               | 7.82    | -        | 52.93                         | 74.00                | 21.07       |
| 5 442.47        | 47.71              | Peak        | V               | 7.83    | -        | 55.54                         | 74.00                | 18.46       |
| 5 460.00        | 47.78              | Peak        | V               | 7.81    | -        | 55.59                         | 74.00                | 18.41       |
| 5 402.37        | 33.73              | Average     | V               | 7.88    | 3.70     | 45.31                         | 54.00                | 8.69        |
| 5 460.00        | 34.40              | Average     | V               | 7.81    | 3.70     | 45.91                         | 54.00                | 8.09        |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

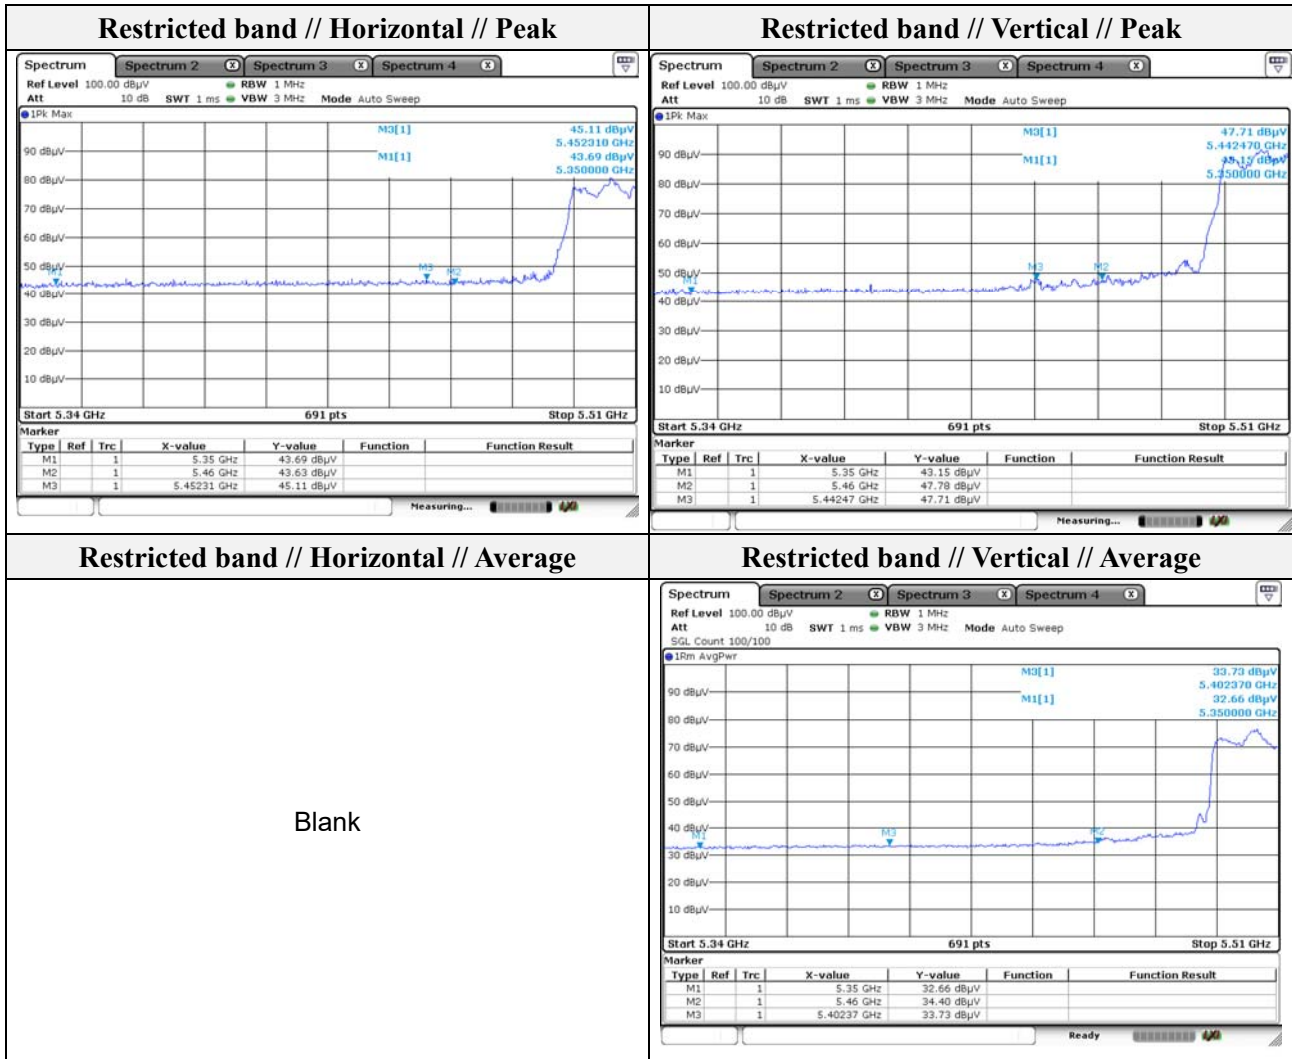

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

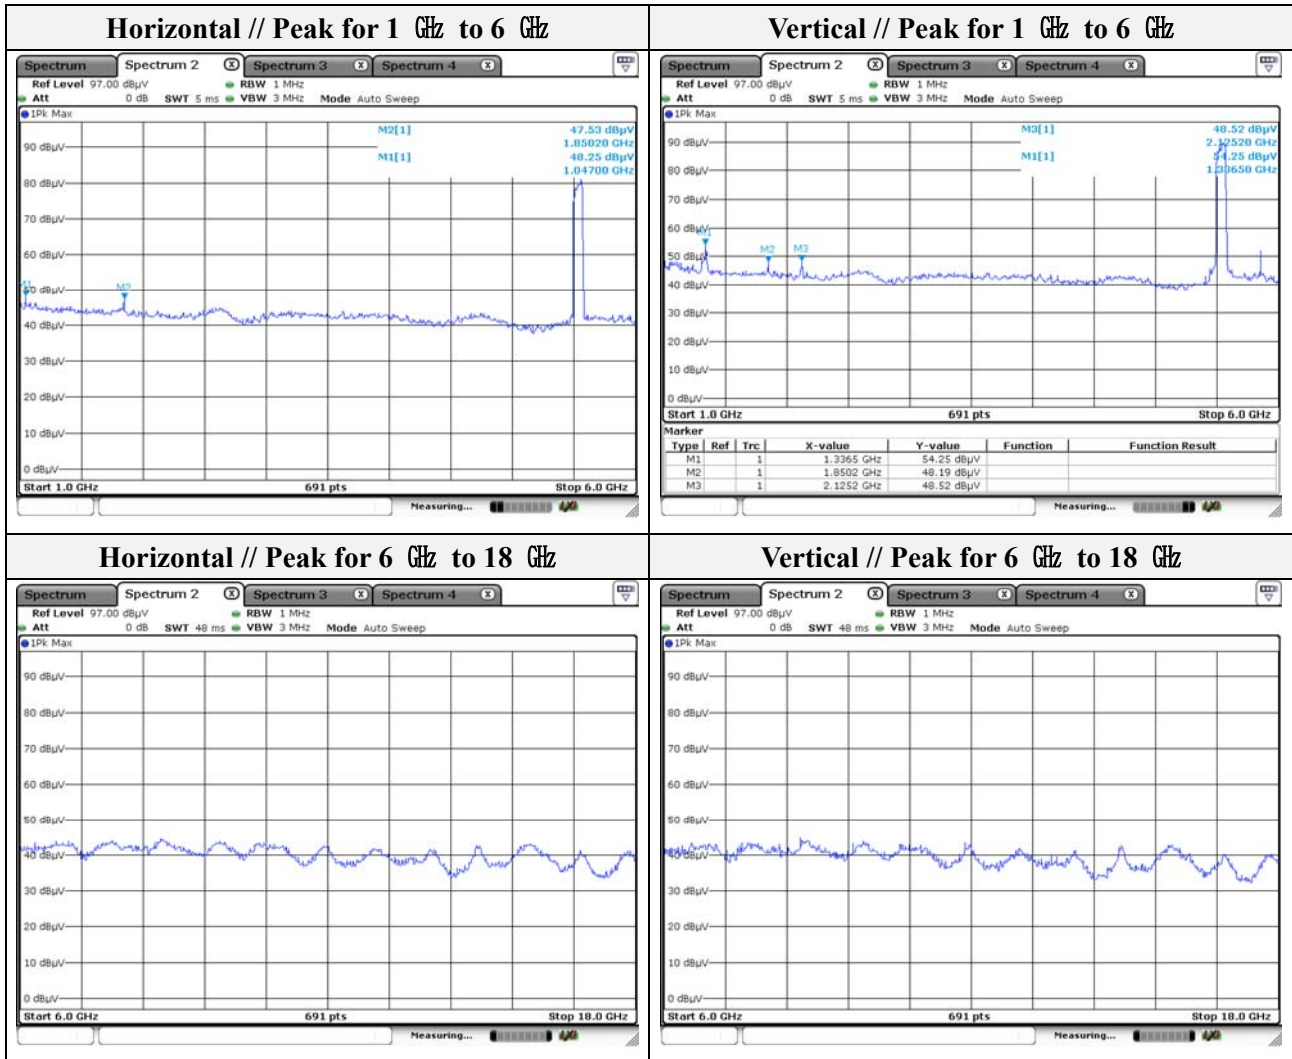

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.


Mode: UNII-2C(VHT80)

Distance of measurement: 3 meter

Channel: 122

**- Spurious**

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 054.30        | 48.65        | Peak        | H               | -8.33   | -        | 40.32                   | 74.00          | 33.68       |
| 1 307.50        | 47.23        | Peak        | H               | -6.82   | -        | 40.41                   | 74.00          | 33.59       |
| 1 829.50        | 46.28        | Peak        | H               | -2.54   | -        | 43.74                   | 68.20          | 24.46       |
| 1 307.50        | 48.20        | Peak        | V               | -6.82   | -        | 41.38                   | 74.00          | 32.62       |
| 1 850.20        | 49.07        | Peak        | V               | -2.35   | -        | 46.72                   | 68.20          | 21.48       |
| 2 125.20        | 49.60        | Peak        | V               | -0.67   | -        | 48.93                   | 68.20          | 19.27       |

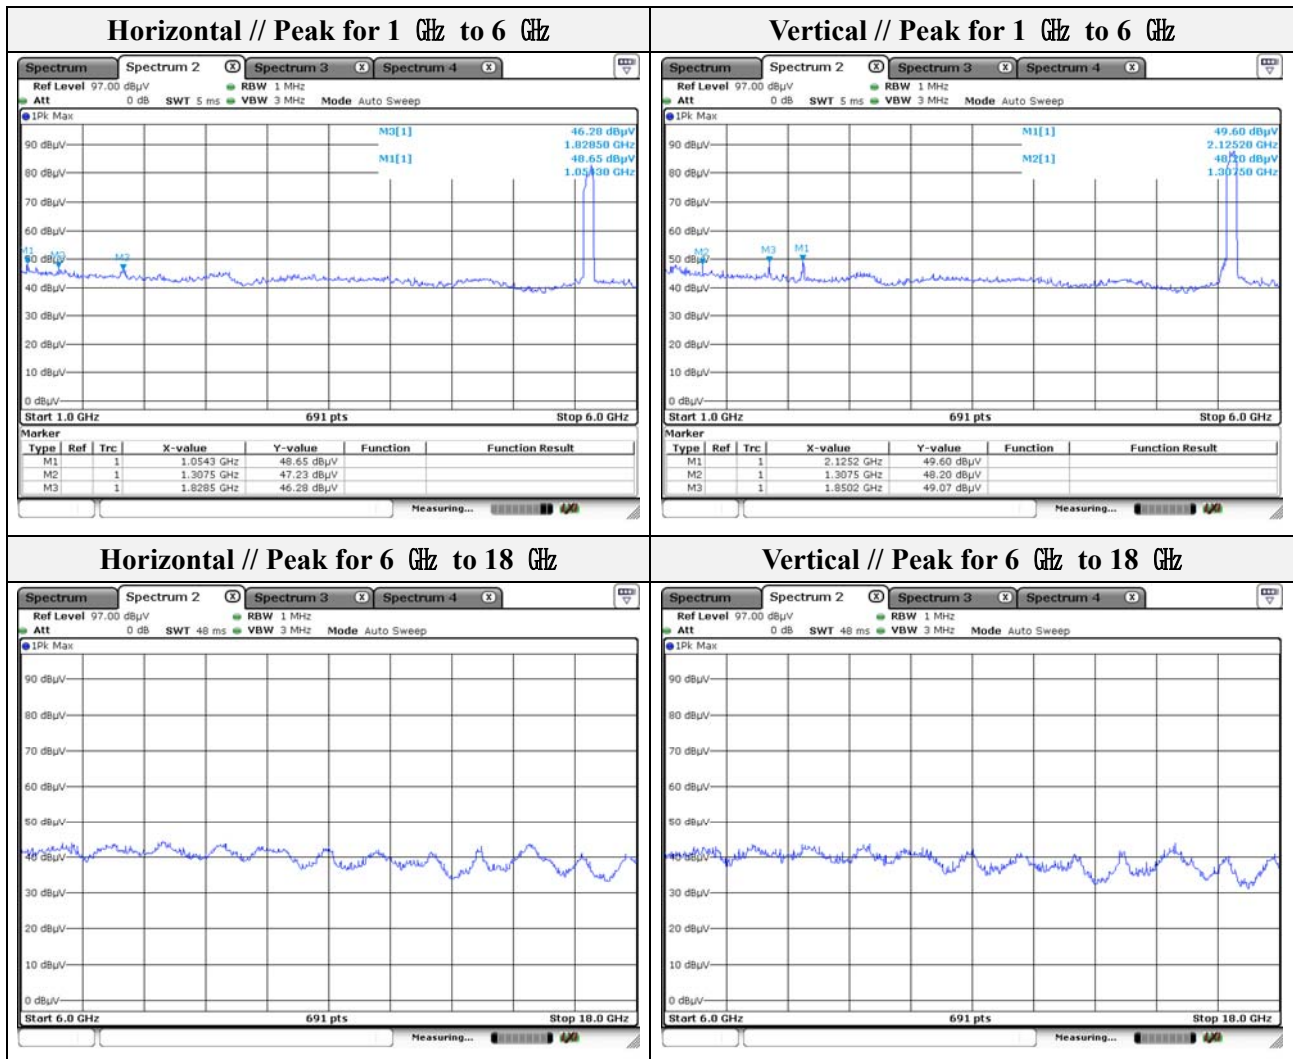

Note.

1. No spurious emission were detected above 6 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr


Mode: UNII-2C(VHT80)

Distance of measurement: 3 meter

Channel: 138

**- Spurious**

| Frequency (MHz) | Level (dBμV) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|--------------|-------------|-----------------|---------|----------|-------------------------|----------------|-------------|
| 1 068.70        | 49.07        | Peak        | H               | -8.25   | -        | 40.82                   | 74.00          | 33.18       |
| 1 835.70        | 46.90        | Peak        | H               | -2.48   | -        | 44.42                   | 68.20          | 23.78       |
| 1 495.70        | 51.36        | Peak        | V               | -5.69   | -        | 45.67                   | 74.00          | 28.33       |
| 1 850.20        | 49.04        | Peak        | V               | -2.35   | -        | 46.69                   | 68.20          | 21.51       |
| 2 125.20        | 47.10        | Peak        | V               | -0.67   | -        | 46.43                   | 68.20          | 21.77       |

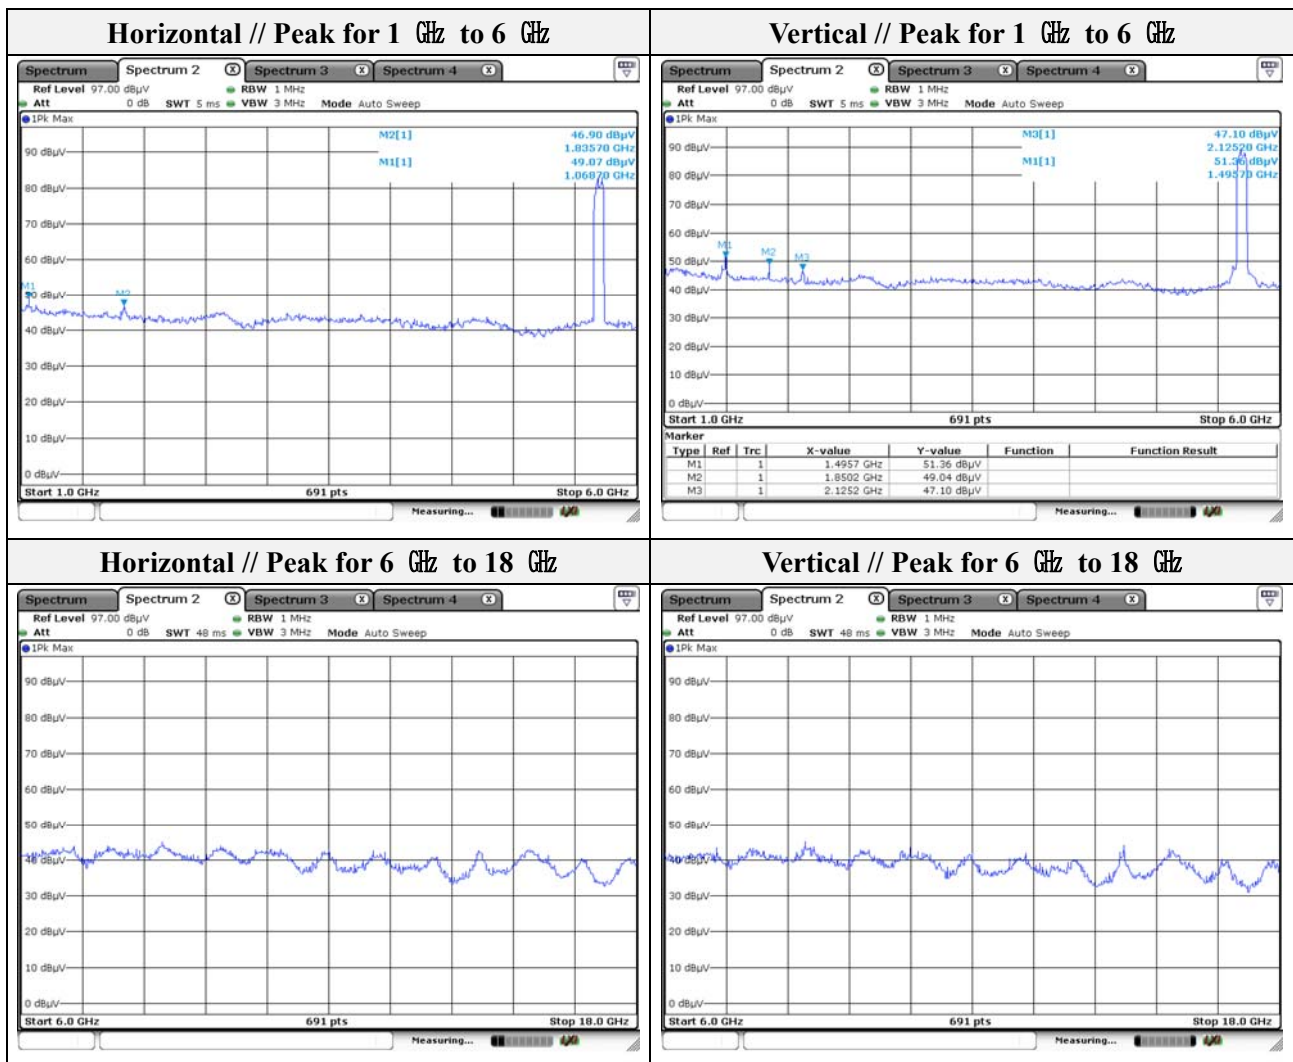

**Note.**

1. No spurious emission were detected above 6 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr





**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-19T0015  
Page (105) of (110)

Mode: UNII-3(VHT80)  
Distance of measurement: 3 meter  
Channel: 155

**- Spurious**

| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 1 068.70        | 48.33              | Peak        | H               | -8.25   | -        | 40.08                         | 74.00                | 33.92       |
| 1 814.04        | 47.58              | Peak        | H               | -2.68   | -        | 44.90                         | 68.20                | 23.30       |
| 2 125.20        | 46.86              | Peak        | H               | -0.67   | -        | 46.19                         | 68.20                | 22.01       |
| 1 054.30        | 50.15              | Peak        | V               | -8.33   | -        | 41.82                         | 74.00                | 32.18       |
| 1 850.20        | 49.76              | Peak        | V               | -2.35   | -        | 47.41                         | 68.20                | 20.79       |
| 2 125.20        | 48.68              | Peak        | V               | -0.67   | -        | 48.01                         | 68.20                | 20.19       |


**- Band edge // Below 5725 MHz**

| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 5 696.30        | 44.01              | Peak        | H               | 8.64    | -        | 52.65                         | 102.46               | 49.81       |
| 5 725.00        | 43.71              | Peak        | H               | 8.77    | -        | 52.48                         | 122.20               | 69.72       |
| 5 721.06        | 51.15              | Peak        | V               | 8.76    | -        | 59.91                         | 113.22               | 53.31       |
| 5 725.00        | 50.52              | Peak        | V               | 8.77    | -        | 59.29                         | 122.20               | 62.91       |


**- Band edge // Above 5850 MHz**

| Frequency (MHz) | Level (dB $\mu$ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 5 867.37        | 49.78              | Peak        | H               | 9.39    | -        | 59.17                         | 107.34               | 48.17       |
| 5 850.00        | 52.72              | Peak        | H               | 9.32    | -        | 62.04                         | 122.20               | 60.16       |
| 5 867.10        | 55.39              | Peak        | V               | 9.38    | -        | 64.77                         | 107.41               | 42.64       |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

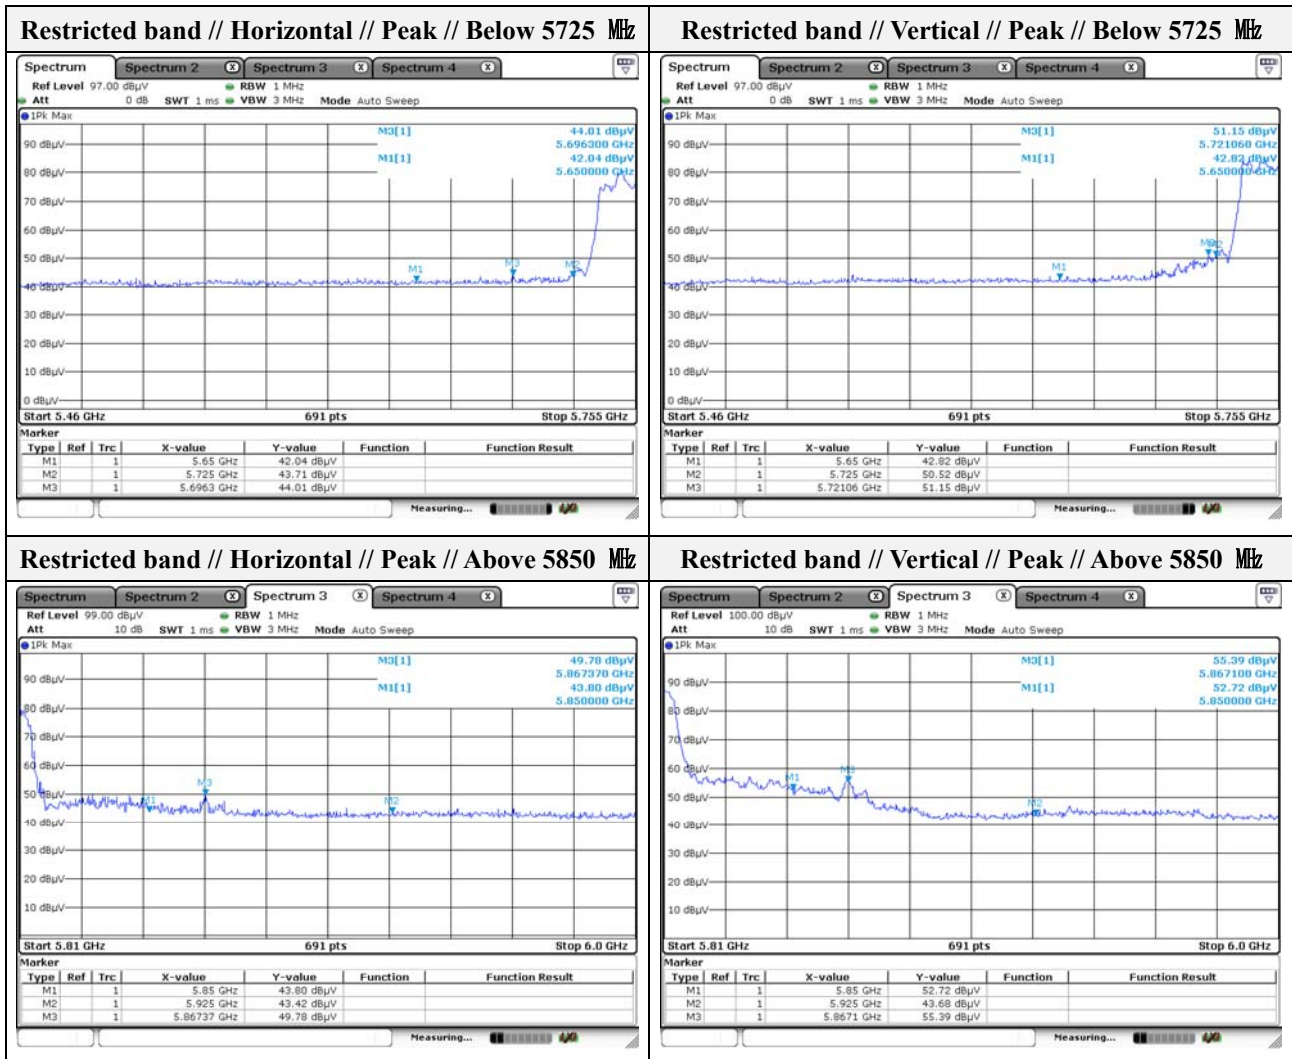

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

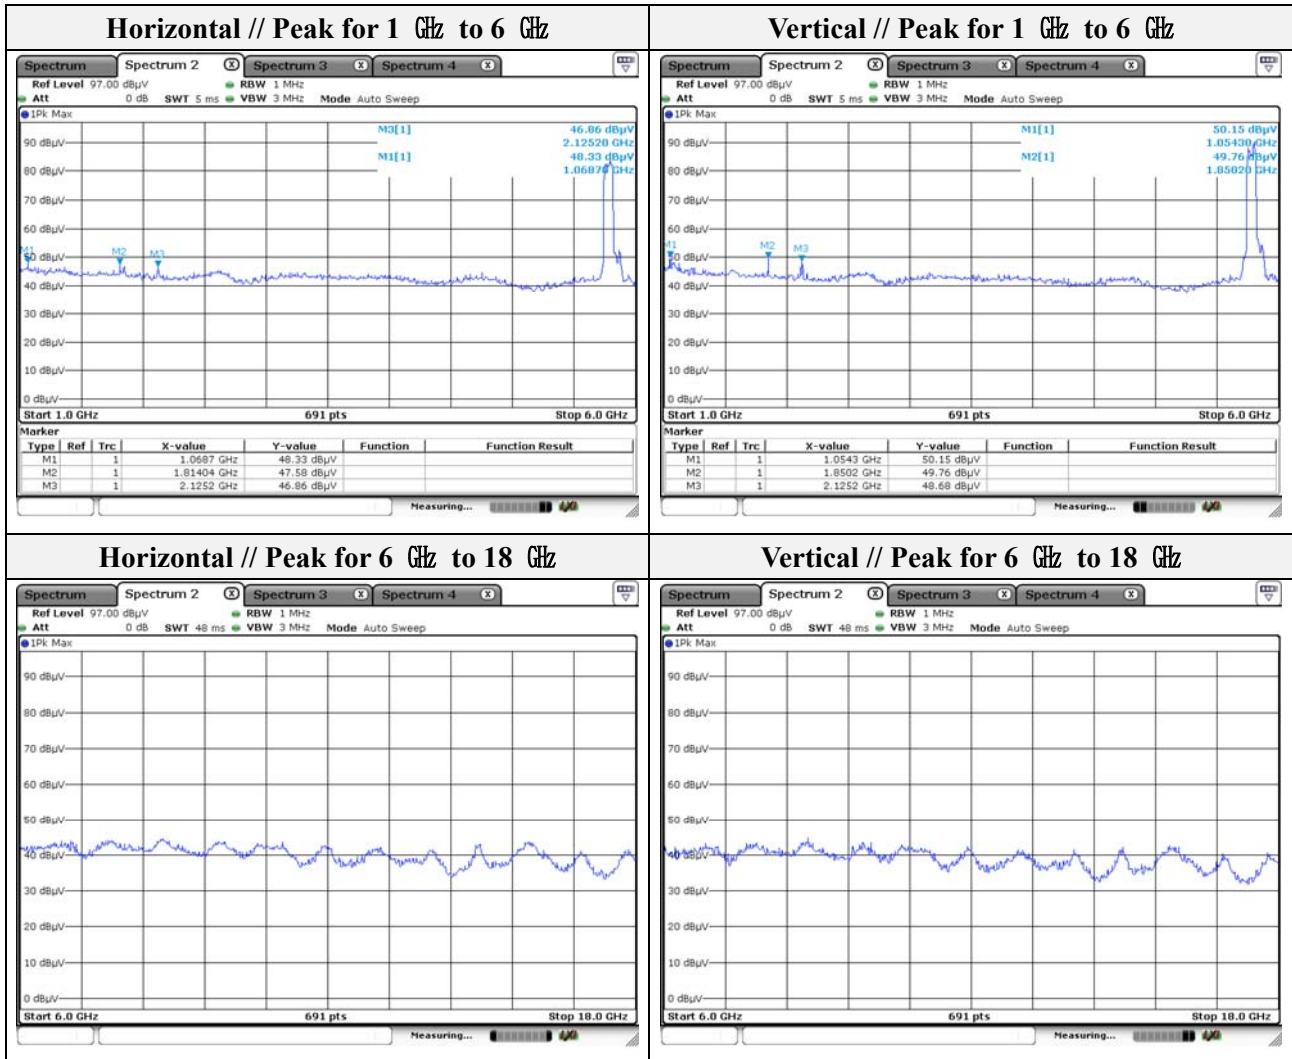


Note.

1. No spurious emission were detected above 6 GHz.

**Test results (18 GHz to 40 GHz) – Worst case**

Mode: UNII-3  
 Distance of measurement: 3 meter  
 Channel: 165(worst case)

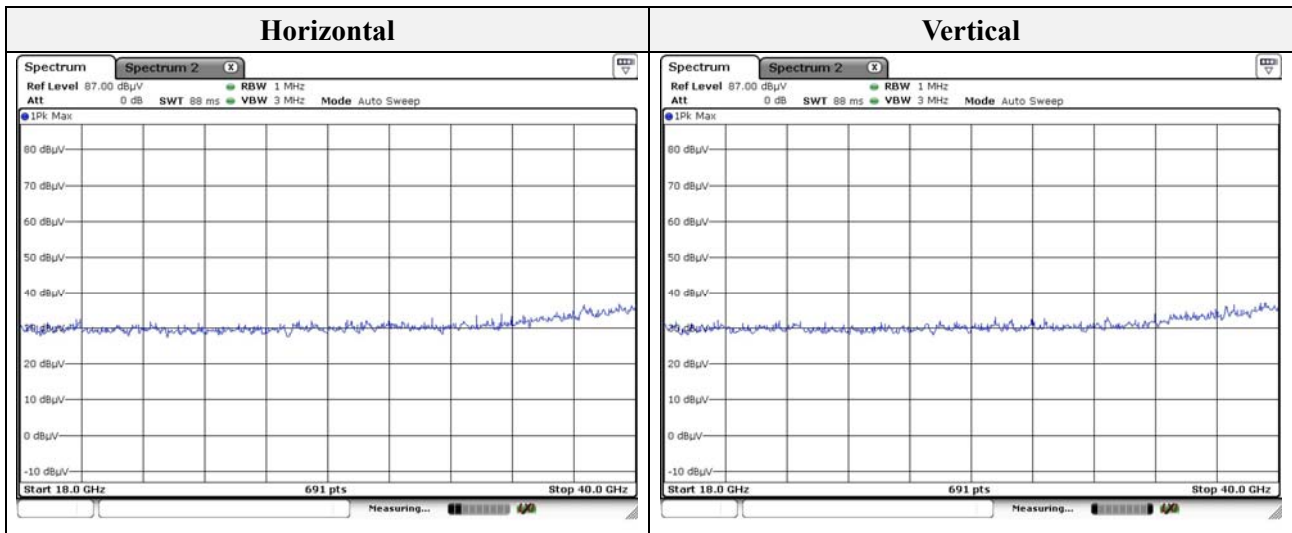

Note.

1. No spurious emission were detected above 18 GHz.



## Appendix A. Measurement equipment

| Equipment                           | Manufacturer               | Model         | Serial No.   | Calibration interval | Calibration date. | Calibration due. |
|-------------------------------------|----------------------------|---------------|--------------|----------------------|-------------------|------------------|
| Spectrum Analyzer                   | R&S                        | FSV30         | 100736       | 1 year               | 2018.06.28        | 2019.06.28       |
|                                     |                            |               |              |                      | 2019.01.09        | 2020.01.09       |
| Spectrum Analyzer                   | R&S                        | FSV40         | 101002       | 1 year               | 2018.06.29        | 2019.06.29       |
| 8360B Series Swept Signal Generator | HP                         | 83630B        | 3844A00786   | 1 year               | 2018.01.22        | 2019.01.22       |
|                                     |                            |               |              |                      | 2019.01.15        | 2020.01.15       |
| Power Meter                         | Anritsu                    | ML2495A       | 1438001      | 1 year               | 2018.01.25        | 2019.01.25       |
|                                     |                            |               |              |                      | 2019.01.15        | 2020.01.15       |
| Pulse Power Sensor                  | Anritsu                    | MA2411B       | 1339205      | 1 year               | 2018.01.25        | 2019.01.25       |
|                                     |                            |               |              |                      | 2019.01.15        | 2020.01.15       |
| Attenuator                          | HP                         | 8494B         | 2630A12857   | 1 year               | 2018.01.18        | 2019.01.18       |
|                                     |                            |               |              |                      | 2019.01.15        | 2020.01.15       |
| Loop Antenna                        | Schwarzbeck                | FMZB1513      | 225          | 2 years              | 2017.05.10        | 2019.05.10       |
| Trilog-broadband antenna            | SCHWARZBECK                | VULB 9163     | 9168-714     | 2 years              | 2018.11.26        | 2020.11.26       |
| Horn Antenna                        | A.H                        | SAS-571       | 414          | 2 years              | 2017.02.15        | 2019.02.15       |
| Horn Antenna                        | SCHWARZBECK                | BBHA9120D     | 9120D-1802   | 2 years              | 2017.09.04        | 2019.09.04       |
| High Pass Filter                    | Wainwright Instrument Gmbh | WHJS3000-10TT | 1            | 1 year               | 2018.06.29        | 2019.06.29       |
| Amplifier                           | R&S                        | SCU 01        | 100603       | 1 year               | 2018.11.26        | 2019.11.26       |
| Preamplifier                        | AGILENT                    | 8449B         | 3008A01742   | 1 year               | 2018.01.11        | 2019.01.11       |
|                                     |                            |               |              |                      | 2019.01.08        | 2020.01.08       |
| EMI Test Receiver                   | R&S                        | ESR3          | 101781       | 1 year               | 2018.04.25        | 2019.04.25       |
| EMI Test Receiver                   | R&S                        | ESU26         | 100551       | 1 year               | 2018.04.11        | 2019.04.11       |
| Pulse Limiter                       | R&S                        | ESH3-Z2       | 101915       | 1 year               | 2018.11.26        | 2019.11.26       |
| LISN                                | R&S                        | ENV216        | 101787       | 1 year               | 2018.01.31        | 2019.01.31       |
|                                     |                            |               |              |                      | 2019.01.04        | 2020.01.04       |
| DC Power supply                     | EXTENDED                   | EX-1500H2     | 405410100030 | 1 year               | 2018.04.13        | 2019.04.13       |

### Peripheral devices

| Device            | Manufacturer | Model No. | Serial No.      |
|-------------------|--------------|-----------|-----------------|
| Notebook Computer | SAMSUNG      | NT-R519   | ZKPA93ES900086Z |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr