

# EMC TEST REPORT For CE

Test Report No. : KES-E1-18T0070-R1  
Date of Issue : May. 15, 2019  
Product name : Network Camera  
Model/Type No. : XNV-6012M  
Variant Model : -  
Applicant : Hanwha Techwin Co., Ltd.  
Applicant Address : 6, Pangyo-ro 319 Beon-gil, Bundang-gu, Seongnam-si,  
Gyeonggi-do, 13488, KOREA  
Manufacturer : 1. Hanwha Techwin (Tianjin) Co.,Ltd.  
2. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.  
3. D-TECH CO.,LTD.  
Manufacturer Address : 1. No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA, Tianjin,  
300385, People's Republic of China  
2. Lot O-2, Que Vo Industrial Zone extended area,  
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam  
3. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,  
Korea (Suwon Industrial Complex)  
Date of Receipt : Dec. 21, 2017  
Test date : Jan. 01, 2018 ~ Jan. 05, 2018  
Test Results :  **In Compliance**  **Not in Compliance**

Tested by



Sung min, Choi  
EMC Test Engineer

Reviewed by



Dong-Hun, Jang  
EMC Technical Manager

This test report is not related to KOLAS.



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-18T0070-R1  
Page (2) of (56)

---

**REPORT REVISION HISTORY**

| <b>Date</b>   | <b>Test Report No.</b> | <b>Revision History</b>             |
|---------------|------------------------|-------------------------------------|
| Jan. 10, 2018 | KES-E1-18T0070         | Issued                              |
| May. 15, 2019 | KES-E1-18T0070-R1      | Re-issue due to manufacturer change |
|               |                        |                                     |
|               |                        |                                     |
|               |                        |                                     |
|               |                        |                                     |
|               |                        |                                     |
|               |                        |                                     |
|               |                        |                                     |
|               |                        |                                     |

***This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.***

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## TABLE OF CONTENTS

|   |  |    |
|---|--|----|
| 1.0   | General Product Description .....                          | 4  |
| 1.1   | Test Voltage & Frequency .....                             | 5  |
| 1.2   | Variant Model Differences.....                             | 6  |
| 1.3   | Device Modifications.....                                  | 6  |
| 1.4   | Equipment Under Test.....                                  | 6  |
| 1.5   | Support Equipments.....                                    | 6  |
| 1.6   | External I/O Cabling.....                                  | 7  |
| 1.7   | E.U.T Operating Mode(s).....                               | 7  |
| 1.8   | Configuration.....   | 8  |
| 1.9   | Remarks when standards applied .....                       | 9  |
| 1.10  | Calibration Details of Equipment Used for Measurement..... | 9  |
| 1.11  | Test Facility .....  | 9  |
| 1.12  | Laboratory Accreditations and Listings .....               | 9  |
| 2.0   | Test Regulations.....                                      | 9  |
| 2.1   | Conducted Emissions at Mains Power Ports.....              | 12 |
| 2.2   | Conducted Emissions at Telecommunication Ports .....       | 13 |
| 2.3   | Radiated Electric Field Emissions(Below 1 GHz) .....       | 14 |
| 2.4   | Radiated Electric Field Emissions(Above 1 GHz).....        | 15 |
| 2.5   | Harmonic Current Emissions.....                            | 16 |
| 2.6   | Voltage Fluctuations and Flicker .....                     | 17 |
| 3.0   | Criteria for compliance.....                               | 18 |
| 3.1   | Electrostatic Discharge.....                               | 20 |
| 3.2   | Radiated Electric Field Immunity .....                     | 23 |
| 3.3   | Electrical Fast Transients/Bursts .....                    | 26 |
| 3.4   | Surge Transients.....                                      | 28 |
| 3.5   | Conducted Disturbance .....                                | 31 |
| 3.6   | Voltage Dips and Short Interruptions .....                 | 34 |
| APPENDIX A – TEST DATA.....   |  | 36 |
| Conducted Emissions at Mains Power Ports.....                         |  | 36 |
| Conducted Emissions at Telecommunication Ports .....                  |  | 38 |
| Radiated Electric Field Emissions(Below 1 GHz) .....                  |  | 40 |
| Radiated Electric Field Emissions(Above 1 GHz).....                   |  | 41 |
| Harmonic Current Emissions and Voltage Fluctuations and Flicker ..... |  | 42 |
| Test Setup Photos and Configuration .....                             |  | 45 |
| Conducted Voltage Emissions .....                                     |  | 45 |
| Conducted Telecommunication Emissions .....                           |  | 46 |
| Radiated Electric Field Emissions(Below 1 GHz) .....                  |  | 47 |
| Radiated Electric Field Emissions(Above 1 GHz).....                   |  | 48 |
| Harmonic Current Emissions and Voltage Fluctuations and Flicker ..... |  | 49 |
| Electrostatic Discharge .....   |  | 50 |
| Radiated Electric Field Immunity .....                                |  | 50 |
| Electrical Fast Transients/Bursts.....                                |  | 51 |
| Surge Transients.....   |  | 51 |
| Conducted Disturbance.....  |  | 52 |
| Voltage Dips and Short Interruptions.....                             |  | 52 |
| EUT External Photographs.....   |  | 53 |
| EUT Internal Photographs .....  |  | 54 |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## 1.0 General Product Description

### Main Specifications of E.U.T are:

|   |
|---|
| 1/2.8" 2M CMOS  |
| 1945(H) x 1109(V) 2.16M   |
| 1945(H) x 1097(V) 2.13M   |
| Progressive Scan  |
| Color : 0.055 lux(F2.0, 1/30sec) (TBD)  |
| B/W : 0.0055Lux   |
| 50dB  |
| USB : Micro USB type B, 1280x720, for installation  |
| 2.4mm Fixed   |
| F2.0  |
| H 139° V 73° D167° (TBD)  |
| 0.4m(1.31ft)  |
| Manual  |
| Fixed   |
| Board-in type   |
| ±5°/0-67°/±90°  |
| -   |
| Off / On (Displayed up to 85 characters)  |
| - WW : English/Numeric/Special Characters   |
| - China : English/Numeric/Special/Chinese Characters  |
| - Common : Multi-line (Max 5), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale by Resolution  |
| Auto (ICR) / Color / B/W / External / Schedule  |
| Off / BLC / HLC(Masking/Dimming), WDR   |
| 150dB   |
| SSDR (Off / On)   |
| SSNR5 (2D+3D Noise Filter) (Off / On)   |
| Off / On  |
| Auto(input from fog detection) / Manual / Off   |
| Off / On(Sea, 8point Polygonal zones), Handover   |
| Off / On (32ea, polygonal zones)  |
| - Color : Grey/Green/Red/Blue/Black/White   |
| - Mosaic  |
| Off / Low / Middle / High   |
| ATW / AWC / Manual / Indoor / Outdoor((Included Mercury & Sodium)   |
| level adjustment  |
| On/Off (5 levels with Min/Max)  |
| Minimum / Maximum / Anti flicker (2 ~ 1/12,000sec)  |
| 24X, Digital PTZ(Preset, Group)   |
| Flip : On/Off   |
| Mirror : On/Off   |
| Hallway view : 90°/270°   |
| Tampering, Loitering, Directional Detection, Defocus Detection, Fog Detection, Virtual Line, Enter/Exit, Appear / Disappear, Audio Detection, Face Detection, Motion Detection, Digital Auto Tracking, Sound Classification |
| -   |
| Motion Detection, Video & Audio Analytics, Network Disconnect   |
| File upload via FTP, E-Mail   |
| Notification via E-Mail   |
| local storage(SD/SDHC/SDXC) or NAS recording at Event Triggers  |
| External output   |
| DPTZ preset   |
| Selectable (Mic IN/Line IN), Built-in microphone  |
| Supply voltage: 2.5VDC(4mA), Input Impedance: approx. 2K Ohm  |
| Line out, Max output level: 1 Vrms  |
| Off / On  |
| Support   |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
 www.kes.co.kr

Test report No.:  
 KES-EI-18T0070-R1  
 Page (5) of (56)

|   |
|---|
| M12 (10/100BASE-T)  |
| H.265/H.264 (MPEG-4 Part 10/AVC) : Main/Baseline/High , Motion JPEG   |
| 1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240   |
| H.265/H.264 : Max. 60fps at all resolutions   |
| Motion JPEG : Max. 30fps  |
| Manual Mode (area-based : SEA)  |
| Support   |
| H.264/H.265 : Target Bitrate Level Control  |
| MJPEG : Target Bitrate Level Control  |
| H.264/H.265 : CBR or VBR  |
| MJPEG : VBR   |
| Multiple Streaming (Up to 10 Profiles)  |
| G.711 u-law /G.726 Selectable   |
| G.726 (ADPCM) 8KHz, G.711 8KHz  |
| G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps  |
| AAC-LC : 48Kbps at 16KHz  |
| Bi-directional (2-Way)  |
| IPv4, IPv6  |
| TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour |
| HTTPS(SSL) Login Authentication   |
| Digest Login Authentication   |
| IP Address Filtering  |
| User access Log   |
| 802.1X Authentication (EAP-TLS, EAP-LEAP)   |
| Unicast / Multicast   |
| 20 users at Unicast Mode  |
| SD/SDHC/SDXC 1slot (up to 256 GB)   |
| - Motion Images recorded in the SD/SDHC/SDXC memory card can be downloaded.   |
| NAS(Network Attached Storage)   |
| Local PC for instant Recording  |
| ONVIF Profile S/G   |
| SUNAPI(HTTP API)  |
| Open Platform   |
| English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek                             |
| Supported OS: Windows 7, 8.1, 10, Mac OS X 10.10, 10.11, 10.12  |
| Non-plugin Webviewer  |
| Supported Browser: Google Chrome 54, MS Edge 38, Mozilla Firefox 49(Window 64bit only) , Apple Safari 9 (Mac OS X only)   |
| Plug-in Webviewer   |
| Supported Browser : MS Explore 11, Apple Safari 9 (Mac OS X only)   |
| SmartViewer, SSM  |
| -30°C ~ +55°C (-22°F ~ +131°F) / Less than 90% RH   |
| *Start up should be done at above -20°C   |
| -50°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH   |
| IP66  |
| EN55011:2009+A1:2010, EN50581:2012, EN50121-3-2:2015, EN61000-4-2:2009  |
| EN61000-4-3:2006+A2:2010, EN61000-4-4:2012, EN61000-4-5:2014  |
| EN61000-4-6:2009, EN50155:2007, NEMA 4X   |
| IK10, NEMA4X  |
| PoE(IEEE802.3af, Class3)  |
| TBD   |
| Ivory / Metal   |
| 99 x 52 x 100   |
| 296g(TBD)   |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr



## 1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage       230Vac    100 Vac    24 Vac    12 Vdc    PoE

Frequency     50 Hz     60 Hz

## 1.2 Variant Model Differences

Not applicable

## 1.3 Device Modifications

Not applicable

## 1.4 Equipment Under Test

| Description    | Model Number | Serial Number | Manufacturer                     | Remarks |
|----------------|--------------|---------------|----------------------------------|---------|
| Network Camera | XNV-6012M    | -             | Hanwha Techwin (Tianjin) Co.,Ltd | E.U.T   |

## 1.5 Support Equipments

| Description    | Model Number  | Serial Number | Manufacturer                   | Remarks |
|----------------|---------------|---------------|--------------------------------|---------|
| PoE Adaptor    | POE 36U-1AT-R | P90215791A1   | PHIHONG                        | -       |
| Laptop         | LG15N54       | 410NZET022292 | LG                             | -       |
| Laptop Adaptor | DA-1900-08    | 9700591703    | Dongguang Lite Power 2nd Plant | -       |
| Speaker        | BR10000A CUVE | -             | BEIJING EDIFIER HI-TECH GROUP. | -       |
| Mike           | CMK-303       | -             | CAMAC                          | -       |
| Micro SD Card  | -             | -             | SanDisk                        | 16 GB   |

## 1.6 External I/O Cabling

| Start                     |                 | END           |                 | Cable Spec. |        |
|---------------------------|-----------------|---------------|-----------------|-------------|--------|
| Description               | I/O Port        | Description   | I/O Port        | Length      | Shield |
| Network Camera<br>(E.U.T) | RJ-45<br>(PoE)  | PoE Adaptor   | RJ-45<br>(PoE)  | 3.0         | U      |
|                           | 3.5 mm          | Speaker       | 3.5 mm          | 1.6         | U      |
|                           | 3.5 mm          | Mike          | 3.5 mm          | 1.7         | U      |
|                           | SLOT            | Micro SD Card | SLOT            | -           | -      |
| PoE Adaptor               | RJ-45<br>(Data) | Laptop        | RJ-45<br>(Data) | 3.0         | U      |

\* Unshielded=U, Shielded=S


## 1.7 E.U.T Operating Mode(s)

| Test Mode | operating                   |
|-----------|-----------------------------|
| PoE       | E.U.T Monitoring, Ping Test |

| E.U.T Test operating S/W |         |                          |
|--------------------------|---------|--------------------------|
| Name                     | Version | Manufacture Company      |
| Webviewer                | -       | Hanwha Techwin Co., Ltd. |

## 1.8 Configuration

■ AC Main  
□ DC Main

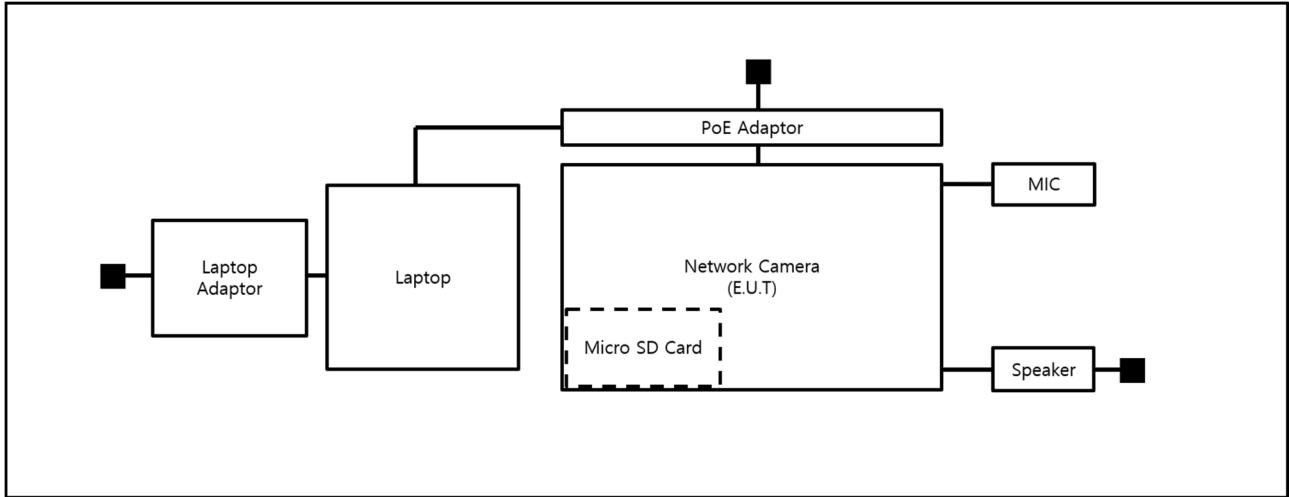

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## 1.9 Remarks when standards applied

N/A







## 1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

## 1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4:2014 and CISPR 16-1-4:2012

## 1.12 Laboratory Accreditations and Listings

| Country       | Agency         | Scope of Accreditation   | Logo  |
|---------------|----------------|--|---|
| KOREA         | <b>RRA</b>     | EMI (3 m & 10 m Semi-Anechoic Chamber ,<br>10 m Open Area and conducted test site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS,<br>Magnetic, Dips and interruptions)                                 | <br>KR0100                            |
| International | <b>KOLAS</b>   | EMI (3 m & 10 m Semi-Anechoic Chamber , and conducted test site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS,<br>Magnetic, Dips and interruptions)   | <br>KT489                            |
| USA           | <b>FCC</b>     | 3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.   | <br>KR0100                           |
| Canada        | <b>ISED</b>    | 3 m & 10 m Semi-Anechoic Chamber and Conducted test site   | <br>23298-1                          |
| JAPAN         | <b>VCCI</b>    | Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz | <br>R-4308, C-4798,<br>T-2311, G-914 |
| Europe        | <b>TÜV SÜD</b> | EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site)<br>EMS (ESD, RS, EFT/Burst, Surge, CS,<br>Magnetic, Dips and interruptions)                                    | <br>CARAT 17 07 01633<br>001         |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## 2.0 Test Regulations

The emissions tests were performed according to following regulations:

**EMC – Directive 2014/30/EU**

EN 61000-6-3:2011

EN 61000-6-1:2007

EN 61000-6-4:2007 +A1:2011

EN 61000-6-2:2005

EN 55011:2007 +A1:2010

Group 1

Group 2

Class A

Class B

EN 55014-1:2006 +A2:2011

EN 55014-2:1997 +A2:2008

EN 55015:2013

EN 61547:2009

EN 55032:2012/AC:2013

Class A

Class B

EN 55024:2010 +A1:2015

EN 50130-4:2011

EN 61000-3-2:2014

EN 61000-3-3:2013

EN 61326-1:2013



- 
- |   |                                  |                                  |
|---|----------------------------------|----------------------------------|
| <input type="checkbox"/> <b>VCCI V-3 / 2015.04</b>            | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> <b>AS/NZS CISPR22:2009 +A1:2010</b>  | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> <b>47 CFR Part 15, Subpart B</b>     |                                  |                                  |
| <input type="checkbox"/> CISPR 22:2009 +A1:2010               | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> ANSI C63.4-2009                      |                                  |                                  |
| <input type="checkbox"/> <b>IC Regulation ICES-003 : 2016</b> |                                  |                                  |
| <input type="checkbox"/> CAN/CSA CISPR 22-10                  | <input type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> ANSI C63.4-2014                      |                                  |                                  |
| <input type="checkbox"/> <b>RE- Directive 2014/53/EU</b>      |                                  |                                  |
| <input type="checkbox"/> EN 301 489-1 V1.9.2                  |                                  |                                  |
| <input type="checkbox"/> Equipment for fixed use              |                                  |                                  |
| <input type="checkbox"/> Equipment for vehicular use          |                                  |                                  |
| <input type="checkbox"/> Equipment for portable use           |                                  |                                  |
| <input type="checkbox"/> EN 301 489-3 V1.6.1                  |                                  |                                  |
| <input type="checkbox"/> EN 301 489-17 V2.2.1                 |                                  |                                  |
| <input type="checkbox"/> EN 60945:2002                        |                                  |                                  |

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## 2.1 Conducted Emissions at Mains Power Ports

### Test Date

N/A

### Test Location

Electro wave Shieldroom

### Test Equipment

| Used                     | Description       | Model Number | Manufacturer | Serial Number | Cal. Due     |
|--------------------------|-------------------|--------------|--------------|---------------|--------------|
| <input type="checkbox"/> | EMI Test S/W      | EMC32        | R & S        | 9.12.00       | -            |
| <input type="checkbox"/> | EMI TEST RECEIVER | ESR3         | R & S        | 101781        | 04, 27, 2018 |
| <input type="checkbox"/> | LISN              | ENV216       | R & S        | 101787        | 01, 11, 2018 |
| <input type="checkbox"/> | LISN              | ESH2-Z5      | R & S        | 100450        | 04, 27, 2018 |
| <input type="checkbox"/> | PULSE LIMITER     | ESH3-Z2      | R & S        | 101915        | 11, 27, 2018 |
| <input type="checkbox"/> | LISN              | NNBM8124     | SCHWARZBECK  | 8124-1002     | 08, 07, 2018 |
| <input type="checkbox"/> | LISN              | NNBM8124     | SCHWARZBECK  | 8124-1003     | 08, 07, 2018 |

### Test Conditions

Temperature:

°C

Relative Humidity:

% R.H.

.

### Frequency Range of Measurement

150 kHz to 30 MHz

### Instrument Settings

IF Band Width: 9 kHz

### Test Results

The requirements are:

- PASS  
 NOT PASS  
 NOT APPLICABLE

### Remarks

N/A

## 2.2 Conducted Emissions at Telecommunication Ports

### Test Date

Jan. 03, 2018

### Test Location

Electro wave Shieldroom#6

### Test Equipment

| Used                                | Description       | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|-------------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMI Test S/W      | EMC32        | R & S        | 9.12.00       | -            |
| <input checked="" type="checkbox"/> | EMI TEST RECEIVER | ESR3         | R & S        | 101781        | 04, 27, 2018 |
| <input checked="" type="checkbox"/> | LISN              | ENV216       | R & S        | 101787        | 01, 11, 2018 |
| <input checked="" type="checkbox"/> | LISN              | ESH2-Z5      | R & S        | 100450        | 04, 27, 2018 |
| <input checked="" type="checkbox"/> | PULSE LIMITER     | ESH3-Z2      | R & S        | 101915        | 11, 27, 2018 |
| <input checked="" type="checkbox"/> | 8-WIRE ISN CAT3,5 | ENY81        | R & S        | 100174        | 01, 11, 2018 |
| <input type="checkbox"/>            | 8-WIRE ISN CAT6   | ENY81-CAT6   | R & S        | 101665        | 01, 11, 2018 |

### Test Conditions

Temperature: 23,1 °C  
Relative Humidity: 40,9 % R.H.

### Frequency Range of Measurement

150 kHz to 30 MHz

### Instrument Settings

IF Band Width: 9 kHz

### Test Results

The requirements are:

- PASS
- NOT PASS
- NOT APPLICABLE

### Remarks

See Appendix A for test data.

## 2.3 Radiated Electric Field Emissions(Below 1 GHz)

### Test Date

Jan. 04, 2018

### Test Location

OPEN AREA TEST SITE #2       SEMI ANECHOIC CHAMBER #4(10m)

### Test Equipment

| Used                                | Description              | Model Number | Manufacturer     | Serial Number | Cal. Due     |
|-------------------------------------|--------------------------|--------------|------------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMI Test S/W             | EP5/RE       | TOYO Corporation | 6.0.0         | -            |
| <input checked="" type="checkbox"/> | EMI TEST RECEIVER        | ESU26        | R & S            | 100551        | 04, 18, 2018 |
| <input checked="" type="checkbox"/> | AMPLIFIER                | SCU 01       | R & S            | 100603        | 11, 27, 2018 |
| <input checked="" type="checkbox"/> | TRILOG-BROADBAND ANTENNA | VULB9163     | Schwarzbeck      | 716           | 11, 28, 2018 |

### Test Conditions

Temperature: 23,8 °C  
Relative Humidity: 41,9 % R.H.

### Frequency Range of Measurement

30 MHz to 1 GHz

### Instrument Settings

IF Band Width: 120 kHz

### Test Results

The requirements are:

- PASS  
 NOT PASS  
 NOT APPLICABLE

### Remarks

See Appendix A for test data.

## 2.4 Radiated Electric Field Emissions(Above 1 GHz)

### Test Date

Jan. 04, 2018

### Test Location

SEMI ANECHOIC CHAMBER #3

### Test Equipment

| Used                                | Description                | Model Number | Manufacturer     | Serial Number | Cal. Due     |
|-------------------------------------|----------------------------|--------------|------------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMI Test S/W               | EP5/RE       | TOYO Corporation | 6.0.0         | -            |
| <input checked="" type="checkbox"/> | EMI TEST RECEIVER          | ESR7         | R & S            | 101190        | 08, 07, 2018 |
| <input checked="" type="checkbox"/> | PREAMPLIFIER               | 8449B        | AGILENT          | 3008A01967    | 05, 31, 2018 |
| <input type="checkbox"/>            | ATTENUATOR                 | 8491A        | HP               | 32173         | 03, 24, 2018 |
| <input checked="" type="checkbox"/> | DOUBLE RIDGED HORN ANTENNA | SAS-571      | A.H.SYSTEM,INC   | 781           | 05, 02, 2019 |

### Test Conditions

Temperature: 22,8 °C  
Relative Humidity: 41,5 % R.H.

### Frequency Range of Measurement

1 GHz to 6 GHz

### Instrument Settings

IF Band Width: 1 MHz

### Test Results

The requirements are:

- PASS
- NOT PASS
- NOT APPLICABLE

### Remarks

See Appendix A for test data.







### **3.0 Criteria for compliance**

Criteria for compliance was based on the following guidelines:

EN 50130-4:2011 Alarm systems-Part 4: Electromagnetic compatibility Product family standard: Immunity requirements for components of fire, intruder and social alarm systems

**The variety and the diversity of the apparatus within the scope of this document makes it**

**difficult to define precise criteria for the evaluation of the immunity test results.**

**If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.**

**A functional description and a definition of performance by the manufacture and noted in the test**

**report, based on the following criteria:**

#### **Electrostatic discharge**

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

#### **Radiated electromagnetic fields**

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.

---

**Fast transient burst / slow high energy voltage surge**

There shall be no damage, malfunction or change of status due to the conditioning.  
Flickering of an indicator during the application of discharge is permissible, providing  
That there is no residual is permissible, providing that there is no residual change in the EUT or  
any  
change in outputs, which could be interpreted by associated equipment as a change.

**Conducted RF immunity**

There shall be no damage, malfunction or change of status due to the conditioning.  
Flickering of an indicator during the application of discharge is permissible, providing  
That there is no residual is permissible, providing that there is no residual change in the EUT or  
any  
change in outputs, which could be interpreted by associated equipment as a change,  
and no such flickering of indicators oeuvres at  $U = 130 \text{ dB}\mu\text{V}$ .  
For component of CCTV systems, where the status is monitored by observing the TV picture,  
then deterioration of the picture is allowed at  $U = 140 \text{ dB}\mu\text{V}$ , providing:  
(a) there is no permanent damage or change to the EUT  
(e.g. no corruption of memory or changes to programmable settings etc.)  
(b) at  $U = 130 \text{ dB}\mu\text{V}$ , any deterioration of the picture is so minor that the system could  
still be used; and  
(c) there in no observable deterioration of the picture at  $U = 120 \text{ dB}\mu\text{V}$ .

**Voltage dip/interruption / Voltage variation**

There shall be no damage, malfunction or change of status due to the conditioning.  
Flickering of an indicator during the conditioning is permissible, providing that there is no  
residual  
change in the EUT or any change in outputs, which could be interpreted by associated  
equipment  
as a change. The EUT shall meet the acceptance criteria for the functional test, after the  
conditioning.

### 3.1 Electrostatic Discharge

**Reference Standard**

EN 61000-4-2:2009

**Test Date**

Jan. 02, 2018

**Test Location**

EMS-ESD: Electro wave Shieldroom#7

**Test Equipment**

| Used                                | Description   | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|---------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | ESD SIMULATOR | ESS-2000     | Noise Ken    | ESS01Z0454    | 10, 11, 2018 |
| <input checked="" type="checkbox"/> | HCP           | -            | KES          | -             | -            |
| <input checked="" type="checkbox"/> | VCP           | -            | KES          | -             | -            |

**Test Conditions**

Temperature: 22,5 °C  
Relative Humidity: 42,1 % R.H.  
Atmospheric Pressure: 101,0 kPa

**Test Specifications**

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative



Number of Discharge: 10 at all locations for Air discharge  
10 at all locations for Contact discharge

|                    |  |  |  |  |
|--------------------|--|--|--|--|
| Discharge Voltage: | Contact                                  | Air                                      | HCP                                      | VCP                                      |
|                    | <input type="checkbox"/> 2 kV            | <input checked="" type="checkbox"/> 2 kV | <input type="checkbox"/> 2 kV            | <input type="checkbox"/> 2 kV            |
|                    | <input type="checkbox"/> 4 kV            | <input checked="" type="checkbox"/> 4 kV | <input type="checkbox"/> 4 kV            | <input type="checkbox"/> 4 kV            |
|                    | <input checked="" type="checkbox"/> 6 kV | <input type="checkbox"/> 6 kV            | <input checked="" type="checkbox"/> 6 kV | <input checked="" type="checkbox"/> 6 kV |
|                    | <input type="checkbox"/> 8 kV            | <input checked="" type="checkbox"/> 8 kV | <input type="checkbox"/> 8 kV            | <input type="checkbox"/> 8 kV            |
|                    | <input type="checkbox"/> 15 kV           | <input type="checkbox"/> 15 kV           | <input type="checkbox"/> 15 kV           | <input type="checkbox"/> 15 kV           |

Notes: HCP: Horizontal coupling plane  
VCP: Vertical coupling plane

Required Performance Criteria:  Complied

**Location of Discharge:**

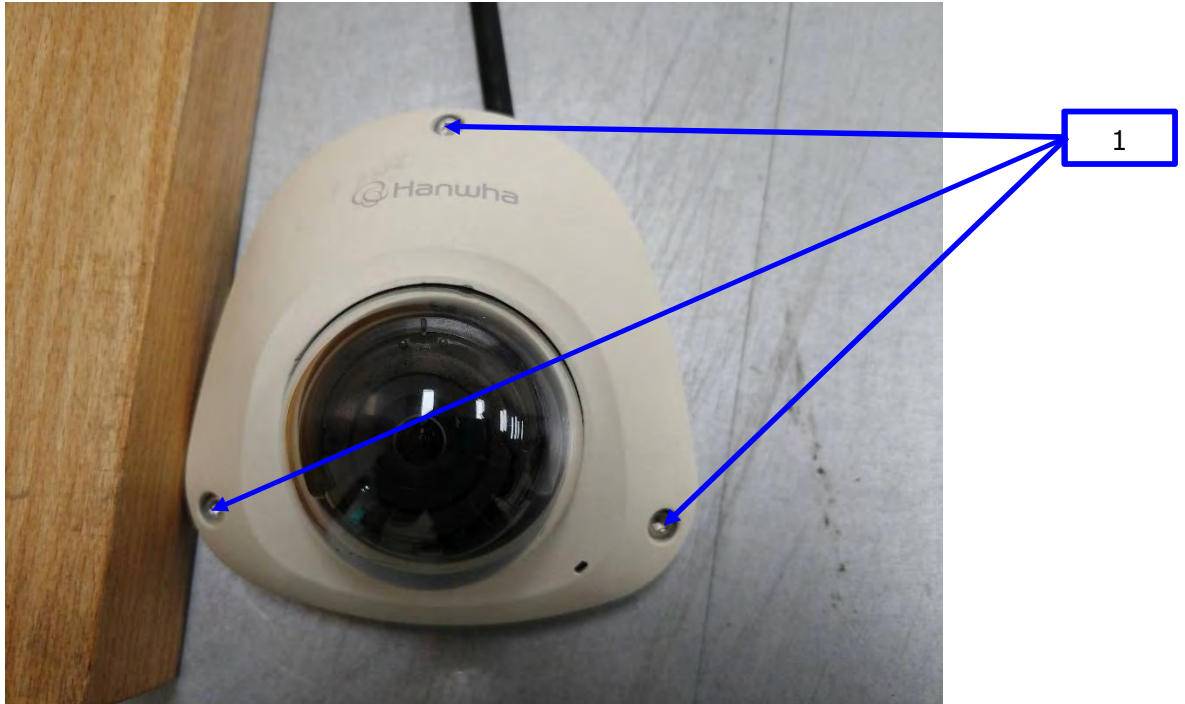

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## Test Data

### Indirect Discharge

| No. | Test Point  | Discharge Method  | Observations | Remarks |
|-----|-------------|-------------------|--------------|---------|
| 1   | HCP Contact | Contact Discharge | Complied     | -       |
| 2   | VCP Contact | Contact Discharge | Complied     | -       |

### Direct Discharge

| No. | Test Point | Discharge Method  | Observations | Remarks |
|-----|------------|-------------------|--------------|---------|
| 1   | screw      | Contact Discharge | Complied     | -       |

Note: "Blank" = Not performed

Observations:  
Complied – No degradation of function

### Test Results

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria

### Remarks

PASS Required Performance Criteria.

## 3.2 Radiated Electric Field Immunity

### Reference Standard

EN 61000-4-3:2006 +A2:2010

### Test Date

Jan. 04, 2018

### Test Location

EMS-RS:  SEMI ANECHOIC CHAMBER #2       SEMI ANECHOIC CHAMBER #3

### Test Equipment

| Used                                | Description                     | Model Number    | Manufacturer   | Serial Number | Cal. Due     |
|-------------------------------------|---------------------------------|-----------------|----------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMS Test S/W                    | EMC32           | R & S          | 10.10.02      | -            |
| <input checked="" type="checkbox"/> | SIGNAL GENERATOR                | SMB 100A        | R & S          | 177586        | 08, 07, 2018 |
| <input checked="" type="checkbox"/> | BROADBAND AMPLIFIER             | BBA100          | R & S          | 101239        | 08, 07, 2018 |
| <input checked="" type="checkbox"/> | BROADBAND AMPLIFIER             | 100S1G6M1       | AR             | 579931        | 08, 07, 2018 |
| <input checked="" type="checkbox"/> | POWER METER                     | NRP2            | R & S          | 103475        | 08, 07, 2018 |
| <input checked="" type="checkbox"/> | AVG POWER SENSOR                | NRP-Z91         | R & S          | 102526        | 08, 07, 2018 |
| <input checked="" type="checkbox"/> | AVG POWER SENSOR                | NRP-Z91         | R & S          | 102527        | 08, 07, 2018 |
| <input checked="" type="checkbox"/> | STACKED DOUBLE LOG-PER- ANTENNA | STPL9128 E      | Schwarzbeck    | 9128ES-121    | -            |
| <input checked="" type="checkbox"/> | DIRECTIONAL COUPLER             | KYDC-D1070-DX40 | KY TELECOM     | KY150001      | 08, 07, 2018 |
| <input checked="" type="checkbox"/> | DOUBLE RIDGED HORN ANTENNA      | SAS-571         | A.H.SYSTEM,INC | 781           | 05, 02, 2019 |
| <input checked="" type="checkbox"/> | SOUND ACOUSTIC TESTER           | TST-1000        | TESTEK         | 150045        | 11, 02, 2018 |
| <input checked="" type="checkbox"/> | MICROPHONE                      | MP201           | BSWA           | 520963        | 11, 10, 2018 |

### Test Conditions

Temperature: 22,8 °C  
 Relative Humidity: 41,5 % R.H.  
 Atmospheric Pressure: 101,7 kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr



### Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance:  3 m

Field Strength:  1 V/m  3 V/m  
 10 V/m

Frequency Range:  80 MHz to 1 GHz  1,4 GHz to 2,7 GHz  
 80 MHz to 2,7 GHz

Modulation:  AM, 80 %, 1 kHz sine wave  
 PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step:  1 % step

Dwell Time:  1 s  3 s

# of Sides Radiated:  4

Required Performance Criteria:  Complied





---

## Test Data

| Side Exposed | Observations |          |
|--------------|--------------|----------|
|              | Horizontal   | Vertical |
| Front        | Complied     | Complied |
| Right        | Complied     | Complied |
| Back         | Complied     | Complied |
| Left         | Complied     | Complied |

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

### Test Results

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria

### Remarks

PASS Required Performance Criteria.

### 3.3 Electrical Fast Transients/Bursts

**Reference Standard**

EN 61000-4-4:2012

**Test Date**

Jan. 02, 2018

**Test Location**

EMS-EFT: Electro wave Shieldroom#3

**Test Equipment**

| Used                                | Description               | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|---------------------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMS Test S/W              | iec.control  | AMETEK CTS   | 7.1.2         | -            |
| <input checked="" type="checkbox"/> | ULTRA COMPACT SIMULATOR   | UCS 500 N5   | EM TEST      | V0936105120   | 06, 26, 2018 |
| <input checked="" type="checkbox"/> | MOTOR VARIAC              | MV2616       | EM TEST      | V0936105123   | 06, 26, 2018 |
| <input checked="" type="checkbox"/> | CAPACITIVE COUPLING CLAMP | HFK          | EM TEST      | 070925        | 06, 26, 2018 |

**Test Conditions**

Temperature: 22,5 °C  
Relative Humidity: 42,1 % R.H.  
Atmospheric Pressure: 101,0 kPa

**Test Specifications**

Pulse Amplitude & Polarity:  ± 1.0 kV  ± 2.0 kV  
(AC Power Lines)  ± 4.0 kV

Pulse Amplitude & Polarity:  ± 0.5 kV  ± 1.0 kV  
(Other supply / Signal Lines)  ± 2.0 kV

Burst Period:  300 ms  2 s

Repetition Rate:  5 kHz  100 kHz

Duration of Test Voltage:  ≥ 1 min

Required Performance Criteria:  Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



**Test Data**

Input a.c. power ports – Coupling/Decoupling Network used

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Burst (kV) | (-) Burst (kV) |
| -                   | -              | -              |

Input d.c. power ports – Coupling/Decoupling Network used

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Burst (kV) | (-) Burst (kV) |
| -                   | -              | -              |

Signal ports and telecommunication ports – Coupling Clamp used

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Burst (kV) | (-) Burst (kV) |
| RJ-45               | Complied       | Complied       |

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

**Test Results**

PASS Required Performance Criteria

NOT PASS Required Performance Criteria

**Remarks**

PASS Required Performance Criteria.



### 3.4 Surge Transients

#### Reference Standard

EN 61000-4-5:2014

#### Test Date

N/A

#### Test Location

EMS-Surge: Electro wave Shieldroom

#### Test Equipment

| Used                     | Description             | Model Number | Manufacturer | Serial Number | Cal. Due     |
|--------------------------|-------------------------|--------------|--------------|---------------|--------------|
| <input type="checkbox"/> | EMS Test S/W            | iec.control  | EM TEST      | 5.4.7         | -            |
| <input type="checkbox"/> | ULTRA COMPACT SIMULATOR | UCS 500N7    | EM TEST      | P1608172950   | 11, 27, 2018 |
| <input type="checkbox"/> | MOTOR VARIAC            | MV2616       | EM TEST      | P1552169719   | 11, 27, 2018 |
| <input type="checkbox"/> | CDN                     | CNV 508N1    | EM TEST      | P1610176296   | 11, 28, 2018 |
| <input type="checkbox"/> | CDN                     | CNV 504N7.3  | EM TEST      | P1744207079   | 12, 18, 2018 |

#### Test Conditions

Temperature: °C  
Relative Humidity: % R.H.  
Atmospheric Pressure: kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



---

## Test Specifications

### AC Power Lines

Source Impedance: 12 ohm for common Mode and 2 ohm for differential Mode

Surge Amplitude : Common Mode  
 (0,5 / 1,0 / 2,0) kV  
Differential Mode  
 (0,5 / 1,0) kV

Number of Surges:  5 surges per angle

Angle:  0°, 90°, 180°, 270° (input a.c. power port)

Polarity:  Positive & Negative

Repetition Rate:  1 surge per min  1 surge per 30 sec.

Required Performance Criteria:  Complied

### Other supply / Signal Lines

Source Impedance: 42 ohm for common Mode

Surge Amplitude: Common Mode  
 (0,5 / 1,0) kV

Number of Surges:  5 Surges

Polarity:  Positive & Negative

Repetition Rate:  1 surge per min  1 surge per 30 sec.

Required Performance Criteria:  Complied



---

### Test Data

Line to Earth – Common Mode

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Surge (kV) | (-) Surge (kV) |
| -                   | -              | -              |

### Signal Lines

Line to Earth – Common Mode

| Mode of Application | Observations   |                |
|---------------------|----------------|----------------|
|                     | (+) Surge (kV) | (-) Surge (kV) |
| -                   | -              | -              |

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

### Test Results

PASS Required Performance Criteria

NOT PASS Required Performance Criteria

### Remarks

N/A

### 3.5 Conducted Disturbance

**Reference Standard**

EN 61000-4-6:2014

**Test Date**

Jan. 03, 2018

**Test Location**

EMS-CS: Electro wave Shieldroom #6

**Test Equipment**

| Used                                | Description               | Model Number | Manufacturer | Serial Number | Cal. Due     |
|-------------------------------------|---------------------------|--------------|--------------|---------------|--------------|
| <input checked="" type="checkbox"/> | EMS Test S/W              | icd.control  | EM TEST      | 5.3.11        | -            |
| <input checked="" type="checkbox"/> | CONTINUOUS WAVE SIMULATOR | CWS 500N1.4  | EM TEST      | P1602169880   | 11, 27, 2018 |
| <input checked="" type="checkbox"/> | ATTENUATOR                | ATT 6/80     | EM TEST      | P1614178148   | 11, 27, 2018 |
| <input checked="" type="checkbox"/> | CDN                       | CDN M016     | TESEQ        | 43694         | 11, 27, 2018 |
| <input type="checkbox"/>            | CDN                       | CDN M016     | TESEQ        | 43697         | 11, 27, 2018 |
| <input checked="" type="checkbox"/> | CDN                       | CDN T800     | TESEQ        | 42800         | 11, 27, 2018 |
| <input type="checkbox"/>            | EM CLAMP                  | KEMZ 801A    | TESEQ        | 44099         | 11, 28, 2018 |
| <input checked="" type="checkbox"/> | SOUND ACOUSTIC TESTER     | TST-1000     | TESTEK       | 150045        | 11, 02, 2018 |
| <input checked="" type="checkbox"/> | MICROPHONE                | MP201        | BSWA         | 520963        | 11, 10, 2018 |

**Test Conditions**

Temperature: 23,1 °C  
Relative Humidity: 40,9 % R.H.  
Atmospheric Pressure: 101,2 kPa

**Test Specifications**

Frequency range:  150 kHz to 100 MHz  150 kHz to 80 MHz

Voltage Level:  1 Vrms  3 Vrms  
 10 Vrms

Modulation:  AM, 80 %, 1 kHz sine wave  
 PM, 1 Hz (0,5 s ON : 0,5 s OFF)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-18T0070-R1  
Page (32) of (56)

---

Frequency step:  1 % step  
Dwell Time:  1 s  3 s  
Required Performance Criteria:  Complied

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr





**Test Data**

Input a.c. power ports

| Coupling Location<br>(Line Stressed) | Coupling Method   | Observations |
|--------------------------------------|---|--------------|
| -                                    | CDN ( <input type="checkbox"/> M2, <input type="checkbox"/> M3) | -            |

Input d.c. power ports

| Coupling Location<br>(Line Stressed) | Coupling Method   | Observations |
|--------------------------------------|---|--------------|
| -                                    | CDN ( <input type="checkbox"/> M2, <input type="checkbox"/> M3) | -            |

Signal ports and telecommunication ports

| Coupling Location<br>(Line Stressed) | Coupling Method | Observations |
|--------------------------------------|-----------------|--------------|
| RJ-45                                | CDN T800        | Complied     |

Notes: CDN = Coupling Decoupling Network  
"blank" = Not performed

Observations:  
Complied – No degradation of function

**Test Results**

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria

**Remarks**

PASS Required Performance Criteria.



### 3.6 Voltage Dips and Short Interruptions

**Reference Standard**

EN 61000-4-11:2004

**Test Date**

N/A

**Test Location**

EMS-Voltage dip: Electro wave Shieldroom

**Test Equipment**

| Used                     | Description             | Model Number | Manufacturer | Serial Number | Cal. Due     |
|--------------------------|-------------------------|--------------|--------------|---------------|--------------|
| <input type="checkbox"/> | EMS Test S/W            | iec.control  | EM TEST      | 5.4.7         | -            |
| <input type="checkbox"/> | ULTRA COMPACT SIMULATOR | UCS 500N7    | EM TEST      | P1608172950   | 11, 27, 2018 |
| <input type="checkbox"/> | MOTOR VARIAC            | MV2616       | EM TEST      | P1552169719   | 11, 27, 2018 |

**Test Conditions**

Temperature: °C  
Relative Humidity: % R.H.  
Atmospheric Pressure: kPa

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



---

## Test Specifications & Observations/Remarks

(Test Voltage : V)

| <u>Test Level</u>                  | <u>Duration [in period/ms (50 Hz)]</u> | <u>Results</u> |
|------------------------------------|--|----------------|
| <input type="checkbox"/> 20 % dip  | <input type="checkbox"/> 250 / 5 000   | <u>N/A</u>     |
| <input type="checkbox"/> 30 % dip  | <input type="checkbox"/> 25 / 500      | <u>N/A</u>     |
| <input type="checkbox"/> 60 % dip  | <input type="checkbox"/> 10 / 200      | <u>N/A</u>     |
| <input type="checkbox"/> 100 % dip | <input type="checkbox"/> 250 / 5 000   | <u>N/A</u>     |

- Voltage variations

|                                      |                                       |            |
|--------------------------------------|---------------------------------------|------------|
| <input type="checkbox"/> Unom + 10 % | <input type="checkbox"/> 253.0 V (ac) | <u>N/A</u> |
| <input type="checkbox"/> Unom - 15 % | <input type="checkbox"/> 195.5 V (ac) | <u>N/A</u> |

Observations:

Complied – No degradation of function

### Test Results

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria
- NOT APPLICABLE

### Remarks

N/A



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-18T0070-R1  
Page (36) of (56)

---

## **APPENDIX A – TEST DATA**

### **Conducted Emissions at Mains Power Ports**

**[HOT]**

N/A

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-18T0070-R1  
Page (37) of (56)

---

[ NEUTRAL ]

N/A

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

---


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## Conducted Emissions at Telecommunication Ports

[10 Mbps]

### Common Information

|                   |                            |
|-------------------|----------------------------|
| Test Description: | Telecommunication Emission |
| Model No.:        | XNV-6012MP                 |
| Mode:             | PoE_10 Mbps                |
| Operator Name:    | KES                        |

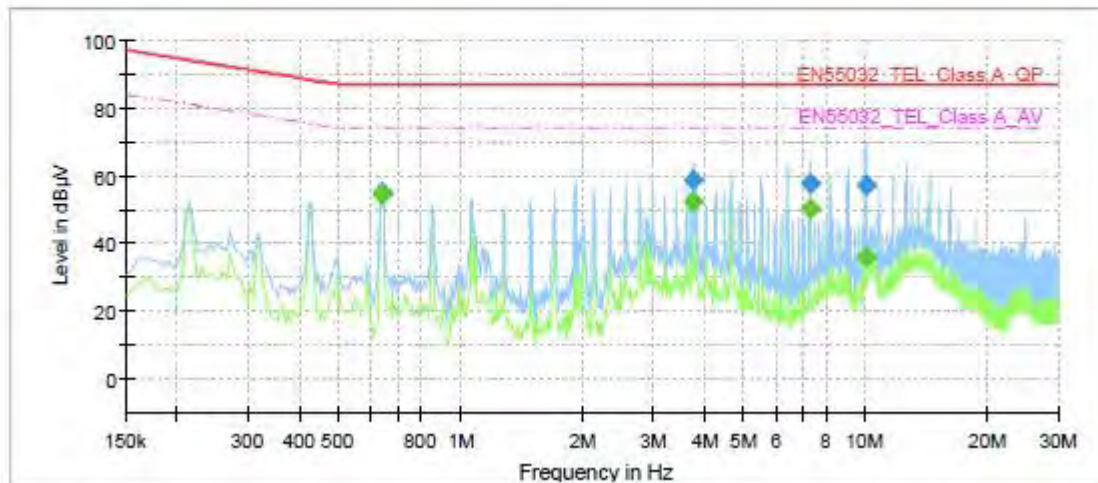

### Final Result


| Frequency (MHz) | QuasiPeak (dBµV) | CAverage (dBµV) | Limit (dBµV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line        | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|-------------|------------|
| 0.640000        | ---              | 54.36           | 74.00        | 19.64       | 1000.0          | 9.000           | Single Line | 19.7       |
| 0.640000        | 54.82            | ---             | 87.00        | 32.18       | 1000.0          | 9.000           | Single Line | 19.7       |
| 3.750000        | ---              | 52.58           | 74.00        | 21.42       | 1000.0          | 9.000           | Single Line | 19.7       |
| 3.750000        | 58.97            | ---             | 87.00        | 28.03       | 1000.0          | 9.000           | Single Line | 19.7       |
| 7.335000        | ---              | 50.39           | 74.00        | 23.61       | 1000.0          | 9.000           | Single Line | 19.4       |
| 7.335000        | 57.43            | ---             | 87.00        | 29.57       | 1000.0          | 9.000           | Single Line | 19.4       |
| 10.010000       | ---              | 35.99           | 74.00        | 38.01       | 1000.0          | 9.000           | Single Line | 19.8       |
| 10.010000       | 57.34            | ---             | 87.00        | 29.66       | 1000.0          | 9.000           | Single Line | 19.8       |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

**[100 Mbps]**

**Common Information**

|                   |                            |
|-------------------|----------------------------|
| Test Description: | Telecommunication Emission |
| Model No.:        | XNV-6012MP                 |
| Mode              | PoE_100 Mbps               |
| Operator Name:    | KES                        |

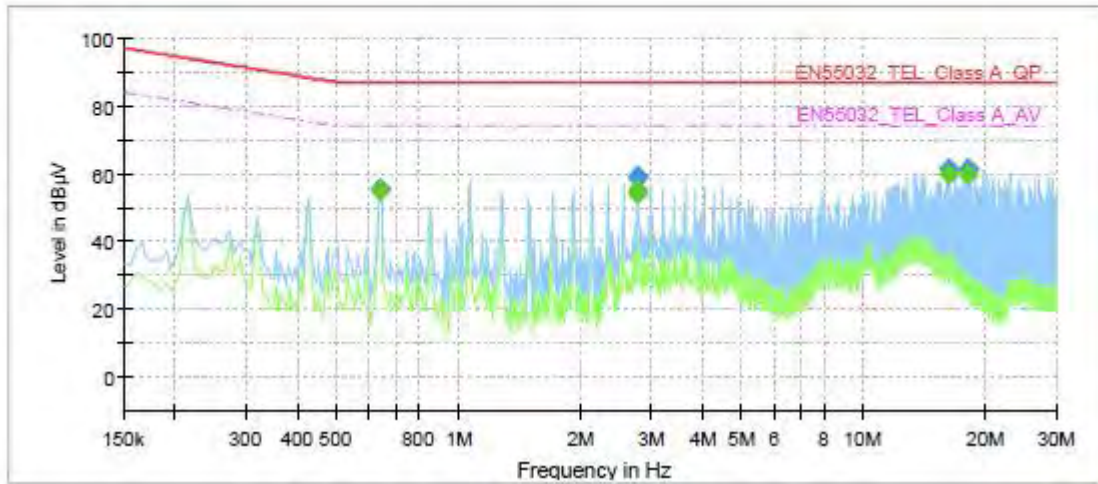

**Final Result**

| Frequency (MHz) | QuasiPeak (dBµV) | CAverage (dBµV) | Limit (dBµV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line        | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|-------------|------------|
| 0.640000        | ---              | 55.21           | 74.00        | 18.79       | 1000.0          | 9.000           | Single Line | 20.0       |
| 0.640000        | 55.42            | ---             | 87.00        | 31.58       | 1000.0          | 9.000           | Single Line | 20.0       |
| 2.775000        | ---              | 54.20           | 74.00        | 19.80       | 1000.0          | 9.000           | Single Line | 20.2       |
| 2.775000        | 58.59            | ---             | 87.00        | 28.41       | 1000.0          | 9.000           | Single Line | 20.2       |
| 2.780000        | ---              | 54.99           | 74.00        | 19.01       | 1000.0          | 9.000           | Single Line | 20.2       |
| 2.780000        | 59.53            | ---             | 87.00        | 27.47       | 1000.0          | 9.000           | Single Line | 20.2       |
| 16.230000       | ---              | 59.73           | 74.00        | 14.27       | 1000.0          | 9.000           | Single Line | 20.2       |
| 16.230000       | 61.18            | ---             | 87.00        | 25.82       | 1000.0          | 9.000           | Single Line | 20.2       |
| 18.245000       | ---              | 59.91           | 74.00        | 14.09       | 1000.0          | 9.000           | Single Line | 20.3       |
| 18.245000       | 61.19            | ---             | 87.00        | 25.81       | 1000.0          | 9.000           | Single Line | 20.3       |

◆ Calculation


QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

## Radiated Electric Field Emissions(Below 1 GHz)

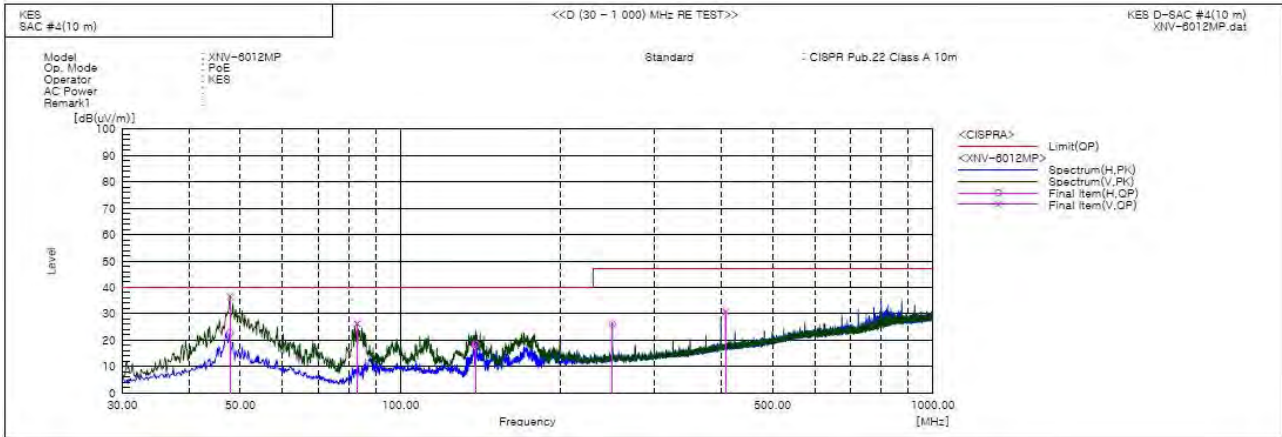

### Final Result

| No. | Frequency [MHz] | (P) | Reading QP [dB(uV)] | c.f [dB(1/m)] | Result QP [dB(uV/m)] | Limit QP [dB(uV/m)] | Margin QP [dB] | Height [cm] | Angle [deg] | Remark |
|-----|-----------------|-----|---------------------|---------------|----------------------|---------------------|----------------|-------------|-------------|--------|
| 1   | 47.803          | V   | 64.6                | -27.9         | 36.7                 | 40.0                | 3.3            | 267.0       | 341.0       |        |
| 2   | 47.824          | H   | 50.6                | -27.9         | 22.7                 | 40.0                | 17.3           | 100.0       | 150.0       |        |
| 3   | 82.865          | V   | 59.5                | -33.3         | 26.2                 | 40.0                | 13.8           | 150.0       | 250.0       |        |
| 4   | 138.398         | H   | 50.3                | -31.9         | 18.4                 | 40.0                | 21.6           | 400.0       | 3.0         |        |
| 5   | 249.948         | H   | 51.5                | -25.4         | 26.1                 | 47.0                | 20.9           | 400.0       | 142.0       |        |
| 6   | 408.421         | V   | 51.0                | -20.2         | 30.8                 | 47.0                | 16.2           | 100.0       | 225.0       |        |

### ◆ Calculation – SEMI ANECHOIC CHAMBER #4(10 m)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]


Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value





## Radiated Electric Field Emissions(Above 1 GHz)

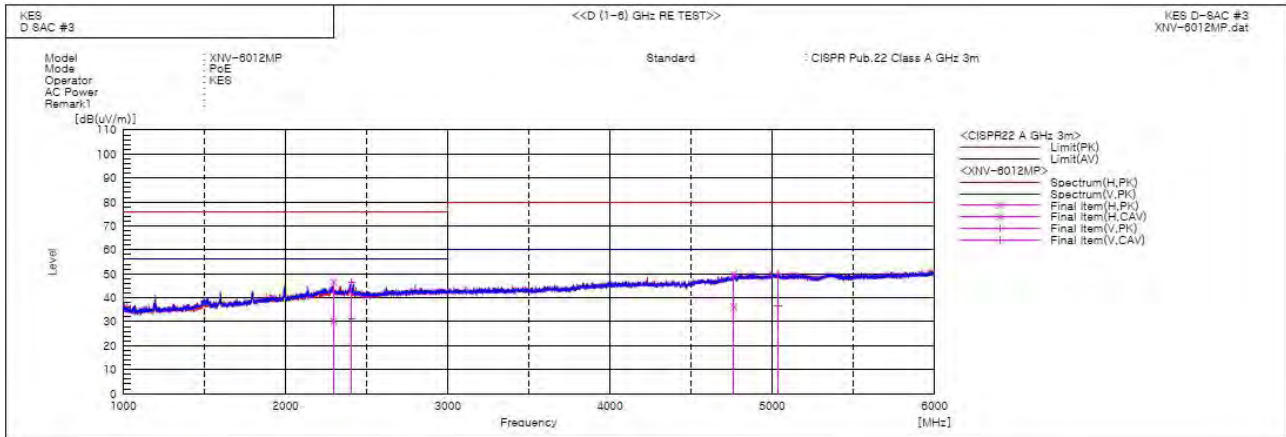

Final Result

| No. | Frequency [MHz] | (P) | Reading PK [dB(uV)] | Reading CAV [dB(uV)] | c.f [dB(1/m)] | Result PK [dB(uV/m)] | Result CAV [dB(uV/m)] | Limit PK [dB(uV/m)] | Limit AV [dB(uV/m)] | Margin PK [dB] | Margin CAV [dB] | Height [cm] | Angle [deg] | Remark |
|-----|-----------------|-----|---------------------|----------------------|---------------|----------------------|-----------------------|---------------------|---------------------|----------------|-----------------|-------------|-------------|--------|
| 1   | 2297.319        | H   | 46.8                | 30.4                 | -0.2          | 46.6                 | 30.2                  | 76.0                | 56.0                | 29.4           | 25.8            | 101.0       | 240.8       |        |
| 2   | 2409.202        | V   | 46.5                | 31.0                 | 0.2           | 46.7                 | 31.2                  | 76.0                | 56.0                | 29.3           | 24.8            | 101.0       | 253.9       |        |
| 3   | 4764.140        | H   | 40.5                | 26.8                 | 9.3           | 49.8                 | 36.1                  | 80.0                | 60.0                | 30.2           | 23.9            | 101.0       | 340.6       |        |
| 4   | 5035.192        | V   | 39.6                | 26.2                 | 10.5          | 50.1                 | 36.7                  | 80.0                | 60.0                | 29.9           | 23.3            | 101.0       | 234.5       |        |

### ◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



---

## Harmonic Current Emissions and Voltage Fluctuations and Flicker

| <b>Average harmonic current results</b> |                      |            |           |        |
|---|----------------------|------------|-----------|--------|
| Hn                                      | I <sub>eff</sub> [A] | % of Limit | Limit [A] | Result |
|   |                      | N/A        |           |        |

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



Test Data - Harmonics (continued)

**Maximum harmonic current results**

| Hn  | I <sub>eff</sub> [A] | % of Limit | Limit [A] | Result |
|-----|----------------------|------------|-----------|--------|
| N/A |                      |            |           |        |

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



Test Data - Voltage Fluctuations

**Maximum Flicker results**

|          | <b>EUT values</b> | <b>Limit</b> | <b>Result</b> |
|----------|-------------------|--------------|---------------|
| Pst      | N/A               |              |               |
| Plt      |                   |              |               |
| dc [%]   |                   |              |               |
| dmax [%] |                   |              |               |
| Tmax [s] |                   |              |               |

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-18T0070-R1  
Page (45) of (56)

---

## **Test Setup Photos and Configuration**

### **Conducted Voltage Emissions**

N/A

N/A

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact [shchoi@kes.co.kr](mailto:shchoi@kes.co.kr)

---


## Conducted Telecommunication Emissions



---


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact [shchoi@kes.co.kr](mailto:shchoi@kes.co.kr)

## Radiated Electric Field Emissions(Below 1 GHz)

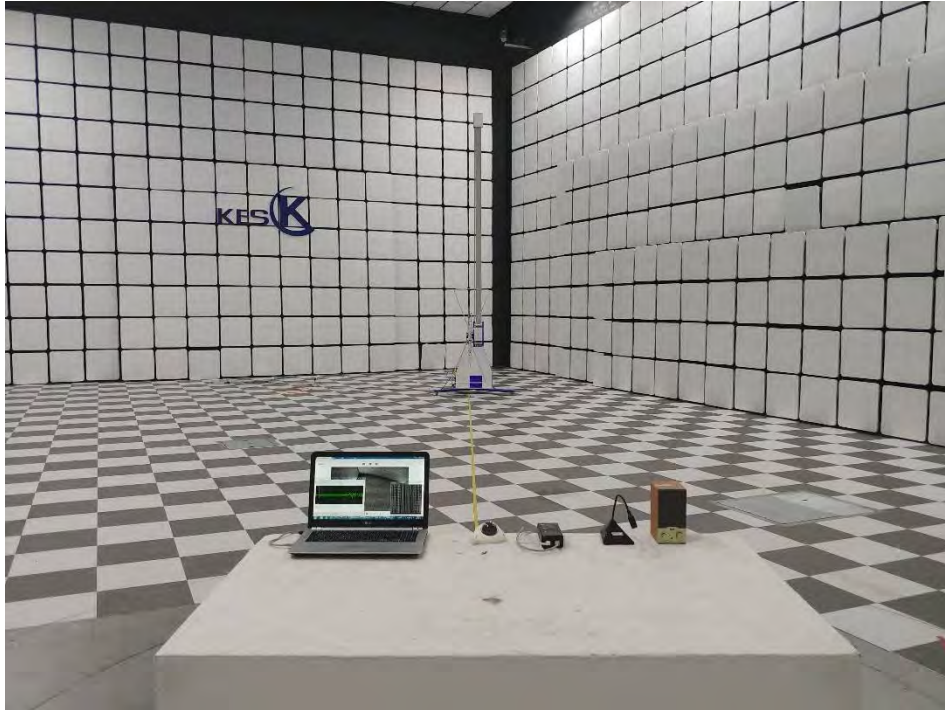

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact [shchoi@kes.co.kr](mailto:shchoi@kes.co.kr)

## Radiated Electric Field Emissions(Above 1 GHz)

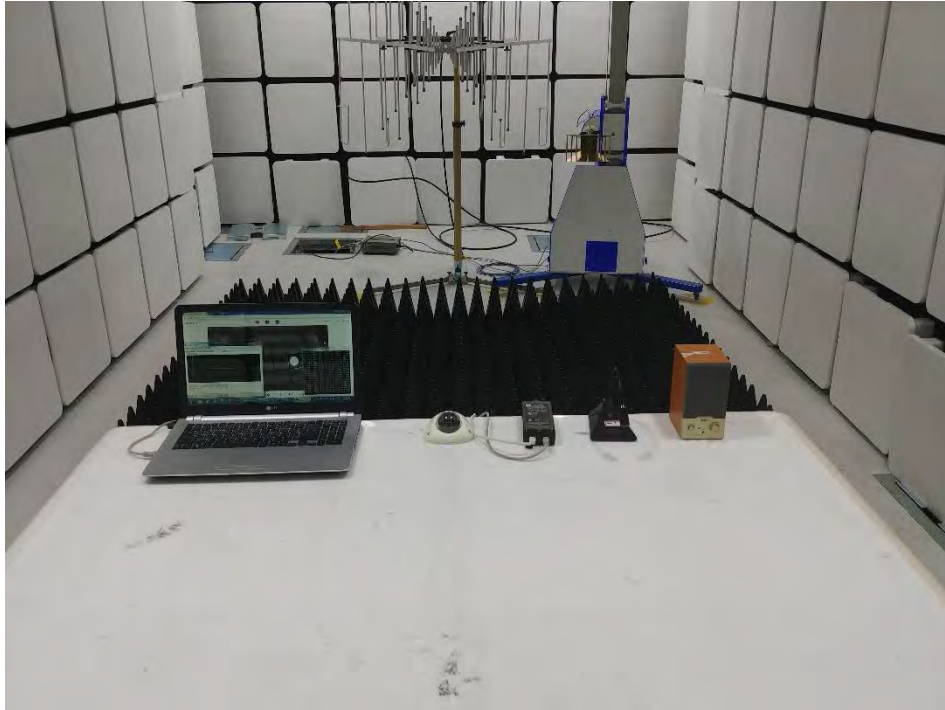

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact [shchoi@kes.co.kr](mailto:shchoi@kes.co.kr)





**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-18T0070-R1  
Page (49) of (56)

---

## Harmonic Current Emissions and Voltage Fluctuations and Flicker

N/A


---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact [shchoi@kes.co.kr](mailto:shchoi@kes.co.kr)

## Electrostatic Discharge



## Radiated Electric Field Immunity

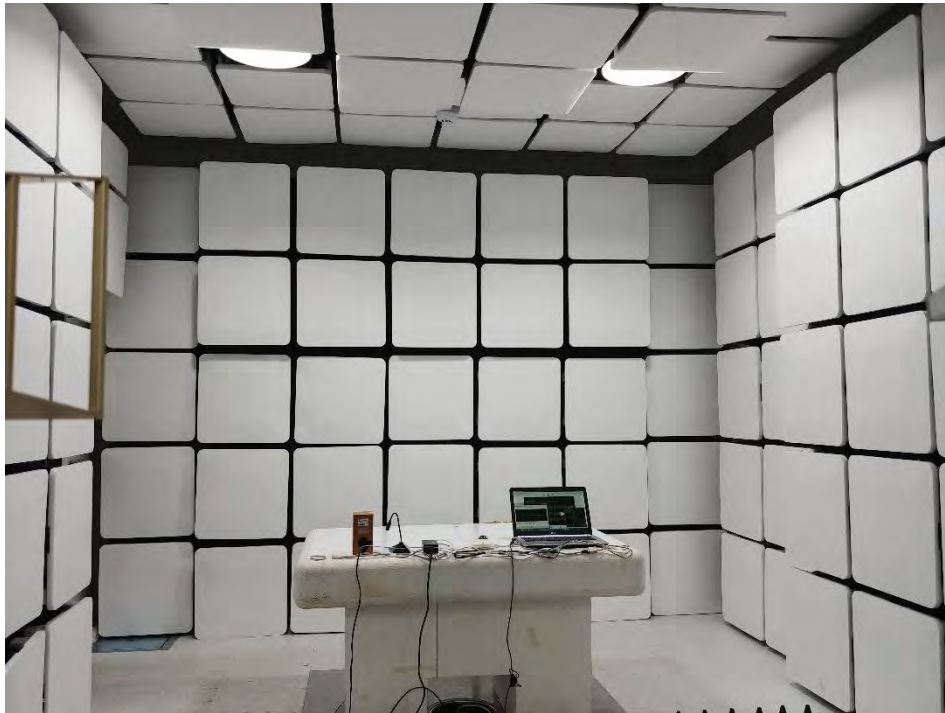

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact [shchoi@kes.co.kr](mailto:shchoi@kes.co.kr)

---

## Electrical Fast Transients/Bursts



### Surge Transients

N/A

---

## Conducted Disturbance



## Voltage Dips and Short Interruptions

N/A

---

## EUT External Photographs

(Top)



(Bottom)



---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact [shchoi@kes.co.kr](mailto:shchoi@kes.co.kr)

---

## EUT Internal Photographs

(Internal View)




---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact [shchoi@kes.co.kr](mailto:shchoi@kes.co.kr)

## EUT Internal View – board 1

(Top)

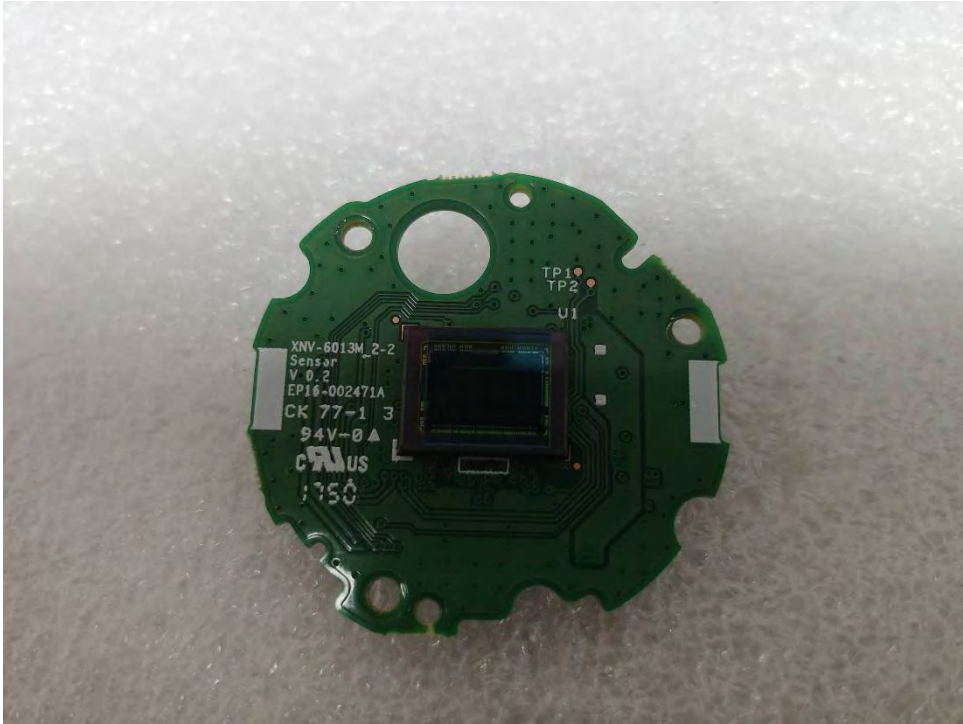

(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact [shchoi@kes.co.kr](mailto:shchoi@kes.co.kr)

## EUT Internal View – board 2

(Top)



(Bottom)

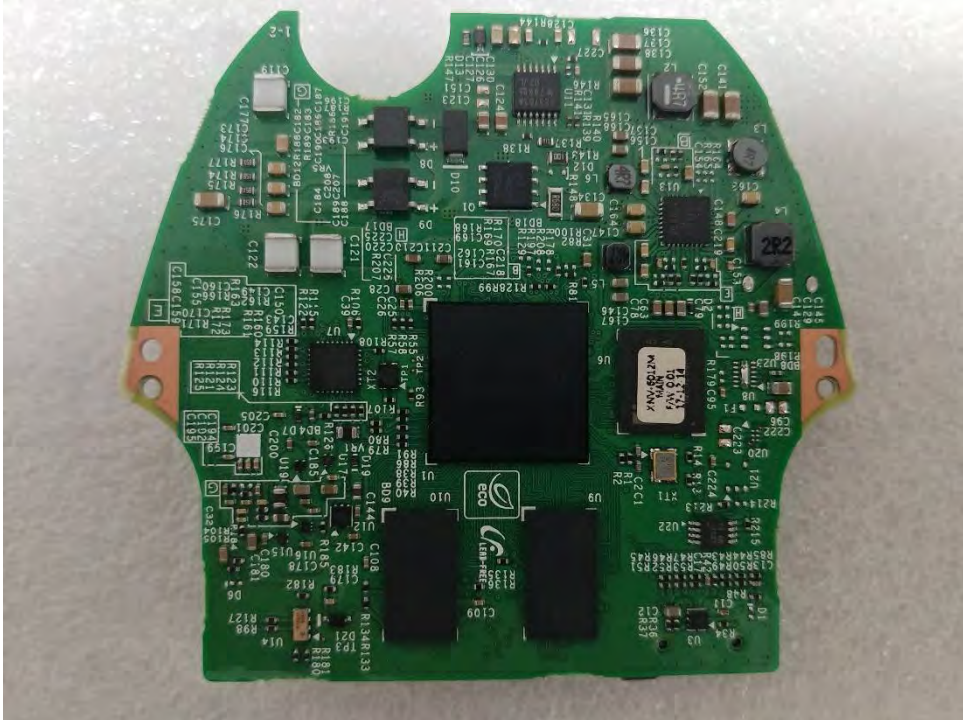

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact [shchoi@kes.co.kr](mailto:shchoi@kes.co.kr)



## Label and Location



### **Network Camera**

Model No : XNV-6012M

Manufacturer : Hanwha Techwin (Tianjin) Co.,Ltd.

Made in China

