

Report No .: KES-E2-19T0014 Page (1) of (65)

EMC TEST REPORT For CE

Test Report No.	:		KES-E2-19T0014	
Date of Issue	:	: Feb. 15, 2019		
Product name	:		NVR	
Model/Type No.	:		TRM-810S	
Variant Model	:		-	
Applicant	:		Hanwha Techwin Co., Ltd.	
Applicant Address	:		6, Pangyo-ro 319 Beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, 13488, KOREA	
Manufacturer	:	2.	D-TECH CO.,LTD. HANWHA TECHWIN(TIANJIN) CO., LTD HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.	
Manufacturer Address	:	2.	173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do, Korea (Suwon Industrial Complex) No.11 Weiliu Rd,Micro-Electronic Industrial Park, TEDA,Tianjin, 300385,People's Republic of China Lot O-2, Que Vo Industrial Zone extended area, Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam	
Date of Receipt	:		Dec. 18, 2018	
Test date	:		Jan. 19, 2019 ~ Jan. 24, 2019	
Test Results	:		☐ In Compliance ☐ Not in Compliance	
Tested by	~	/	Reviewed by	

1 4

Dae Hyun, Kim **EMC** Test Engineer

Dong-Hun, Jang

EMC Technical Manager

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Feb. 15, 2019	KES-E2-19T0014	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr

Report No.: KES-E2-19T0014 Page (3) of (65)

TABLE OF CONTENTS

1.0	General Product Description	. 5
1.1	Test Voltage & Frequency	. 7
1.2	Variant Model Differences	. 7
1.3	Device Modifications	. 7
1.4	Equipment Under Test	. 7
1.5	Support Equipments	
1.6	External I/O Cabling	
1.7	EUT Operating Mode(s)	
1.8	Configuration	
1.9	Remarks when standards applied	
1.10	Calibration Details of Equipment Used for Measurement	11
1.11	Test Facility	
1.12	Laboratory Accreditations and Listings	
2.0	Test Regulations	
2.1	Conducted Emissions at Mains Power Ports	
2.2	Conducted Emissions at Telecommunication Ports	
2.3	Radiated Electric Field Emissions(Below 1 GHz)	16
2.4	Radiated Electric Field Emissions(Above 1 GHz)	17
2.5	Harmonic Current Emissions	18
2.6	Voltage Fluctuations and Flicker	19
3.0	Criteria for compliance	20
3.1	Electrostatic Discharge	22
3.2	Radiated Electric Field Immunity	27
3.3	Electrical Fast Transients/Bursts	30
3.4	Surge Transients	32
3.5	Conducted Disturbance	35
3.6	Power Frequency Magnetic Field Immunity	37
3.7	Voltage Dips and Short Interruptions	39
	NDIX A – TEST DATA	
Cond	ucted Emissions at Mains Power Ports	41
Cond	ucted Emissions at Telecommunication Ports	43
Radia	ted Electric Field Emissions(Below 1 础)	45
	ted Electric Field Emissions(Above 1 대)	
	onic Current Emissions and Voltage Fluctuations and Flicker	
	Setup Photos and Configuration	
	ucted Voltage Emissions	
Cond	ucted Emissions at Telecommunication Ports	51
Radia	ted Electric Field Emissions(Below 1 础)	52
Radia	ted Electric Field Emissions(Above 1 屔)	53
	onic Current Emissions and Voltage Fluctuations and Flicker	
	ostatic Discharge	
	ted Electric Field Immunity	
	rical Fast Transients/Bursts	
	e Transients	
	ucted Disturbance	
	r Frequency Magnetic Field Immunity	
voita	ge Dips and Short Interruptions	JÕ

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Report No.: KES-E2-19T0014 Page (4) of (65)

E.U.T External Photographs	59
EUT Internal Photographs	60



Report No.: KES-E2-19T0014 Page (5) of (65)

1.0 General Product Description

Main Specifications of E.U.T are:

Item		Details		
	nem	TRM-410S TRM-810S/810M		
Display				
Network Camera	Inputs	Max. 4CH (4 PoE, RJ-45)	Max. 8CH (8 PoE) TRM-810S: Max. 8CH (8 PoE, RJ-45) TRM-810M: Max. 8CH (8 PoE, M12 D-Code)	
	Resolution	CIF ~ 8MP		
	Protocols	Wisenet(SUNAPI), ONVIF		
	Local Display	HDMI / VGA		
Live	Multi-Channel Display	[Local Monitor] 1 / 2H / 2V / 3V / 4 / Auto sequence [Web] 4 / Auto sequence	[Local Monitor] 1 / 2H / 2V / 3V / 4 / 6 / 8 / 9 / Auto sequence [Web] 1 / 4 / 9 / 1+5 / 1+7 / 2H / 2V / 3V / 6 / 12 / Auto sequence	
	Performance	[Local Monitor] 8MP(60fps), 5MP(90fps), 3MP(120fps), 2MP(120fps), 720p(120fps), D1(120fps)		
Performance	4			
Operating System	Embedded	Línux		
	Compression	H.265, H.264, MJPEG, WiseStream	i(H.265, H.264)	
	Recording Bandwidth	Max. 50Mbps	Max. 80Mbps	
	Resolution	CIF ~ 8MP		
Record	Туре	Normal, Schedule(Continuous/Event), Event (Pre/Post), Emergency		
	Retention	Retention per channel (1~400 days)		
	Event Trigger	Alarm Input (6). Video Loss, Camera Event(Sensor, MD, Video A Defocus Camera), G-Sensor(3 Axis)		
	Event Action	e-Mail, Alarm Out, Buzzer, Monitor Out		

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr

Horn		Details		
	ltem	TRM-410S	TRM-810S/810M	
	Playback Bandwidth	32Mbps(4ch simultaneously)	32Mbps(8ch simultaneously)	
	User	Max. 4 Users (Local 1, Remote 3)		
Search & Play	Mode	Date & Time(Calendar)/Event Log list, Smart Search(Virtual Li direction, Enter/Exit)		
	Simultaneous playback	Max. 4 channels(Local Monitor, CMS)	Max8 channels(Local Monitor CMS)	
-	Resolution	CIF ~ 8MP	C	
Search & Play	Fisheye Dewarping	Web / CMS		
	Playback Control	Fast/Slow Forward/Backward, Move one step up/down		
	Built-In	No HDD (supporting the installation of 2 HDDs per tray)		
Storage	Internal HDD	2 SATA(Front-Swap) - Max. 2TB(HDD, Non-RAID Mode) - Max. 4TB(SSD, Non-RAID Mode)		
	RAID	-	RAID-1	
	File backup	Exe(GUI), JPG/AVI(excluding GPS information)(Network)		
Backup	Function	Multi channel(Upto 4CH) Play, Date-Time/Title/GPS display	Multi channel(Upto 8CH) Play, Date-Time/Title/GPS display	
	Туре	Auto(Wi-Fi), Manual(HDD/SSD)		
	Wifi Backup Performance	MAX. 50Mbps MAX. 80Mbps		
Sensor	VO	6/4		
	Input	4 channels (network)	8 channels (network)	
Audio	Compression	G.711, G.726, AAC(16/48KHz)		
	Audio Communication	2-Way		

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr

Report No.:
KES-E2-19T0014
Page (7) of (65)

1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage	🗌 220 Vac	🗌 230 Vac	🛛 24 Vdc	🗌 12 Vdc 🗌 PoE
Frequency	50 Hz	🗌 60 Hz	Hz Hz	

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number Serial Num		Manufacturer	Remarks
NVR	TRM-810S	-	D-TECH CO.,LTD.	EUT
GPS Antenna	-	-	-	EUT
Control Box	-	-	-	EUT



Report No.: KES-E2-19T0014 Page (8) of (65)

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
Monitor 1	LS23C340	ZXPCHTMF A02346H	Samsung Electronics Co., Ltd.	-
Monitor 1 Adapter	A2514_DPN	CN07BN4400591B SK28F5NK904	11ssan Elecom(shen yang) Co., Ltd	-
Monitor 2	27UK850	805NTGYCH455	LG Electronics Inc.,	-
Monitor 2 Adapter	A16-140P1A	ZJ5CS64929301C3 04	LG Electronics Inc.,	-
Speaker	BR1000A Cuve Black 2	-	DONGGUAN EDIFIER TECHNOLOGY Co., Ltd	-
Alarm Zig 1	-	-	-	-
Alarm Zig 2	-	-	-	-
Network Camera 1	SNV-L6013	-	Hanwha Techwin(TIANJIN) Co., Ltd	-
Network Camera 2	SNV-L6013	-	Hanwha Techwin(TIANJIN) Co., Ltd	-
Mouse	1113	-	Microsoft	-
Notebook	LG15N54	410NZXE015458	LG Electronics Inc.,	-
Notebook Adapter	ADP-90WH B	84ZW19F1747	DELTA ELECTRONICS(JIANGS U) LTD.	-
Wireless Router	A2004plus	-	IpTIME	-
Wireless Router Adapter	TY-2007	-	Zioncoin Electronics (Shenzhen) Ltd.	-



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr



1.6 External I/O Cabling

Start		EN	ID	Cable Spec.	
Description	Description I/O Port		I/O Port	Length	Shield
	D-SUB	Monitor 1	D-SUB	1.3	U
	HDMI	Monitor 1	HDMI	1.4	U
	RJ-45 (RS-232)	Control Box	RJ-45	3.1	U
	RJ-45 (Alarm In)	Alarm Zig 1	4 Pin	3.0	U
	RJ-45 (Alarm Out)	Alarm Zig 2	4 Pin	3.2	U
NVR (EUT)	RJ-45 (PoE)	Network Camera 1	RJ-45 (PoE)	3.0	U
	RJ-45 (PoE)	Network Camera 2	RJ-45 (PoE)	3.2	U
	USB	Mouse	USB	1.8	U
	3.5 mm (Audio)	Speaker	3.5 mm	1.4	U
	4 Pin	GPS Antenna	4 Pin	4.0	U
	RJ-45 (Viewer)	Notebook	RJ-45	5.0	U
	Wireless	Wireless Router	Wireless	-	-
Wireless Router	Wireless	Notebook	Wireless	-	-

* Unshielded = U, Shielded = S

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr




Report No.: KES-E2-19T0014 Page (10) of (65)

1.7 EUT Operating Mode(s)

Test mode	operating
OP	Confirmed the operation of the camera through WebViewer and network Ping Test.

E.U.T Test operating S/W				
Name Version Manufacture Company				
Web Viewer	-	Hanwha Techwin Co., Ltd.		

1.8 Configuration

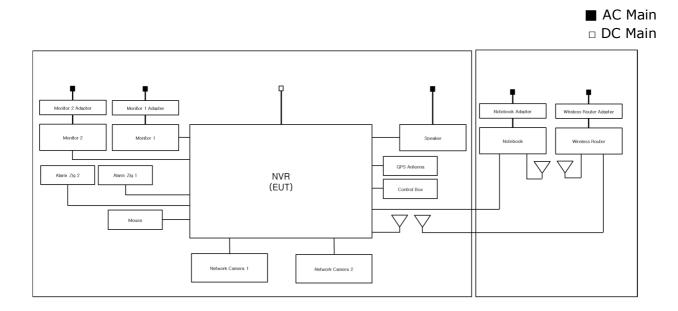

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



Report No.: KES-E2-19T0014 Page (11) of (65)

1.9 Remarks when standards applied N/A

1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeoju-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4:2014 and CISPR 16-1-4:2012

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	KOREARRAEMI (3 m & 10 m Semi-Aechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)		KR0100
InternationalKOLASand conducted EMS (ESD, RS, EFT/Burs Magnetic, Dips andUSAFCC3 m & 10 m Semi-Aechoic Open Area and Conducted perform FCC Part 15/18 mCanadaISED3 m & 10 m Semi-Aechoic Conducted testJAPANVCCIMains Ports Conducted Measurement, Telecomm Conducted Disturbance Me Radiation 10 meter site		EMI (3 m & 10 m Semi-Aechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	ALLOGRATORY ACCREDITATION OF THE STING NO. KTASP
		3 m & 10 m Semi-Aechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	FCC KR0100
		3 m & 10 m Semi-Aechoic Chamber and Conducted test site	23298-1
		Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	R-4308, C-4798, T-2311, G-914
Europe	TÜV SÜD	 EMI (3 m & 10 m Semi-Aechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions) 	CARAT 17 07 01633 001

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr

Report No.:
KES-E2-19T0014
Page (12) of (65)

2.0 Test Regulations

The emissions tests were performed according to following regulations:

EMC – Directive 2014/30/EU		
EN 61000-6-3:2011		
EN 61000-6-1:2007		
EN 61000-6-4:2007 +A1:2011		
EN 61000-6-2:2005		
EN 55011:2007 +A1:2010	Group 1	Group 2
EN 55014-1:2006 +A2:2011		
EN 55014-2:1997 +A2:2008		
EN 55015:2013		
EN 55022:2010	Class A	Class B
EN 55024:2010		
EN 50130-4:2011 +A1:2014		
EN 61326-1:2013		

KESK	KES Co., Ltd 3701, 40, Simin-daero 365b Dongan-gu, Anyang-si, Gyeonggi-d Tel: +82-31-425-6200 / Fax: +82- www.kes.co.kr	eon-gil, o, 14057, Korea	Report No.: KES-E2-19T0014 Page (13) of (65)
🗌 VCCI V-3 / 20	015.04	Class A	Class B
☐ AS/NZS CISP	R22:2009 +A1:2010	Class A	Class B
47 CFR Part 1	5, Subpart B		
CISPR 22:2	2009 +A1:2010	Class A	Class B
ANSI C63.4	1-2009		
IC Regulation	ICES-003 : 2017		
	CISPR 22-10	Class A	Class B
ANSI C63.4	4-2014		
🛛 RE – Directive	e 2014/53/EU		
🛛 EN 301 489-1 V	V2,1,1		
🗌 Equipm	nent for fixed use nent for vehicular use nent for portable use	🛛 Class A	Class B
EN 301 489-3	V1,6,1		
EN 301 489-9	V1,4,1		
🛛 EN 301 489-17	V3,1,1		
EN 60945:2002	2		
🛛 EN 61000-3-2:	2014		
🛛 EN 61000-3-3:	2013		



Report No.: KES-E2-19T0014 Page (14) of (65)

2.1 Conducted Emissions at Mains Power Ports

Test Date

Jan. 20, 2019

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
\boxtimes	EMI Test S/W	EMC32	R & S	9.12.00	-
\boxtimes	EMI TEST RECEIVER	ESR3	R & S	101781	04, 25, 2019
\boxtimes	LISN	ENV216	R & S	101787	01, 04, 2020
\square	LISN	ESH2-Z5	R & S	100450	04, 25, 2019
	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 26, 2019

Test Conditions

Temperature:	24.2 ℃
Relative Humidity:	55.3 % R.H.

Frequency Range of Measurement


150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:



Remarks

See Appendix A for test data.



Report No.: KES-E2-19T0014 Page (15) of (65)

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Jan. 20, 2019

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
\square	EMI Test S/W	EMC32	R & S	9.12.00	-
\square	EMI TEST RECEIVER	ESR3	R & S	101781	04, 25, 2019
\square	LISN	ENV216	R & S	101787	01, 04, 2020
\square	LISN	ESH2-Z5	R & S	100450	04, 25, 2019
\square	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 26, 2019
\square	8-WIRE ISN CAT3,5	ENY81	R & S	100174	01, 07, 2020
\boxtimes	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	01, 07, 2020
	ISN	ISN S8	SCHWARZBECK	ISN-S8-0019	05, 09, 2019
	CDN	CDNS502A	TESEQ	40431	01, 08, 2020

Test Conditions

Temperature:	24.2 ℃
Relative Humidity:	55.3 % R.H.


Frequency Range of Measurement

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:



Remarks

<u>N/A</u>

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



Report No .: KES-E2-19T0014 Page (16) of (65)

Radiated Electric Field Emissions(Below 1 GHz) 2.3

Test Date

Jan. 21, 2019

Test Location

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
\square	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
\square	EMI TEST RECEIVER	ESU26	R & S	100551	04, 11, 2019
\square	AMPLIFIER	SCU 01	R & S	100603	11, 26, 2019
\boxtimes	TRILOG- BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	11, 29, 2020
\square	ATTENUATOR	8491A	HP	32173	03, 21, 2019

Test Conditions

Temperature:	24.1 ℃
Relative Humidity:	51,8 % R.H.

Frequency Range of Measurement


30 MHz to 1 GHz


Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:





Remarks

See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



Report No.: KES-E2-19T0014 Page (17) of (65)

2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Jan. 24, 2019

Test Location

Semi Anechoic Chamber #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
	EMI TEST RECEIVER	ESR7	R & S	101190	08, 06, 2019
\square	PREAMPLIFIER	8449B	AGILENT	3008A01967	05, 31, 2019
\square	ATTENUATOR	8491A	HP	35496	03, 21, 2019
	DOUBLE RIDGED HORN ANTENNA		A.H.SYSTEM,INC	781	05, 02, 2019

Test Conditions

Temperature:	24.3 °C
Relative Humidity:	51.0 % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 ₩z

Test Results

The requirements are: PASS NOT PASS NOT APPLICABLE

Remarks

See Appendix A for test data.



2.5 Harmonic Current Emissions

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
	EMI Test S/W	dpa.control	EM TEST	5.4.11.0	-
	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	08, 08, 2019
	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature:℃Relative Humidity:% R.H.

Classification of Equipment for Harmonic Current Emissions

☐ Class A
 ☐ Class B
 ☐ Class C(Below 25 W)
 ☐ Class C(Above 25 W)
 ☐ Class D

Test Results

The requirements are:

□ PASS
 □ NOT PASS
 □ NOT APPLICABLE

Remarks

It is not tested apply because it is powered by DC.



Report No.: KES-E2-19T0014 Page (19) of (65)

2.6 Voltage Fluctuations and Flicker

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
	EMI Test S/W	dpa.control	EM TEST	5.4.11.0	-
	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	08, 08, 2019
	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: Relative Humidity: ℃ % R.H.

Test Results

The requirements are:

	PASS
	NOT PASS
\boxtimes	NOT APPLICABLE

Remarks

It is not tested apply because it is powered by DC.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



3.0 Criteria for compliance

The performance criteria are:

- •. performance criteria A for immunity tests with phenomena of a continuous nature;
- •. performance criteria B for immunity tests with phenomena of a transient nature;
- •. performance criteria for immunity tests with power interruptions exceeding a certain time.

The equipment shall meet the performance criteria as specified in the following clauses.

Performance table

Criteria	During test	After test				
А	Shall operate as intended. May show degradation of performance (see note 1). Shall be no loss of function. Shall be no unintentional transmissions.	Shall operate as intended. Shall be no degradation of performance (see note 2). Shall be no loss of function. Shall be no loss of stored data or user programmable functions.				
В	May show loss of function (one or more). May show degradation of performance (see note 1). No unintentional transmissions.	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no degradation of performance (see note 2). Shall be no loss of stored data or user programmable functions.				
С	May be loss of function (one or more).	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no degradation of performance (see note 2).				
NOTE 1:	Degradation of performance during the test is understood as a degradation to a level not below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance					
NOTE 2:	No degradation of performance after the test is understood as no degradation below a minimum performance level specified by the manufacturer for the use of the apparatus as intended. In some cases the specified minimum performance level may be replaced by a permissible degradation of performance. After the test no change of actual operating data or user retrievable data is allowed. If the minimum performance level or the permissible performance degradation is not specified by the manufacturer then either of these may be derived from the product description and documentation (including leaflets and advertising) and what the user may reasonably expect from the apparatus if used as intended.					

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr



Performance criteria for Continuous phenomena applied to Transmitters (CT) The performance criteria A shall apply.

The EUT shall not unintentional transmission during the test.

Confirmed the operation of the camera through WebViewer and network Ping Test.

Performance criteria for Transient phenomena applied to Transmitters (TT) The EUT shall not unintentional transmission after the test.

Confirmed the operation of the camera through WebViewer and network Ping Test.

The performance criteria B shall apply, except for voltage dips of 100 ms and voltage interruptions of 5 000 ms duration, for which performance criteria C shall apply. However, internal battery benchmark since it is applied B

Performance criteria for Continuous phenomena applied to Receivers (CR) The performance criteria A shall apply.

The EUT shall not unintentional transmission during the test.

Confirmed the operation of the camera through WebViewer and network Ping Test.

Performance criteria for Transient phenomena applied to Receivers (TR)

The EUT shall not unintentional transmission after the test.

Confirmed the operation of the camera through WebViewer and network Ping Test.

The performance criteria B shall apply, except for voltage dips of 100 ms and voltage interruptions of 5 000 ms duration for which performance criteria C shall apply. However, internal battery benchmark since it is applied B



Report No.: KES-E2-19T0014 Page (22) of (65)

3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

Jan. 19, 2019

Test Location

EMS-ESD: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
\square	ESD SIMULATOR	ESS-2000	Noise Ken	ESS01Z0454	10, 11, 2019
\square	НСР	-	Noise Ken	-	-
\square	VCP	-	Noise Ken	_	-

Test Conditions

Temperature:	23.2 ℃
Relative Humidity:	51.6 % R.H.
Atmospheric Pressure:	101.2 kPa




3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Report No.: KES-E2-19T0014 Page (23) of (65)

Test Specifications

Discharge Factor:	\geq 1 s			
Discharge Impedance:	330 ohm / 150 pF			
Kind of Discharge:	Air, Contact (di	rect and indirec	t)	
Polarity:	Positive and Ne	egative		
Number of Discharge:	more than 10 t	ime		
Discharge Voltage:	Contact 2 kV 4 kV 6 kV 8 kV 15 kV	Air	HCP 2 kV 4 kV 6 kV 8 kV 15 kV	VCP 2 kV 4 kV 6 kV 8 kV 15 kV
Notes: HCP: Horizonta VCP: Vertical co				

Required Performance Criteria:


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr

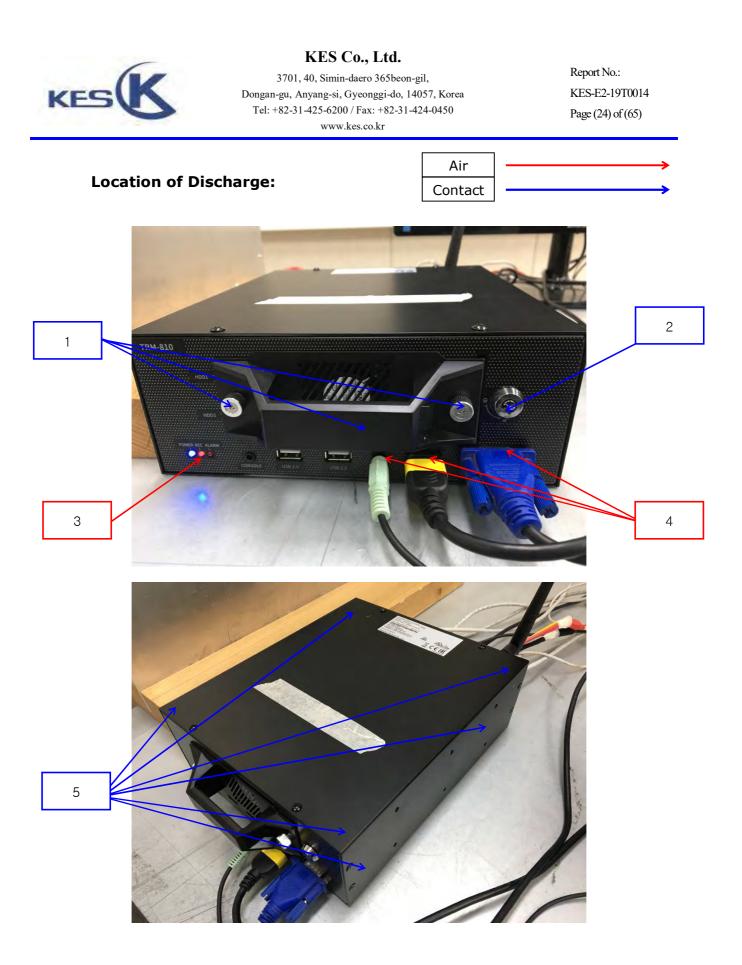

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Report No.: KES-E2-19T0014 Page (25) of (65)

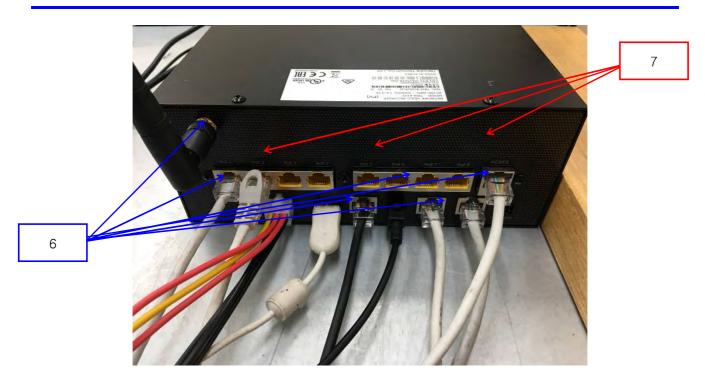

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



Report No.: KES-E2-19T0014 Page (26) of (65)

Test Data

Indirect Discharge

No	Test Point	Discharge Method	Perfor	Remarks	
No.	Test Point	Discharge Method	Criteria	Results	Remarks
1	HCP Contact	Contact Discharge	В	А	-
2	VCP Contact	Contact Discharge	В	А	-

Direct Discharge

No	Test Daint	Discharge Method	Performance		Remarks
No.	Test Point	t Discharge Method		Results	Remarks
1	HDD Case	Contact Discharge	В	А	-
2	Key Slot	Contact Discharge	В	А	-
3	LED	Air Discharge	В	А	-
4	Front Ports	Air Discharge	В	А	-
5	Enclosure	Contact Discharge	В	А	-
6	Rear Ports	Contact Discharge	В	A	-
7	Rear Enclosure	Air Discharge	В	A	-

Direct Discharge

Note: "Blank" = Not performed

Results:

- A No degradation of function
- B Distortion/Error of function (self-recoverable)
- C Loss of function

Test Results

PASS Required Performance Criteria

- □ NOT PASS Required Performance Criteria
- □ NOT APPLICABLE

Remarks

<u>N/A</u>



Report No.: KES-E2-19T0014 Page (27) of (65)

3.2 Radiated Electric Field Immunity

Reference Standard

EN 61000-4-3:2006 +A2:2010

Test Date

Jan. 24, 2019

Test Location

EMS-RS: 🗌 Semi Anechoic Chamber #2

Semi Anechoic Chamber #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
\square	EMS Test S/W	EMC32	R & S	10.10.02	-
\square	SIGNAL GENERATOR	SMB 100A	R & S	177586	08, 06, 2019
\boxtimes	BROADBAND AMPLIFIER	BBA100	R & S	101239	08, 06, 2019
\boxtimes	BROADBAND AMPLIFIER	100S1G6M1	AR	579931	08, 06, 2019
\square	POWER METER	NRP2	R & S	103475	08, 06, 2019
\square	AVG POWER SENSOR	NRP-Z91	R & S	102526	08, 06, 2019
\boxtimes	AVG POWER SENSOR	NRP-Z91	R & S	102527	08, 06, 2019
\boxtimes	STACKED DOUBLE LOG- PER- ANTENNA	STPL9128 E	Schwarzbeck	9128ES-121	-
\square	DIRECTIONAL COUPLER	KYDC-D1070- DX40	KY TELECOM	KY150001	08, 06, 2019
\boxtimes	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05, 02, 2019

Test Conditions

Temperature:	24.3 °
Relative Humidity:	51.0 9
Atmospheric Pressure:	101.7

24.3 ℃ 51.0 % R.H. 101.7 ^{kPa}

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr

Test Specifications

Antenna Polarization:	Horizontal & ve	ertical unless ind	dicated otherwise
Antenna Distance:	🛛 3 m		
Field Strength:	□ 1 V/m □ 10 V/m		🛛 3 V/m
Frequency Range:	⊠ 80 Mt to 6 ■ 80 Mt to 2,		☐ 1,4 GHz to 2,7 GHz
Modulation:		1 ^{kHz} sine wave),5 s ON : 0,5 s	OFF)
Frequency step:	🛛 1 % step		
Dwell Time:	🛛 1 s	🗌 3 s	
# of Sides Radiated:	⊠ 4		
Required Performance Criteria:		\bowtie A	



Test Data

Side Expected	Performance	Re	sults
Side Exposed	Criteria	Horizontal	Vertical
Front	А	А	А
Right	А	А	А
Back	А	А	А
Left	А	А	А

Note: "Blank" = Not performe	Note:	"Blank" =	Not	performed
------------------------------	-------	-----------	-----	-----------

Results:

- A No degradation of function
- B Distortion/Error of function (self-recoverable)
- C Loss of function

Test Results

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria
- □ NOT APPLICABLE

Remarks

<u>N/A</u>

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



www.kes.co.kr

Report No.: KES-E2-19T0014 Page (30) of (65)

3.3 Electrical Fast Transients/Bursts

Reference Standard

EN 61000-4-4:2012

Test Date

Jan. 23, 2019

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
\boxtimes	EMS Test S/W	iec.control	EM TEST	5.4.7	-
	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 27, 2019
	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 27, 2019
	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	P1633183115	11, 26, 2019

Test Conditions

Temperature: Relative Humidity: Atmospheric Pressure:	24.3 ℃ 53.9 % R.H. 100.4 ^{kPa}	
Test Specifications Pulse Amplitude & Polarity: (Power Lines)	$ \begin{array}{ c c c c c } \hline & \pm & \textbf{0.5} & \text{kV} \\ \hline & \pm & \textbf{2.0} & \text{kV} \end{array} $	$ \begin{array}{ c c c c c c } \hline & \pm 1.0 & \text{kV} \\ \hline & \pm 4.0 & \text{kV} \end{array} $
Pulse Amplitude & Polarity: (Signal Lines)	$ \begin{array}{ c c c c } \hline & \pm \ \textbf{0.5} & \text{kV} \\ \hline & \pm \ \textbf{2.0} & \text{kV} \end{array} $	$\Box \pm 1.0$ kV
Burst Period:	⊠ 300 ms	🗌 2 s
Repetition Rate:	S kHz	□ 100 kHz
Duration of Test Voltage:	$\boxtimes \ge 1 \min$	
Required Performance Criteria:	: 🛛 В	



Test Data

□ Input a.c. power ports – Coupling/Decoupling Network used

Made of Application	Performance	Results	
Mode of Application	de of Application Criteria		(-) Burst (kV)
-	В	-	-

Input d.c. power ports – Coupling/Decoupling Network used

Made of Application	Performance	Resi	ults
Mode of Application	Criteria	(+) Burst (kV)	(-) Burst (kV)
L1	В	А	А
L2	В	А	А
L1 – L2	В	A	A

Signal ports and telecommunication ports – Coupling Clamp used

Mada of Application	Performance	Results		
Mode of Application	Criteria	(+) Burst (kV)	(-) Burst (kV)	
RJ-45 (Control Box)	В	А	А	
RJ-45 (Alarm In)	В	А	А	
RJ-45 (Alarm Out)	В	А	А	
RJ-45 (PoE)	В	А	А	
4 Pin (GPS)	В	А	А	
RJ-45 (Viewer)	В	А	А	

Note: "Blank" = Not performed

Results:

- A No degradation of function
- B Distortion/Error of function (self-recoverable)
- C Loss of function

Test Results

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria
- NOT APPLICABLE

Remarks

<u>N/A</u>



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Report No.: KES-E2-19T0014 Page (32) of (65)

3.4 Surge Transients

Reference Standard

EN 61000-4-5:2014

Test Date

N/A

Test Location

EMS-Surge: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
	EMS Test S/W	iec.control	AMETEK CTS	7.1.2	-
	ULTRA COMPACT SIMULATOR	UCS 500 N5	EM TEST	V0936105120	06, 26, 2019
	MOTOR VARIAC	MV2616	EM TEST	V0936105123	06, 26, 2019
	CDN	CNV 508N1	EM TEST	P1551168979	04, 25, 2019
	CDN	CNV 508T5	EM TEST	P1549168422	04, 25, 2019

Test Conditions

Temperature:
Relative Humidity:
Atmospheric Pressure:

°C % R.H. ^{kPa}



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr

Report No.:
KES-E2-19T0014
Page (33) of (65)

Test Specifications

Power Lines	
Source Impedance:	12 ohm for common mode and 2 ohm for differential mode
Surge Amplitude:	Common Mode □ (0,5 / 1,0 / 2,0) kV Differential Mode □ (0,5 / 1,0) kV
Number of Surges:	5 surges per angle
Angle:	0°, 90°, 180°, 270° (input a.c. power port)
Polarity:	Positive & Negative
Repetition Rate:	\Box 1 surge per min \Box 1 surge per 30 sec.
Required Performance Criteria:	В
Signal Lines Source Impedance: Surge Amplitude:	42 ohm for common mode <u>Common Mode</u> (0,5 / 1,0) ^{kV}
Number of Surges:	□ 5 Surges
Polarity:	Positive & Negative
Repetition Rate:	\Box 1 surge per min \Box 1 surge per 30 sec.
Required Performance Criteria:	В



Report No.:
KES-E2-19T0014
Page (34) of (65)

Test Data

Mode of Application	Performance	Resi	ults
	Criteria	(+) Surge (kV)	(-) Surge (kV)
-	В	-	-

Line to Earth – Common Mode

Mada of Application	Performance	Resi	ults
Mode of Application	Criteria	(+) Surge (kV)	(-) Surge (kV)
-	В	-	-
-	В	-	-

Signal Lines

	Line	to	Earth	_	Common	Mode
--	------	----	-------	---	--------	------

Mode of Application	Performance	Resi	ults
	Criteria	(+) Surge (kV)	(-) Surge (kV)
-	В	-	-

Results:

- A No degradation of function
- B Distortion/Error of function (self-recoverable)
- C Loss of function

Test Results

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria
- NOT APPLICABLE

Remarks

It is not tested apply because it is powered by DC.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



Report No.: KES-E2-19T0014 Page (35) of (65)

3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014

Test Date

Jan. 22, 2019

Test Location

EMS-CS: Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
\square	EMS Test S/W	icd.control	EM TEST	5.3.11	-
\boxtimes	CONTINUOUS WAVE SIMULATOR	CWS 500N1.4	EM TEST	P1602169880	11, 26, 2019
\square	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	11, 26, 2019
\square	CDN	CDN M016	TESEQ	43694	11, 26, 2019
\square	CDN	CDN T800	TESEQ	42800	11, 26, 2019
\square	EM CLAMP	KEMZ 801A	TESEQ	44099	11, 27, 2019

Test Conditions

Temperature: Relative Humidity: Atmospheric Pressure:	23.9 °C 54.6 % R.H. 100.8 ^{kPa}		
Test Specifications Frequency range:	\boxtimes 150 kHz to 80 MHz \square 150 kHz to 230 MHz		☐ 10 kHz to 30 MHz ☐ 10 kHz to 100 MHz
Voltage Level:	☐ 1 Vrms ☐ 10 Vrms		🛛 3 Vrms
Modulation:	⊠ AM, 80 %, 1 [⊮] sir □ PM, 1 ^H (0,5 s ON		OFF)
Frequency step:	🛛 1 % step		
Dwell Time:	🖂 1 s	🗌 3 s	
Required Performance Criteria:	: 🖂 A		

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



Report No.:
KES-E2-19T0014
Page (36) of (65)

Test Data

	Input	a.c.	power	ports
--	-------	------	-------	-------

Coupling Location (Line Stressed)	Coupling Method	Performance Criteria	Results
-	-	-	-

Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Performance Criteria	Results
L1 – L2	CDN	А	A

Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Performance Criteria	Results
RJ-45 (Control Box)	Clamp	А	А
RJ-45 (Alarm In)	Clamp	А	А
RJ-45 (Alarm Out)	Clamp	A	А
RJ-45 (PoE)	CDN	А	А
4 Pin (GPS)	Clamp	A	А
RJ-45 (Viewer)	CDN	A	A

Notes: CDN = Coupling Decoupling Network EMC = Electro Magnetic Clamp "blank" = Not performed

Results:

- A No degradation of function
- B Distortion/Error of function (self-recoverable)
- C Loss of function

Test Results

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria
- NOT APPLICABLE

Remarks

<u>N/A</u>



Report No.: KES-E2-19T0014 Page (37) of (65)

3.6 Power Frequency Magnetic Field Immunity

Reference Standard

EN 61000-4-8:2010

Test Date

N/A

Test Location

EMS-Magnetic: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
	EMS Test S/W	iec.control	EM TEST	5.4.7	-
	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 27, 2019
	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 27, 2019
	MAGNETIC FIELD COIL	MS 100N	EM TEST	P1536163691	11, 26, 2019
	CURRENT TRANSFORMER	MC 2630	EM TEST	P1629182219	11, 26, 2019

Test Conditions

Temperature:	°C	
Relative Humidity: Atmospheric Pressure:	% R.H. ^{kPa}	
Test Specifications Field Strength:	□ 1 A/m □ 30 A/m	🗌 3 A/m
Frequency:	50 Hz	🗌 60 Hz
Required Performance Criteria:	Δ Α	



Test Data

		Immersion	method
--	--	-----------	--------

Coil orientation	Observation
X - axis	-
Y - axis	-
Z - axis	-

Proximity method

Coil orientation	Observation
-	-
-	-
-	-

Note: "blank" = Not performed

Results:

- A No degradation of function
- B Distortion/Error of function (self-recoverable)
- C Loss of function

Test Results

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria
- NOT APPLICABLE

Remarks

N/A : Not affected by magnetic fields.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



Report No.: KES-E2-19T0014 Page (39) of (65)

3.7 Voltage Dips and Short Interruptions

Reference Standard

EN 61000-4-11:2004

Test Date

N/A

Test Location

EMS-Voltage dip: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
	EMS Test S/W	iec.control	EM TEST	5.4.7	-
	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 27, 2019
	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 27, 2019

Test Conditions

Temperature:	°C
Relative Humidity:	% R.H.
Atmospheric Pressure:	kPa

Test Specifications

Number of Tests :	3 times
Test Intervals :	10 sec
Performance Criteria :	B for Voltage Dips (100 %, 0.5 T) B for Voltage Dips (100 %, 1 T) B for Voltage Dips (30%, 25 T) C for Voltage Interruptions (100 %, 250 T)



Report No.: KES-E2-19T0014 Page (40) of (65)

Test Data

Voltage Dips

NO	Donth	Duration	Perfoi	Domorika	
NO	Depth	Duration	Criteria	Results	Remarks
1	100 %	0.5 T	-	-	-
2	100 %	1 T	-	-	-
3	30 %	25 T	-	-	-

Short Interruptions

NO Depth		Duration	Perfor	Domarka	
NO	Depth	Duration	Criteria	Results	Remarks
1	100 %	250 T	-	-	-

Results:

- A No response observed from E.U.T
- B Unit shuts down then automatically restarts when full voltage is restored.
- C Unit shuts down then manually restarts when full voltage is restored or Loss of function.

Test Results

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria
- NOT APPLICABLE

Remarks

It is not tested apply because it is powered by DC.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr


APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

Common Information

Test Description: Model No.: Mode Operator Name: Conducted Emission TRM-810S (+) KES

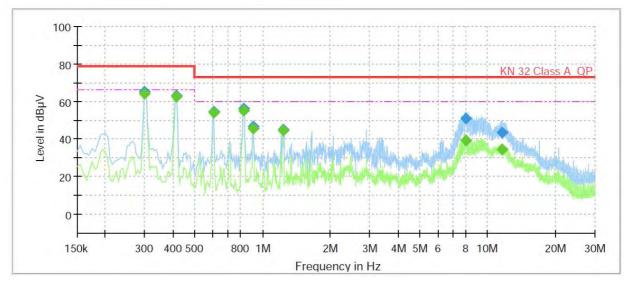

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.300000	65.15		79.00	13.85	1000.0	9.000	L1	19.6
0.300000		64.21	66.00	1.79	1000.0	9.000	L1	19.6
0.415000	63.23		79.00	15.77	1000.0	9.000	L1	19.7
0.415000		62.67	66.00	3.33	1000.0	9.000	L1	19.7
0.605000	54.31		73.00	18.69	1000.0	9.000	L1	19.9
0.605000		53.80	60.00	6.20	1000.0	9.000	L1	19.9
0.825000	56.08		73.00	16.92	1000.0	9.000	L1	20.0
0.825000		55.21	60.00	4.79	1000.0	9.000	L1	20.0
0.905000		45.77	60.00	14.23	1000.0	9.000	L1	20.1
0.905000	46.80		73.00	26.20	1000.0	9.000	L1	20.1
1.240000	44.99		73.00	28.01	1000.0	9.000	L1	20.2
1.240000		44.73	60.00	15.27	1000.0	9.000	L1	20.2
8.030000		39.39	60.00	20.61	1000.0	9.000	L1	19.8
8.030000	50.79		73.00	22.21	1000.0	9.000	L1	19.8
11.595000		34.33	60.00	25.67	1000.0	9.000	L1	20.1
11.595000	43.29		73.00	29.71	1000.0	9,000	L1	20.1

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr




3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Report No.: KES-E2-19T0014 Page (42) of (65)

[NEUTRAL]

Common Information

Test Description: Model No.: Mode Operator Name: Conducted Emission TRM-810S (-) KES

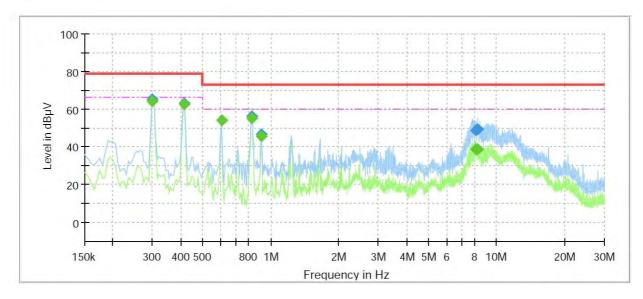

Final_Result

Frequency	QuasiPeak	CAverage	Limit	Margin	Meas.	Bandwidth	Line	Corr.
(MHz)	(dBµV)	(dBµV)	(dBµV)	(dB)	Time (ms)	(kHz)		(dB)
0.300000	64.92		79.00	14.08	1000.0	9.000	N	19.6
0.300000		63.98	66.00	2.02	1000.0	9.000	N	19.6
0.415000	63.21		79.00	15.79	1000.0	9.000	N	19.7
0.415000	-	62.59	66.00	3.41	1000.0	9.000	N	19.7
0.605000	54.25		73.00	18.75	1000.0	9.000	N	19.9
0.605000		53.73	60.00	6.27	1000.0	9.000	N	19.9
0.825000	55.97		73.00	17.03	1000.0	9.000	N	20.0
0.825000		55.22	60.00	4.78	1000.0	9.000	N	20.0
0.905000		45.56	60.00	14.44	1000.0	9.000	N	20.1
0.905000	46.71		73.00	26.29	1000.0	9.000	N	20.1
8.120000		38.42	60.00	21.58	1000.0	9.000	N	19.8
8.120000	48.79		73.00	24.21	1000.0	9.000	N	19.8
8.235000		38.39	60.00	21.61	1000.0	9.000	N	19.8
8.235000	49.49		73.00	23.51	1000.0	9.000	N	19.8

Calculation

QuasiPeak[dB uV] / CAverage [dB uV] = Reading Value[dB uV] + Corr. [dB] QuasiPeak / CAverage : The Final Value Reading Value : Not shown in the table. Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Report No.: KES-E2-19T0014 Page (43) of (65)


Conducted Emissions at Telecommunication Ports

LAN MODE

[1 000 Mbps]

Common Information

Test Description: Model No.: Mode Operator Name: Telecommunication Emission TRM-810S LAN / 1 000 Mbps KES

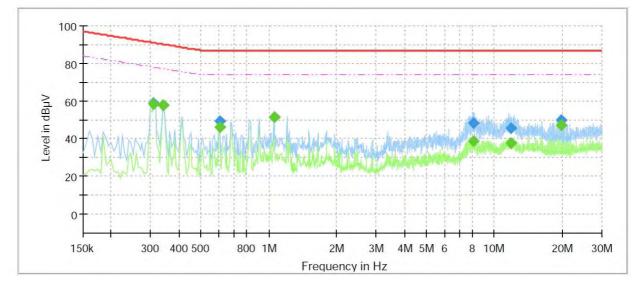

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.310000	58.80		90.97	32.17	1000.0	9.000	Single Line	19.8
0.310000		58.10	77.97	19.87	1000.0	9.000	Single Line	19.8
0.340000		57.66	77.20	19.54	1000.0	9.000	Single Line	19.8
0.340000	57.85		90.20	32.35	1000.0	9.000	Single Line	19.8
0.605000	49.21		87.00	37.79	1000.0	9.000	Single Line	19.8
0.605000		45.88	74.00	28.12	1000.0	9.000	Single Line	19.8
1.055000		51.20	74.00	22.80	1000.0	9.000	Single Line	20.0
1.055000	51.57		87.00	35.43	1000.0	9.000	Single Line	20.0
8.045000	48.16		87.00	38.84	1000.0	9.000	Single Line	19.5
8.045000		38.41	74.00	35.59	1000.0	9.000	Single Line	19.5
11.915000	45.66	1	87.00	41.34	1000.0	9.000	Single Line	19.8
11.915000		37.56	74.00	36.44	1000.0	9.000	Single Line	19.8
19.710000		47.31	74.00	26.69	1000.0	9.000	Single Line	20.0
19.710000	49.79		87.00	37.21	1000.0	9.000	Single Line	20.0

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr




3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Report No.: KES-E2-19T0014 Page (44) of (65)

Poe Mode

[100 Mbps]

Common Information

Test Description: Model No.: Mode Operator Name: Telecommunication Emission TRM-810S PoE / 100 Mbps KES

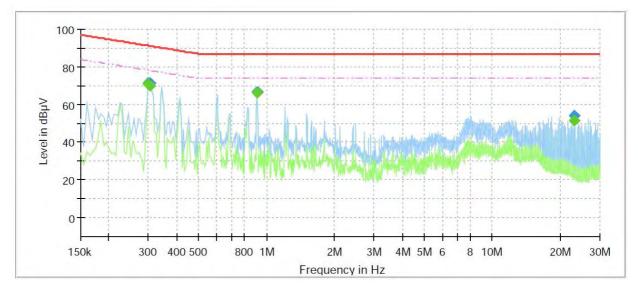

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.300000		71.11	78.24	7.13	1000.0	9.000	Single Line	19.8
0.300000	71.41		91.24	19.83	1000.0	9.000	Single Line	19.8
0.305000		70.01	78.11	8.10	1000.0	9.000	Single Line	19.8
0.305000	71.23		91.11	19.88	1000.0	9.000	Single Line	19.8
0.905000		66.33	74.00	7.67	1000.0	9.000	Single Line	20.0
0.905000	66.48		87.00	20.52	1000.0	9.000	Single Line	20.0
23.130000		51.12	74.00	22.88	1000.0	9.000	Single Line	20.2
23.130000	54.00		87.00	33.00	1000.0	9.000	Single Line	20.2

Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB] QuasiPeak / CAverage : The Final Value Reading Value : Not shown in the table. Corr. : Correction values (ISN FACTOR+ Cable Loss)

* LAN Mode Communication maximum speed : 1 000 Mbps PoE Mode Communication maximum Speed : 100 Mbps

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr

Report No .: KES-E2-19T0014 Page (45) of (65)

Radiated Electric Field Emissions(Below 1 础)

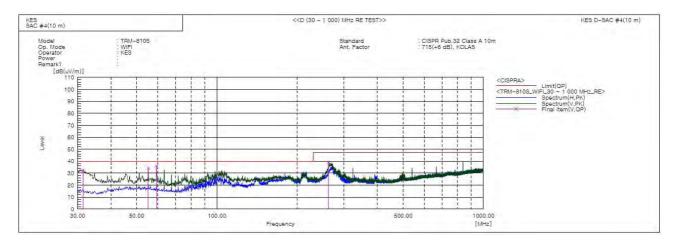

Final Result

No.	Frequency	(P)	Reading QP	c.f	Result QP	Limit QP	Margin QP	Height	Angle	Remark
1.0	[MHz]	1	[dB(uV)]	[dB(1/m)]	[dB(uV/m)]	[dB(uV/m)]	[dB]	[cm]	[deg]	
1	31.474	V	57.5	-25.3	32.2	40.0	7.8	119.0	47.0	
2	55.241	V	56.3	-22.0	34.3	40.0	5.7	102.0	158.0	
3	59.343	V	58.6	-22.6	36.0	40.0	4.0	130.0	134.0	
4	262.440	V	58.4	-20.0	38.4	47.0	8.6	165.0	358.0	

Calculation – SAC #4(10 m)

 $\text{Result}(\text{QP}) \left[dB(\mu/m) \right] = (\text{Reading}(\text{QP})[dB(\mu/m)] + c.f[dB(1/m)]$


 $\begin{aligned} & \mathsf{Margin}(\mathsf{QP})[\mathsf{dB}] = \mathsf{Limit}[\mathsf{dB}(\mathscr{W}/\mathsf{m})] - \mathsf{Result}(\mathsf{QP}) \ [\mathsf{dB}(\mathscr{W}/\mathsf{m})] \\ & \mathsf{Reading}(\mathsf{QP}) : \mathsf{Reading value}, \ \mathsf{Result}(\mathsf{QP}) : \mathsf{Reading value} + \mathsf{Factor value} \end{aligned}$

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Marjin value



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Report No.: KES-E2-19T0014 Page (46) of (65)

Radiated Electric Field Emissions(Above 1 础)

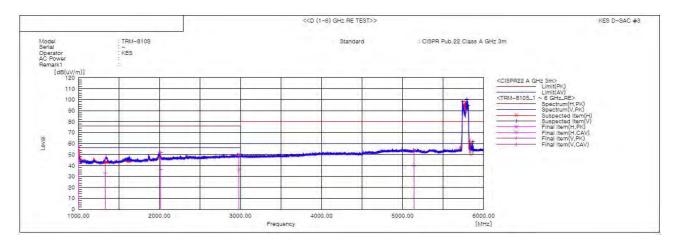

Final Result

No.	Frequency	(P)	Reading PK	Reading CAV	c.f	Result PK	Result CAV	Limit PK	Limit AV	Margin PK	Margin CAV	Height	Angle	Remark
	[MHz]		[dB(uV)]	[dB(uV)]	[dB(1/m)]	[dB(uV/m)]	[dB(uV/m)]	[dB(uV/m)]	[dB(uV/m)]	[dB]	[dB]	[cm]	[deg]	
1	1004.123	H	59.2	45.8	-1.9	57.3	43.9	76.0	56.0	18.7	12.1	100.0	135.6	
2	1330.292	V	46.8	33.9	-0.6	46.2	33.3	76.0	56.0	29.8	22.7	100.0	198.7	
3	2015.707	V	48.1	32.3	4.0	52.1	36.3	76.0	56.0	23.9	19.7	100.0	227.7	
4	2982.023	H	42.7	28.8	7.5	50.2	36.3	76.0	56.0	25.8	19.7	100.0	329.0	
5	5141.808	V	39.1	25.3	14.4	53.5	39.7	80.0	60.0	26.5	20.3	100.0	257.3	
6	5740.000	V		-	14.8			80.0	60.0			100.0	68.6	
7	5777.000	H			15.0			80.0	60.0			100.0	345.8	
8	5794.000	V			15.0			80.0	60.0			100.0	79.5	
9	5812.000	V			15.1			80.0	60.0			100.0	79.5	
10	5826.000	H			15.1			80.0	60.0			100.0	2.0	
11	5843.000	H			15.2			80.0	60.0			100.0	348.7	
12	5864.000	V			15.2			80.0	60.0			100.0	74.5	

Calculation

Over Limit [dB] = (Read Level[dB μ] + Ant Factor[dB/m] + Cable Loss [dB] – Preamp Factor [dB]+ ATT[dB]) – Limit Line[dB μ]

Over Limit : Margin, Read Level : Reading value, Ant Factor : ANT Factor,

Cable Loss : Cable loss, Preamp Factor : Preamp Factor, ATT : Attenuator Factor

* Exclusion Band : 5.7 GHz, 5.8 GHz



_

3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Report No.: KES-E2-19T0014 Page (47) of (65)

Harmonic Current Emissions and Voltage Fluctuations and Flicker

Average harmonic current results						
Hn	Ieff [A]	% of Limit	Limit [A]	Result		
		N/A				
L	reate loss than 0 6% of					

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr

Test Data - Harmonics (continued)

Maxin	Maximum harmonic current results							
Hn	Ieff [A]	% of Limit	Limit [A]	Result				
	I	N/A	l					
L		the input current measur						

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Report No.: KES-E2-19T0014 Page (49) of (65)

Test Data - Voltage Fluctuations

Maximum Flicker results

	EUT values	Limit	Result
Pst		N/A	
Plt			
dc [%]			
dmax [%]			
Tmax [s]			


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Report No.: KES-E2-19T0014 Page (50) of (65)

Test Setup Photos and Configuration

Conducted Voltage Emissions

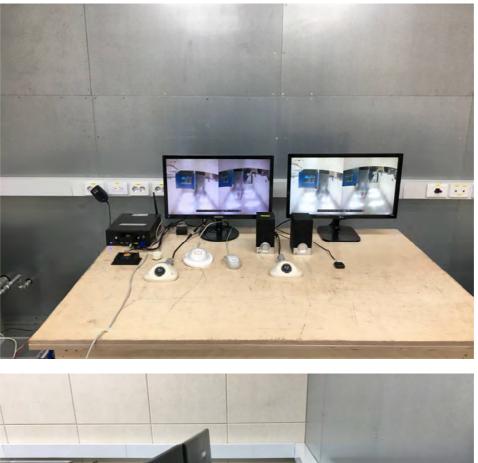



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



Report No.: KES-E2-19T0014 Page (51) of (65)

Conducted Emissions at Telecommunication Ports



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



Report No.: KES-E2-19T0014 Page (52) of (65)

Radiated Electric Field Emissions(Below 1 础)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



Report No.: KES-E2-19T0014 Page (53) of (65)

Radiated Electric Field Emissions(Above 1 础)

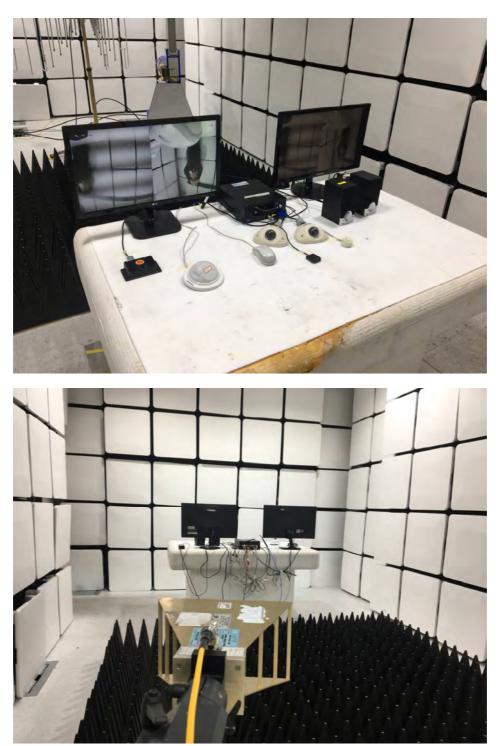

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



Report No.: KES-E2-19T0014 Page (54) of (65)


Harmonic Current Emissions and Voltage Fluctuations and Flicker

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Report No.: KES-E2-19T0014 Page (55) of (65)

Electrostatic Discharge

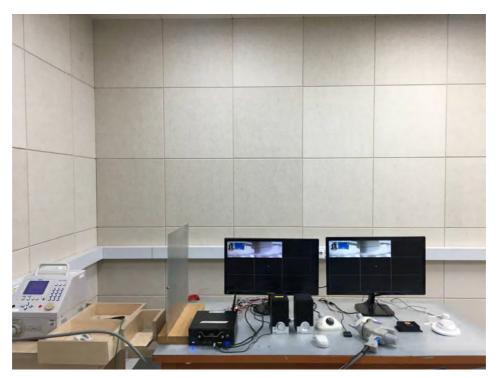

Radiated Electric Field Immunity



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Report No.: KES-E2-19T0014 Page (56) of (65)

Electrical Fast Transients/Bursts




Surge Transients



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Report No.: KES-E2-19T0014 Page (57) of (65)

Conducted Disturbance

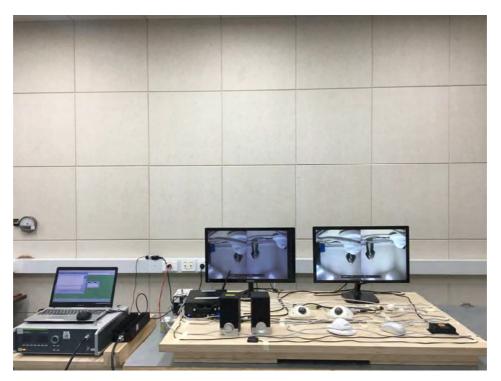

Power Frequency Magnetic Field Immunity



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Report No.: KES-E2-19T0014 Page (58) of (65)

Voltage Dips and Short Interruptions

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Report No.: KES-E2-19T0014 Page (59) of (65)

E.U.T External Photographs



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Report No.: KES-E2-19T0014 Page (60) of (65)

EUT Internal Photographs

(Internal View)







3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Report No.: KES-E2-19T0014 Page (61) of (65)

EUT Internal View – Board 1

(Top)

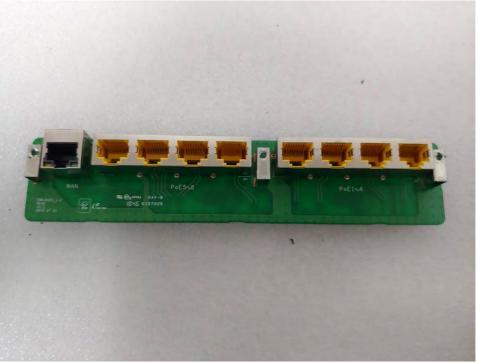

(Bottom)

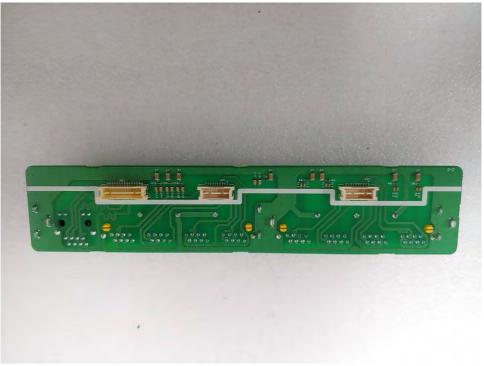


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Report No.: KES-E2-19T0014 Page (62) of (65)

EUT Internal View – Board 2

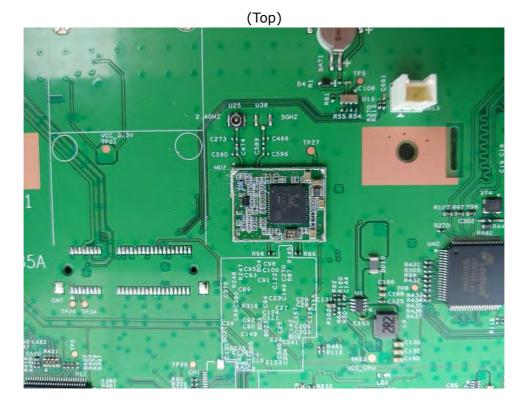

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Report No.: KES-E2-19T0014 Page (63) of (65)

EUT Internal View – Board 3

(Top)



(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Report No.: KES-E2-19T0014 Page (64) of (65)

EUT Internal View – Board 4

(Top)

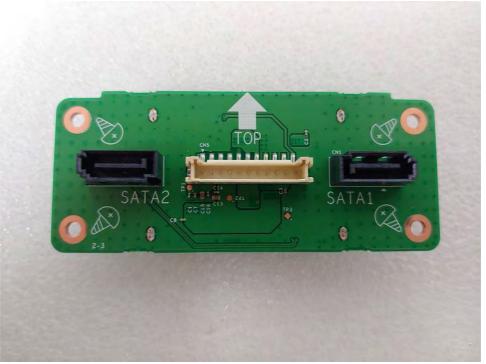

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. The authenticity of the test report, contact shchoi@kes.co.kr



3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea Tel: +82-31-425-6200 / Fax: +82-31-424-0450 www.kes.co.kr Report No.: KES-E2-19T0014 Page (65) of (65)

Label and Location

